


Pocket Size Network Parallel-Printer Server

ACT-WF5800P



< APPLICATION >

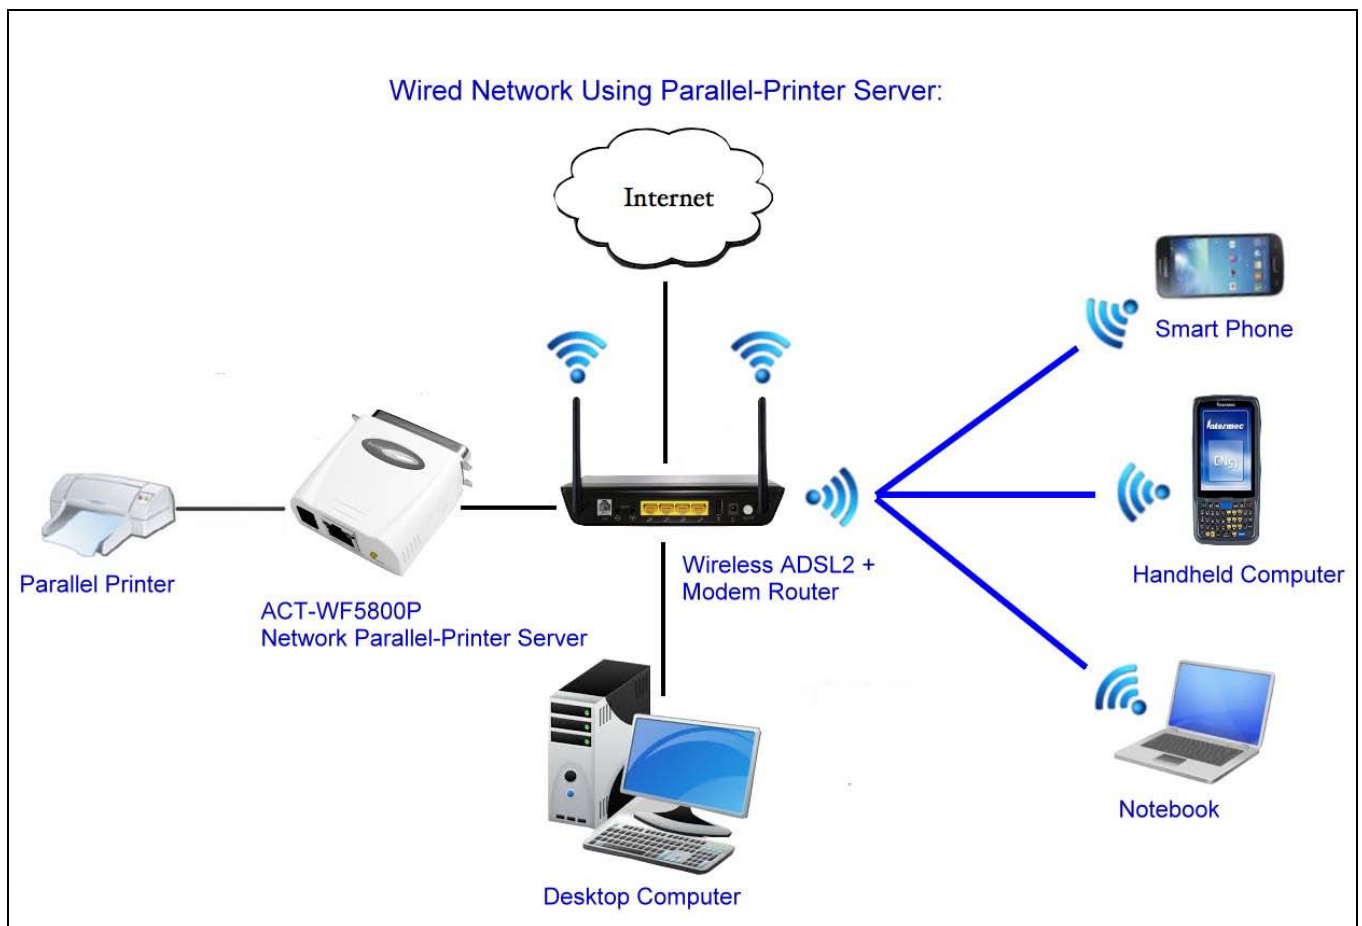

Pocket Size Network Parallel-Printer Server

ACT-WF5800P

Specifications

❖ A. Interfaces

Parallel:	DB-36-pin female Centronics port
LAN Port:	10/100Mbps compliant with IEEE 802.3/802.3u standard, 10/100Mbps auto-sensing, RJ-45 (UTP) connector, Auto-crossover

❖ B. Printer Server Specification

Network O S Support:	Win 9X/Me/NT/2000/XP/2003/Vista/7/8/10, Mac OS X 8.1 or higher, Unix/Linux, and Netware (Bindery/NDS)
Printing Protocol Support:	TCP/IP, LPR, IPX, NetBEUI, AppleTalk, SMB Over IP
DHCP (client) Support:	Yes
IPP Support:	Yes
Print Job Log:	Yes
E-mail Alert Support:	Yes
Default IP Address:	192.168.0.10; DHCP: Off
Management:	Web interface, PSAdmin
Software Upgradeable:	Web interface, PSAdmin, TFTP
Rendezvous (Bonjour) Support:	Yes
Windows Print Monitor Technology:	Yes
SNMP & HP Web JetAdmin Support:	Yes

❖ C. Hardware Specification

CPU:	ARM7 based SoC
SPI Flash:	1 Mbytes
System Memory:	2Mbytes SDRAM
Parallel Port:	1 DB-36-pin male Centronics port
LAN Port:	1 10/100Mbps compliant with IEEE 802.3/802.3u standard, 10/100Mbps auto-sensing, RJ-45 (UTP) connector
Transmission Distance:	Wire 100M;
LED Indicator:	Yellow (Power/Status), Green (100Mbps), Yellow (10Mbps)
Power Adapter:	DC 5V/1 A, switching, mini-sized
EMI Certifications:	CE / FCC Class B

Pocket Size Network Parallel-Printer Server

ACT-WF5800P

Temperature:	Operating : 0 ~ 50 °C;	Storage : -5 ~ 65 °C
Humidity:	Operating : 0 ~ 70 %;	Storage : 0 ~ 80 %

❖ E. Dimension / Weight:

56 mm (2.20") L X 57 mm (2.24") W X 22 mm (0.87") H /
50.6 g (1.78 oz)

The only IrDA[®] adapter supplier that has test tools to help your system to be IrDA[®] compliant !

ACTiSYS Corporation

921 Corporate Way
Fremont, CA 94539
U.S.A.

Tel: +1-510-490-8024

Fax: +1-510-623-7268

E-mail: info@actisys.com

Web Site: <http://www.actisys.com>

