

TECHNICAL SPECIFICATIONS

VIDEO	
Format	HDMI 1.3 (HDCP Compliant)
Resolutions	800x600, 1024x768, 1280x1024, 1366x768, 1920x1200, 480i, 720p, 1080i, 1080p, 4K x 2K @30Hz @24bit
Transmission Distance	450 feet (137 meters)
Color Depth	Deep Color 36/30/24 Bit at 1080p and 3D
Audio Format	Up to PCM 8 channel, Dolby Digital TrueHD, and DTS-HD Master Audio
IR Range	38kHz, 56kHz
Video Bandwidth	10.2Gbps
Input Video Signal	1.2 Volts P-P
Input DDC Signal	5 Volts (TTL)
I/O CONNECTOR (Transmitter)	
Input	8 x (HDMI-A) 19PIN Socket 8 x 3.5mm Jack for IR Receiver
Output	8 x RJ45 Jack
I/O CONNECTOR (Receiver)	
Input	1 x RJ45 Jack 1 x 3.5mm Jack for IR Receiver
Output	1 x 3.5mm Jack for IR Emitter 1 x HDMI-A 19PIN Socket
MECHANICAL - Transmitter	
Dimensions	17"H x 6"W x 1.7"D
Weight	3.26 lbs
Power	110/220V
ENVIRONMENTAL	
Operating Temp.	+0 to +40° C (+32° to 104° F)
Humidity	10% to 85% (Non-condensing)
Storage Temp.	-20° to +60°C (-4° to +140° F)
SAFETY	
Certificate	FCC, CE, RoHS
Power Adapter	UL, CE, FCC, RoHS

WHAT'S IN THE BOX

PART NO.	DESCRIPTION
RK8-HDX-ULT-S	Rack for 8 HDMI & IR Extenders over a Single Cat5e/6 Cable. Includes: [RK8-HDX-ULT-TX and (CCWPWR)]
	Quick Start Guide

OPTIONAL

PART NO.	DESCRIPTION
HDX-ULT-RX-S	HDX Receiver. HDMI Receiver over Cat5e/6 STP. Includes: [HDX-ULT-RX & (PS12VDC2A)]

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.

20180212



Designed and Manufactured in the USA

800.AVI.2131

Tel: (818) 503-6200 | Fax: (818) 503-6208
11651 Vanowen St. North Hollywood, CA 91605

SmartAVI.com

Smart-AVI
SMART AUDIO VIDEO INNOVATION

RK8-HDX-ULT

8-Port HDMI, IR, RS232 and Power
Extender Rack Over Cat5e/6



Consolidate up to eight 4K HDMI extenders in one powered rack unit to transmit HD signals up to 450 feet away using Cat5e/6 cables.

Quick Start Guide

INTRODUCTION

The RK8-HDX-ULT is the perfect solution for extending 4K HDMI signals to 8 remote locations 300 feet via PoE or up to 450 feet when both sides are powered, ensuring peak performance when transmitting ultra-high quality picture resolutions. The RK8-HDX-ULT is the perfect extender solution for any system, and works in tandem with SmartAVI matrixes for robust routing configurations. Plus, with RS-232 and IR remote control, taking command is convenient and easy every time!

It is the ideal way to consolidate up to eight workstation computers into one location. It is fully compatible with MAC, PC and LINUX HDMI standards. Up to eight displays can be extended easily from a rack without the mess or expense of multiple extenders. Rather than buy multiple extenders for rack components, and having to find power strips or numerous power outlets for the adapters, the SmartAVI rack series of extenders allows for up to eight transmitters and eight receivers with only one power supply.

Whether it's for a home entertainment system or a commercial installation, the RK8-HDX-ULT delivers flexibility and control. Don't let the distance bring your system down: let the RK8-HDX-ULT extend your reach today!


FEATURES

- Extends HDMI, IR, and Power Output over Cat5e/6
- Extends IR Control Signals for Remote Control
- Supports 1080p/60fps and 4K/30Hz resolution
- Supports Power over Ethernet (PoE) up to 300 ft
- Transmits up to 450 ft when both sides are powered
- Data Signals up to 3.4Gbps
- HDCP compliant; EDID learning
- Bi-directional IR and RS-232 control
- LED status indicators
- Rack mountable
- Up to 8 units on single rack

HARDWARE INSTALLATION

1. Before connecting, make sure all sources are powered down.
2. Connect an HDMI cable from the HDMI source to the HDMI IN port of the RK8-HDX-ULT transmitter.
3. Connect an IR emitter (optional) to the IR OUT port on the transmitter.
4. Connect the RK8-HDX-ULT transmitter to the HDX-ULT receiver using a CAT5e/6 cable (up to 450ft).
5. Connect an IR receiver (optional) to the IR IN port on the receiver.
6. Connect an HDMI cable from the HDMI OUT port on the RK8-HDX-ULT receiver to the HDMI display.
7. Connect the power on the HDX-ULT transmitters by plugging in their power adapters (12VDC2A) or provide 12VDC input from the rear DC input port.
NOTE: If the RX side has a connected DC adapter, the TX can get the DC power over the CAT5e/CAT6 cable, so leave the DC input port empty. Only 1 power supply is required for both units. (In certain cases, if the receiver has too much drop off power, we recommend to connect a 12V DC power supply to each receiver.
8. Power on the HDMI source, displays and speakers. The RX will read the EDID from the monitor, and then pass the data into the TX automatically.

INSTALLATION NOTE: Do not stack receiver units. Stacking inhibits heat distribution.

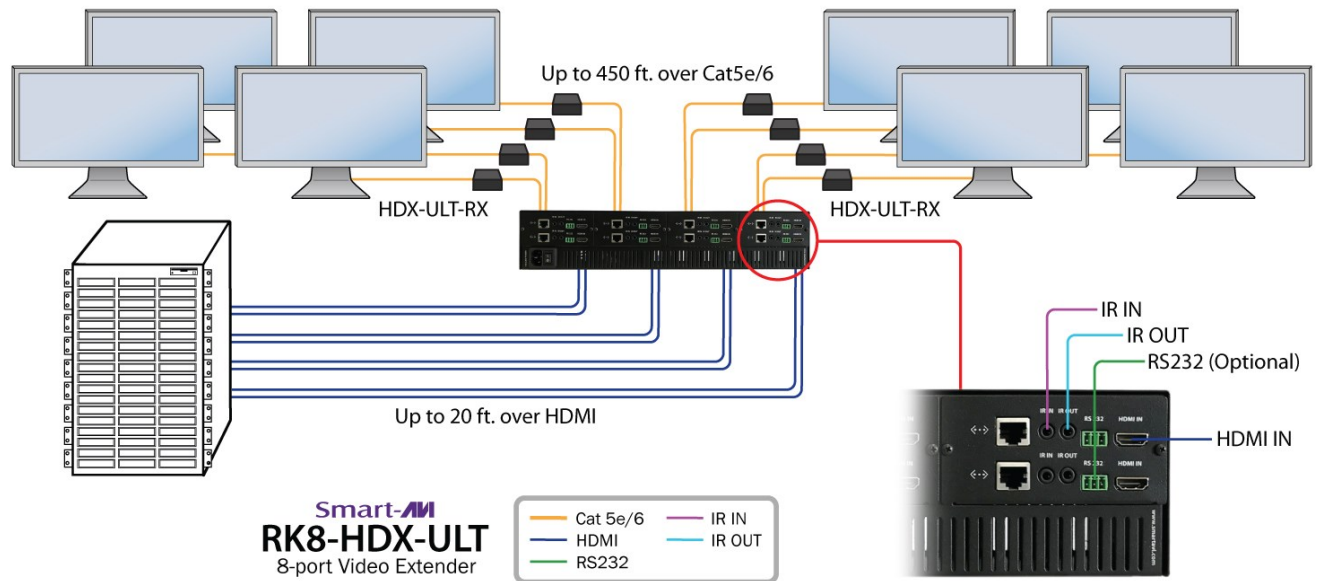

Front View



Rear View

