


Instruction Manual

SPECIFICATION

Type : 4WD 1/14 SC
Length : 360mm (14.17 inch)
Width : 210 (8.26 inch)
Wheelbase : 225mm (8.86 inch)
Weight : 1.08kg (2.376 pounds)
Tire Type : LC SC
Chassis : Plastic
Motor : 4500KV 2838 brushless or brush motor
ESC : Brushless or brush
Radio Control : 2.4GHz Technology
Batteries : 7.2V NiMH
Shock Type : Plastic-threaded, oil-filled,coil-over

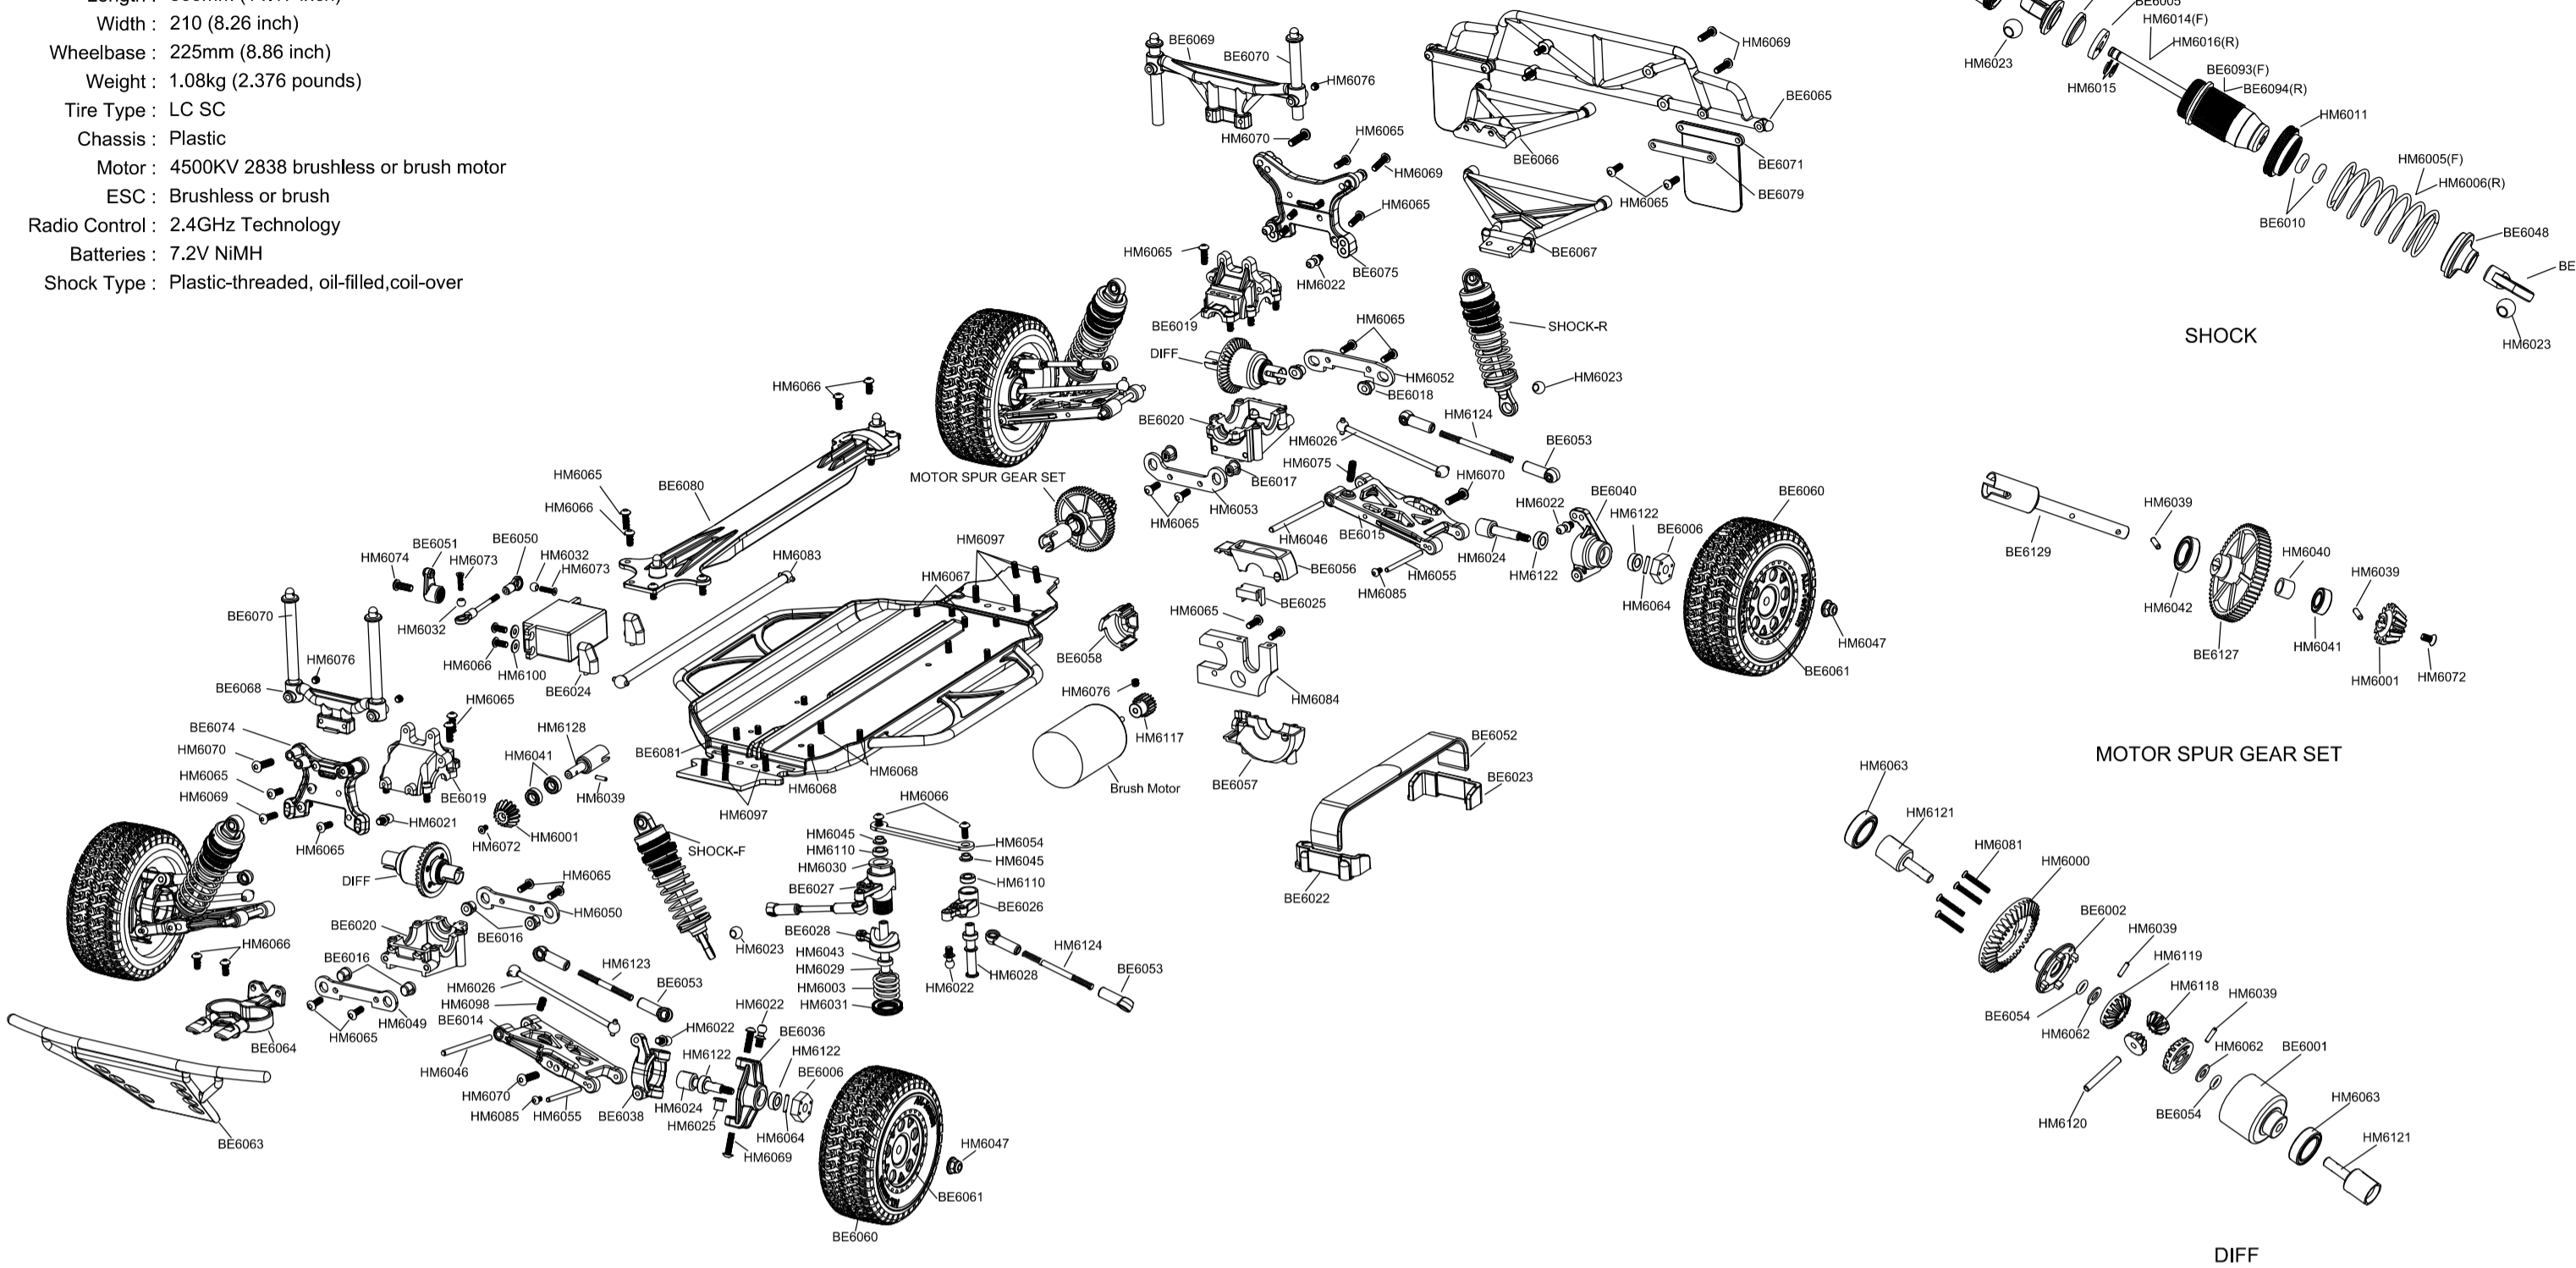

Spare part package #	Spare part #	Spare part name
(L6014)	HM6000	37T RING GEAR
(L6014)	HM6001	15T PINION GEAR
(L6027)	HM6002	MOTOR MOUNT
(L6023)	HM6003	STEERING SPRING
(L6022)	HM6010	FRONT SHOCK BODY
(L6031)	HM6022 4.3	BALL SHORT
(L6021)	HM6023 5.8	BALL
(L6017)	HM6024	AXLE
(L6007)	HM6025	SWERVE BUSHING
(L6018)	HM6026	F&R DOGBONE
(L6030)	HM6028	LEFT STEERING POST
(L6030)	HM6029	RIGHT STEERING POST
(L6023)	HM6030	STEERING POST
(L6023)	HM6031	STEERING NUT
(L6024)	HM6032	4.0 BALL
(L6012)	HM6039	PIN 1.5X6
(L6012)	HM6040	SPACER BUSH
(L6012)	HM6041	BEARING 4X8X3
(L6012)	HM6042	BEARING 7X11X3
(L6042)	HM6043	BEARING 4X7X2.5
(L6023)	HM6045	STEERING LINK BUSHING
(L6006)	HM6046	HINGE PIN
(L6041)	HM6047	M3 FLANGE LOCK NUT
(L6024)	HM6048	SERVO CONNECTING LINK
(L6011)	HM6049	SUSPENSION MOUNT FF
(L6011)	HM6050	SUSPENSION MOUNT FR
(L6011)	HM6052	SUSPENSION MOUNT RR
(L6011)	HM6053	SUSPENSION MOUNT RF
(L6023)	HM6054	STEERING PLATE
(L6006)	HM6055	LOWER ARM SHAFT

- (L6015) HM6062 WASHER 3X6X0.5
- (L6042) HM6063 BEARING 8X12X3.5
- (L6016) HM6064 PIN 1.5X8
- (L6041) HM6065 TM2.6X8mm
- (L6041) HM6066 TM2.6X6mm
- (L6041) HM6067 KM2.6X6mm
- (L6041) HM6068 KM2.6X8mm
- (L6041) HM6069 TM2.6X10mm
- (L6041) HM6070 TM3.0X12mm
- (L6041) HM6071 TM3.0X18mm
- (L6041) HM6072 KM2.0X4mm
- (L6041) HM6073 KM2.0X8mm
- (L6040) HM6074 TM3.0X8mm
- (L6006) HM6075 SET SCREW M3x10
- (L6012) HM6076 SET SCREW M3x3
- (L6041) HM6078 TM2.0X6mm
- (L6050) HM6079 R BUTTON
- (L6041) HM6080 M3 NUT
- (L6041) HM6081 KB1.4X10mm
- (L6037) HM6083 LONG MIDDLE DOGBONE
- (L6041) HM6085 TM2.0X4mm
- (L6041) HM6096 TM3.0X6mm
- (L6041) HM6097 KM2.6X10mm
- (L6006) HM6098 SET SCREW M3x6
- (L6024) HM6100 PW2.6X6X0.5
- (L6082) HM6118 10 T RING GEAR
- (L6082) HM6119 16 T RING GEAR
- (L6082) HM6120 PIN 2.0X15.8
- (L6082) HM6121 DIFF ODRIVE
- (L6015) BE6001 DIFF HOUSING
- (L6015) BE6002 DIFF COVER
- (L6016) BE6006 WHEEL HEX
- (L6006) BE6014 FRONT SUSPENSION ARM
- (L6006) BE6015 REAR SUSPENSION ARM
- (L6011) BE6016 SUSPENSION ARM ADJUSTER A

(L6011) BE6017 SUSPENSION ARM ADJUSTER B
(L6011) BE6018 SUSPENSION ARM ADJUSTER C
(L6010) BE6019 DIFF GEAR BOX UPPER HOUSING
(L6010) BE6020 DIFF GEAR BOX BOTTOM HOUSING
(L6008) BE6022 FRONT POSITIONER MOUNT
(L6008) BE6023 REAR POSITIONER MOUNT
(L6024) BE6024 SERVO MOUNT
(L6012) BE6025 SLIPER BRACE
(L6023) BE6026 BELLCRANK LEFT
(L6023) BE6027 BELLCRANK RIGHT UP
(L6023) BE6028 BELLCRANK RIGHT BELOW
(L6007) BE6036 SPINDLE CARRIER L
(L6007) BE6037 SPINDLE CARRIER R
(L6007) BE6038 LEFT SPINDLE
(L6007) BE6039 RIGHT SPINDLE
(L6007) BE6040 LEFT REAR HUB
(L6007) BE6041 RIGHT REAR HUB
(L6009) BE6046 SHOCK POST
(L6024) BE6050 4.0mm CUP
(L6024) BE6051 SERVO HOM
(L6008) BE6052 BATTERY STRAPS
(L6019) BE6053 BALL CAP
(L6015) BE6054 O-RING 3X5
(L6028) BE6056 SPUR GEAR COVER TOP
(L6028) BE6057 SPUR GEAR COVER BOTTOM
(L6028) BE6058 GEAR COVER
(L6003) BE6060 SC TIRE
(L6003) BE6061 SC WHEEL
(L6039) BE6063 FRONT BUMPER
(L6039) BE6064 FRONT BUMPER MOUNT
(L6039) BE6065 REAR BUMPER
(L6039) BE6066 REAR BUMPER MOUNT UP
(L6039) BE6067 REAR BUMPER MOUNT DOWN
(L6033) BE6068 FRONT BODY MOUNT

(L6033) BE6069 REAR BODY MOUNT
(L6033) BE6070 BODY POST
(L6039) BE6071 MUD FLAP
(L6035) BE6072 RIGHT SAFEGUARD
(L6035) BE6073 LEFT SAFEGUARD
(L6039) BE6079 MUD FLAP WASHER
(L6036) BE6080 SC BRACE SPACER
(L6045) SERVO
(L6046) Transmitter
(L6056) Receiver
(L6049) NiMH battery
(L6052) 1/14 SC BODY(PVC)
(L6055) 1/14 SC BODY(PC)

*FOR PLASTIC&BRUSH VERSION:

(L6070) BE6081 PLASTIC CHASSIS PATE
(L6071) BE6074 PLASTIC FRONT SHOCK TOWER
(L6071) BE6075 PLASTIC REAR SHOCK TOWER
(L6073) HM6005 FRONT SHOCK SPRING
(L6073) HM6006 REAR SHOCK SPRING
(L6073) HM6009 SHOCK UPPER CAP
(L6073) HM6011 SHOCK ADJUSTOR
(L6073) HM6014 FRONT SHOCK SHAFT
(L6073) HM6015 E-RING 2.3
(L6073) HM6023 5.8 BALL
(L6073) HM6111 SIX JAW CRAMP
(L6073) BE6005 SHOCK PISTON
(L6073) BE6012 DIAPHRAGM
(L6073) BE6010 O-RING 2.8x6.6x1.9
(L6073) BE6047 SHOCK TOP BALL CAP
(L6073) BE6048 SHOCK SPRING RETAINER
(L6073) BE6049 SHOCK BALL END
(L6073) BE6093 PLASTIC FRONT SHOCK BODY
(L6073) HM6016 REAR SHOCK SHAFT
(L6073) HM6006 REAR SHOCK SPRING
(L6073) BE6094 PLASTIC REAR SHOCK BODY
(L6074) HM6123 BRUSH TURNBUCKLE L35
(L6074) HM6124 BRUSH TURNBUCKLE L40
(L6075) BE6127 SPUR GEAR
(L6076) BE6129 PINION GEAR SHAFT
(L6076) BE6128 PINION GEAR SHAFT
(L6077) 30 BRUSH MOTOR
(L6078) BRUSH ESC 25A
(L6079) HM6110 OIL BEARING 4x7x2.5
(L6079) HM6122 OIL BEARING 4x8x3
(L6080) HM6117 Pinion Gear 19T
(L6081) HM6084 MOTOR MOUNT

TACON-RC guarantees this product to be free of manufacturing faults and material defects. This product has been checked and fine tuned individually by professional staff and quality control staff. The warranty does not cover any component parts damaged by use and modification. Please visit <http://www.taconrc.com> for updated product information.

This product is not a toy. It is not recommended for children under 14 years old and any minor should be accompanied by an adult when operating. This product is a precision machine that requires proper assembly and setup to avoid accidents. Failure to take caution when operating this product may result in serious injury or property damage. It is the owner's responsibility to operate this product in a safe manner. Manufacturer and its distributors are not responsible in any way for any and all bodily injury(s) and/or property damage that may occur from the use of or caused by in any way this product.

WARNINGS

- Do not attempt to disassemble or modify any of the product components without the assistance of an experienced RC user.
- Only use the correct type of battery to operate. Using any wrong type of battery will damage the product and possibly make it dangerous to operate.
- The motor(s) may get hot during use. Always allow 10-15 minutes between each run for the motor to cool down. This will prolong the life of your product.
- Choose an appropriate operating site consisting of flat, smooth ground, and clear open field. Do not operate near buildings, high voltage cable lines, or trees to ensure safety. RC models are prone to accidents, failures, and crashes due to a variety of reasons including, lack of maintenance, driver error, and radio interference. Drivers are responsible for their actions and damage or injury occurring during the operation.

- Do not operate in inclement weather, such as rain, wind, snow and darkness.
- The product is composed of precision electrical components. It is critical to keep the product away from moisture and other contaminants. Do not allow them to get wet. Electrical damage may occur that could affect safe operation.
- After each use, always allow the battery to cool down before recharging. When charging the battery pack, do not over charge! If batteries get hot during charging, discontinue charging immediately and disconnect the battery from the charger. Never leave battery unattended while charging. If you are unsure of how to charge this battery, please seek the advice of experienced RC users. Never let children charge the battery without adult supervision.
- Always turn on the transmitter before connecting the battery on the models. When turning off the model, always disconnect the battery first, and then turn off the transmitter. If the order is reversed, the model may become uncontrollable and cause serious damage.
- If you are in doubt of your ability to operate the model, we strongly recommend that you seek assistance from experienced RC users or join your local model flying club to gain the required knowledge and skill. As the manufacturer and distributor, we assume no liability for the use of this product.
- Before turning on your model and transmitter, please check to make sure no one else is operating under the same frequency. Frequency interference can cause your model, or other's models to crash. The guidance provided by experienced RC users will be valuable for the assembly, tuning, trimming, and actual first flight.
- Never allow batteries to run low or you might lose control of the model.
- You should complete a successful pre-run check of your radio equipment and model prior to each run.
- Plastic is very susceptible to damage or deformation due to extreme heat and cold climate. Do not store the model near any source of heat such as over or heater. Store the model indoors, in a climate-controlled, room temperature environment.

Charge the battery pack

Disconnect the battery from the charger when the charging process is completed. Do not charge the battery unattended at all times.

Lithium Polymer (LiPo) Battery Warning

- Never charge a lithium polymer battery with a charger designed for NiCd, NiMH, or any other type of battery chemistry. Use ONLY charger designed for LiPo Battery.
- Do not leave LiPo battery unattended during charging.
- Do not overcharge the battery.
- Always place the battery on a heat resistant surface alone when charging.
- Always put the LiPo battery inside a charging protection container while charging.
- Do not allow LiPo cells to overheat at any time. Cells which reach greater than 140 Fahrenheit (60 °C) will usually become damaged and will catch fire.
- Do not allow LiPo cells on or near combustible materials including paper , plastic, carpets, vinyl, leather, and wood, inside an R/C model or full size automobile.
- Do not over discharge LiPo; doing so will damage the battery.
- Do not expose LiPo cell to water or moisture at any time.
- Do not store battery near open flame or heater.
- Do not assemble LiPo cells or pre-assembled packs together with other LiPo cells or packs.
- Always store LiPo battery in secure location away from children.
- Always remove the LiPo battery if model is involved in any kind of crash. Carefully inspect the battery and connectors for even the smallest damage. CAUTION: cells may be hot!
- Do not allow the electrolyte to get into eyes or on skin. Wash affected areas immediately if they come into contact with electrolyte. Do not alter or modify connectors or wires of a LiPo battery pack.
- Always inspect the condition of the battery before charging and operation.
- Do not short circuit the LiPo battery.
- Do not have contact with a leaky/damaged battery directly.
- Do not charge battery out of recommended temperature rang (0°C-45°C)