

Technical Specifications

VIDEO	
Format	DVI-D Single Link
Maximum Pixel Clock	165 MHz
Input Interface (TX)	(1) DVI-D 29-pin female
Output Interface (RX)	(1) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @60Hz
DDC	5 volts p-p(TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
USB	
Signal Type	OHCI/UHCI (USB 1.1)
Input Interface (TX)	(1) USB Type B (Female)
Output Interface (RX)	(2) USB Type A (Female)
RS-232	
Input Interface	DB9 (Female)
Output Interface	DB9 (Female)
Control	@ 115 Kbps
IR	
Frequency Response	30KHz to 80KHz
Input Interface (RX)	(1) 3.5 mm (Female)
Output Interface (TX)	(1) 3.5 mm (Female)
OTHER	
Power	External 100-240 VAC/5VDC4A @20W
Dimensions	8.25 in W x 1 in H x 3.625 in D
Weight	1 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%
ORDER INFO	
Part No.	Description
SDX-PLUS-S	DVI-D, USB, RS232, Audio, over CAT5 Extender. Includes: [SDX-PLUS-TX, SDX-PLUS-RX, and 2 x (PS5VD4A-WLLMNT)]
SDX-PLUS-TX	DVI-D , USB 1.1 , RS232, CAT5/5e/6 Transmitter. Includes: [SDX-PLUS-TX, PS5VD4A-WLLMNT]
SDX-PLUS-RX	DVI-D , USB 1.1 , RS232, CAT5/5e/6 Receiver. Includes: [SDX-PLUS-RX, PS5VD4A-WLLMNT]

© Copyright 2016 SmartAVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.

Rack Mountable Option



Our SmartRack is the perfect solution to allow virtually all SmartAVI devices to be custom mounted in a standard 19" server rack. The SmartRack is fully adjustable and can secure/organize several devices.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

Smart-AVI
SMART AUDIO VIDEO INNOVATION

Installation Manual

SDX-Plus

Superior Range DVI-D, USB Keyboard and Mouse, RS-232 and IR Extender



Extend DVI-D video, USB Keyboard and Mouse, RS-232 and IR up to 400 feet over a single CAT5/5e/6 UTP cable

www.smartavi.com

Introduction

Using HDBaseT technology, the SDX-Plus DVI extender is capable of sending a DVI-D signal up to 400 feet over a single conventional and inexpensive CAT5 UTP cable. HDBaseT technology is superior to older DVI extenders that require special CAT6 shielded cable to go a short distance. The SDX-Plus also has USB keyboard and mouse, RS232 and IR extension, giving you the ability to control your displays or devices remotely.

Features


- Extends DVI-D up to 400 feet from the source
- Data recovery for digital video
- Supports up to 1920x1200 digital video resolution
- Automatic DDC Learning
- USB Keyboard and Mouse
- Uncompressed Video HDBaseT
- IR and RS-232 extension allows for remote control of displays
- External power adapter for transmitter and receiver unit
- Plug and play

To reach maximum distances with HDBaseT technology, it is recommended to use the best possible quality cable available. CAT5e/6 shielded cabling is ideal for best performance.

What's in the Box?

PART NO.	QTY	DESCRIPTION
SDX-Plus-RX	1	SDX-Plus Receiver. DVI-D + USB + RS-232 + IR Receiver over CAT5/5e/6
SDX-Plus-TX	1	SDX-Plus Transmitter. DVI-D + USB + RS-232 + IR Transmitter over CAT5/5e/6
Power Supply	2	PS5VDC4A

Product - Installation Diagram

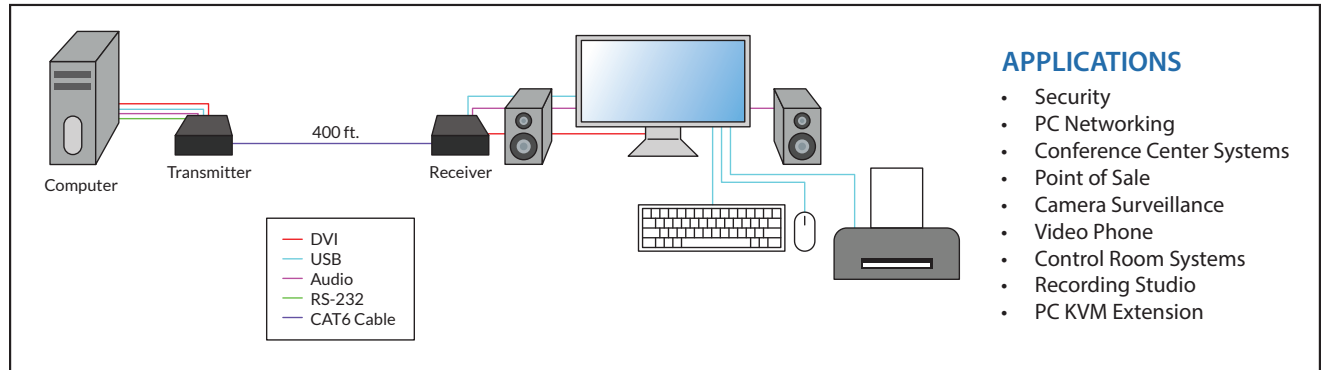

APPLICATIONS

- Security
- PC Networking
- Conference Center Systems
- Point of Sale
- Camera Surveillance
- Video Phone
- Control Room Systems
- Recording Studio
- PC KVM Extension

Connecting the SDX-Plus

1. Power off all devices.
2. Connect a DVI-D source (computer) to the DVI-D port on the SDX-Plus-TX.
3. Connect a USB source (computer) to the USB port on the SDX-Plus-TX.
4. Optionally connect RS-232 and IR for control functions.
5. Connect the SDX-Plus-TX to the the SDX-Plus-RX with one CAT5 UTP (Unshielded Twisted Pair) cable.
6. Connect a DVI-D compatible display to the DVI-D port on the rear of the SDX-Plus-RX.
7. Connect USB keyboard and mouse to the USB ports on the SDX-Plus-RX.
8. Optionally connect RS-232 and IR for control functions.
9. Connect the power to the SDX-Plus-RX and the SDX-Plus-TX.
10. Power on the display and then the computer.

The DDC of your display will be learned automatically.



SDX-Plus-TX Front



SDX-Plus-TX Back




SDX-Plus-RX Front



SDX-Plus-RX Back

The following is the wiring standard for terminating UTP/STP cable using RJ-45 connector:



Connectors: RJ-45
 Capacitance: 14 pf/ft (46.2 pf/m)
 Conductor Gauge: 24 AWG
 Impedance: 100 +/- 15 ohms