ELCO Lighting

Project name:

Fixture type:

Date:

Pex™ 4" Square Deep Reflector

Pex™ Precision die-cast trims with twist-&-lock system for easy Koto™ Module installation

Features

- 4″ Square Deep Reflector.
- Convenient twist-lock design for easy installation.
- Lamp: Koto™ LED Module.
- Wet location rated.

Technical Details

Construction: Diecast aluminum with a powder coated finish.

Installation: Twist-lock design allows for easy mounting onto the Koto™ LED Module.

Compatible Housing: Compatible with 4″ IC and non-IC housings.

Lamp: Koto™ LED Module.

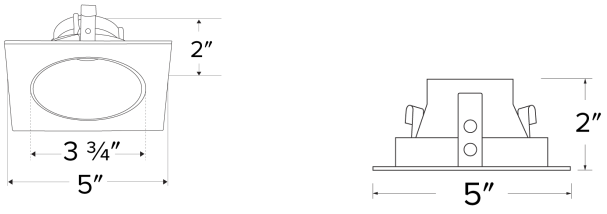

Dimensions:

Options

All White | **All Black** | **All Bronze**

Black with White Ring | **Chrome with White Ring** | **Haze with White Ring**

Product Number

Item	Finish
ELK4218H	Haze with White Ring

Product Number Builder Example: **ELK4218W**

Pex™ 4″ Square Deep Reflector	Finish
ELK4218	

W All White
BB All Black
BZ All Bronze
B Black with White Ring
C Chrome with White Ring
H Haze with White Ring

© ELCO Lighting 2022. All rights reserved • Rev. 03 Feb 2022 • ELCO Lighting reserves the right to make specification and design changes without notice.

Compatible Products

For use with **4" Koto™ Twist-&-Lock Trims**

Koto™ LED Module



Koto™ LED Module
ELK07 - ELK09

PRODUCT NUMBER BUILDER

Koto™ LED Module	Lumens	Color Temperature	Beam Angle
ELK			
	07 750 lm	**27** 2700K	**(blank)** 38° lens (Standard)
	09 950 lm	**30** 3000K	**-S** 18° lens
		35 3500K	**-N** 25° lens
		40 4000K	**-W** 60° lens
		SD Sunset Dimming (ELK09 Only)	

ACCESSORIES

Lens

EP731C	18° Lens
EP732C	25° Lens
EP733C	38° Lens
EP734C	60° Lens

**EP732C, EP733C, EP734C Included*

Reflectors

EP735C	15°
EP736C	25°
EP737C	38°
EP738C	60°

Secondary Optics

L45	Hex Louver
L46	Linear Louver
L47	Spread Louver

4" Koto™ Dedicated LED ICA Housings



4" ICA Maximum Adjustability Housing
New Construction

CAT NO.	SPECIFICATIONS
EL485ICA	Maximum Adjustability



4" ICA Housing
New Construction

CAT NO.	SPECIFICATIONS
EL490ICA	
EL490ICA-EM5	Emergency Battery Back-up (90 minutes)

4" ICA Housing
Remodel

CAT NO.	SPECIFICATIONS
EL490RICA	

2-Hour Fire Rated 4" ICA Housing
New Construction

CAT NO.	SPECIFICATIONS
EL48FICA	7 ½" Height - Sound Rated

© ELCO Lighting 2022. All rights reserved • Rev. 03 Feb 2022 • ELCO Lighting reserves the right to make specification and design changes without notice.

Compatible Products

For use with **4" Koto™ Twist-&-Lock Trims**

Koto™ Architectural LED Light Engine



Koto™ LED Light Engine
ELK19 - ELK21

PRODUCT NUMBER BUILDER

Koto™ LED Light Engine	Lumens	Color Temperature	Beam Angle
ELK	**19** 750 - 850 lm	**27D** 2700K	**(blank)** 38° lens (Standard)
	21 1100 - 1500 lm	**30D** 3000K	**-S** 18° lens
		35D 3500K	**-N** 25° lens
		40D 4000K	**-W** 60° lens
		SD Sunset Dimming (ELK19 Only)	

ACCESSORIES

Lens

EP731C	18° Lens
EP732C	25° Lens
EP733C	38° Lens
EP734C	60° Lens

**EP732C, EP733C, EP734C Included*

Reflectors

EP735C	15°
EP736C	25°
EP737C	38°
EP738C	60°

Secondary Optics

L45	Hex Louver
L46	Linear Louver
L47	Spread Louver

4" Koto™ Architectural Recessed Housings



4" High Lumen Maximum Adjustability ICA Housing
1500 lm (18.9W) w/ELK21 Series Module
Not for use with ELK19 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK79ICAD	120/277V - 0-10V/Triac/ELV



4" Shallow Maximum Adjustability ICA Housing
850 lm (14.7W) w/ELK19 Series Module
1100 lm (14.7W) w/ELK21 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK98ICA	120V - Triac/ELV
E4LK99ICAD	120/277V - 0-10V/Triac/ELV

4" Standard ICA Housing
750 lm (11.8W) w/ELK19 Series Module
950 lm (11.8W) w/ELK21 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK87ICA	120V - Triac/ELV
E4LK87ICA-EM1	Emergency Battery Back-Up
E4LK88ICAD	120/277V - 0-10V/Triac/ELV
E4LK88ICAD-EM1	Emergency Battery Back-Up

4" Standard ICA Housing
750 lm (11.8W) w/ELK19 Series Module
950 lm (11.8W) w/ELK21 Series Module
Remodel

CAT NO.	SPECIFICATIONS
E4LK87RICA	120V - Triac/ELV
E4LK88RICAD	120/277V - 0-10V/Triac/ELV

2-Hour Fire Rated 4" ICA Housing
750 lm (11.8W) w/ELK19 Series Module
950 lm (11.8W) w/ELK21 Series Module
New Construction

CAT NO.	SPECIFICATIONS
ELK93FICA	120V - Triac/ELV
ELK94TFICAD	120/277V - 0-10V/Triac/ELV

© ELCO Lighting 2022. All rights reserved • Rev. 03 Feb 2022 • ELCO Lighting reserves the right to make specification and design changes without notice.