

Unique™ 4" Round Baffle for Koto™ Module

One Piece die-cast trims with Twist-&-Lock system for easy installation



Features

- Convenient Twist-&-Lock design for ease of installation.
- Diecast construction for lasting quality.
- 5" O.D. - 3 7/8" I.D. - 1 3/4" H
- 35° tilt (for EL485ICA), 25° tilt (for EL490 Series).

Specifications


Wet Location UL Listed

Technical Details

Construction: Diecast aluminum with a powder coated finish.

Installation: Twist-lock design allows for easy mounting onto the Koto™ LED Module. Clips securely mount trim into the housing and keeps ring flush with ceiling.

Lamp: Koto™ LED Module.

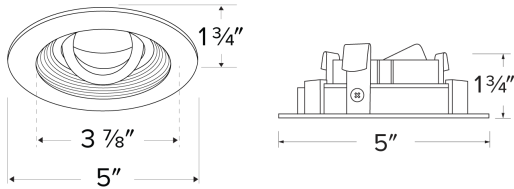

Dimensions:

Options



All White



All Bronze

Product Number

Item	Finish
ELK4713W	All White

Product Number Builder Example: ELK4713W

Unique™ 4" Round Baffle	Finish
ELK4713	

W All White
BZ All Bronze

Compatible Products



For use with Koto™ System 4" Trims

Koto™ Commercial Construction LED Light Engine



ELK19 ELK21
Koto™ LED Light Engine

PRODUCT NUMBER BUILDER

Koto™ LED Light Engine	Lumens	Color Temperature	Beam Angle
ELK	19 850 lm 21 1100 lm	27D 2700K 30D 3000K 35D 3500K 40D 4000K SDD Sunset Dimming	(blank) 38° lens (Standard) -S 18° lens -N 25° lens -W 60° lens

ACCESSORIES



Lens

- EP731C** 18° Lens
- EP732C** 25° Lens
- EP734C** 60° Lens



Reflectors

- EP735C** 15°
- EP736C** 25°
- EP737C** 38°
- EP738C** 60°



Hex Louver
L45

For a better glare shield



Linear Louver
L46

For a wide rectangular illumination pattern



Spread Louver
L47

For a symmetrical broadening of light beams



Clear Lens
L48

Protective clear glass lens

4" Commercial Construction Koto™ Dedicated LED ICA Housings



2-Hour Fire Rated
4" ICA Housing - 7 1/2" Height
New Construction



4" ICA Shallow Adjustability Housing - 4" Height
New Construction



4" ICA Housing - 5 1/2" Height
New Construction

CAT NO.	SPECIFICATIONS
ELK49FICA	120V - Triac/ELV
ELK49FICAD	120/277V - 0-10V/Triac/ELV

CAT NO.	SPECIFICATIONS
E4LK98ICA	120V - Triac/ELV
E4LK99ICAD	120/277V - 0-10V/Triac/ELV

CAT NO.	SPECIFICATIONS
E4LK87ICA	120V - Triac/ELV
E4LK87ICA-EM1	120V - Triac/ELV Emergency Battery Back-up (90 min)
E4LK88ICAD	120/277V - 0-10V/ Triac/ELV
E4LK88ICAD-EM1	120/277V - 0-10V/ Triac/ELV Emergency Battery Back-up (90 minute)



4" ICA Housing - 5 1/2" Height
Remodel

CAT NO.	SPECIFICATIONS
E4LK87RICA	120V - Triac/ELV
E4LK88RICAD	120/277V - 0-10V/Triac/ELV