



45361 HIGH OUTPUT ROUND FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

2 7/8"

Driver

included

Box

WATTS

15W

LUMENS

Up to 1077

KELVIN

CCT Selectable

PROJEC	T:			
TYPE:				
DATE:				
NOTES:				



2700K . 3000K . 3500K . 4000K . 5000K

CRI

90+

DIMMABLE

TRIAC/ELV

BEAM

ANGLE

38°

ADJUSTABLE

NO

SPECIFICATIONS

LIGHT HOUSING

2″

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

• Cut hole: ø2 7/8".

• Fixture: ø3 1/8" x 5"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver
- enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE


- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K |30K |35K |40K |50K • Delivered Lumen: 887 lm |942 lm |1040 lm |1077lm |1048 lm


CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH		
45361-029	Black		
45361-012	White		

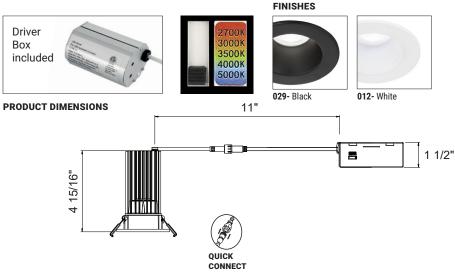



ACCESSORIES



45612-012 60″ 3 pin Connector



45363-016 NEW CONSTRUCTION SMASH PLATE 13 1/4" x 6 1/2" ø2 3/4″



All features, functionality and other product specifications are subject to change without notice.