



45367 ROUND GIMBAL



SPECIFICATIONS

 Max Ceiling thickness 5/8". • Approved for damp location.

enclosed in junction box.

• 1 x 8W Integrated LED COB.

• Beam angle: 38 degree.

IC

AIR TIGHT

ORDERING GUIDE

• Lumen maintenance 70% 50,000 hrs.

27K

• TRIAC and ELV dimming.

• IC Airtight Cast aluminum body. • Remodel application. C/W spring loaded clips.

• Mates to driver box with quick connector.

120 V Input class 2 constant current dimmable driver

• Min operating temperature (-4°F~104°F)(-20°C~-40°C).

• Delivered Lumen: 542 lm |578 lm |620 lm |633 lm |629 lm

FINISH

Black White

30K 35K 40K 50K

LIGHT HOUSING

DIMENSIONS

ELECTRICAL

LIGHT MODULE

Kelvin (CCT):

CERTIFICATIONS

• CRI: 90+

(II)

MODEL

45367-021

45367-014

• Cut hole: ø2 3/4". • Fixture: ø3 3/8" x 1 13/16"H.

3″

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT:	_
TYPE:	_
DATE:	
NOTES:	



2700K . 3000K . 3500K . 4000K . 5000K

₹	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
ø2 3/4"	8W	Up to 633	CCT Selectable	TRIAC/ELV	90+	38°	30°





FINISHES




PRODUCT DIMENSIONS

3/4"





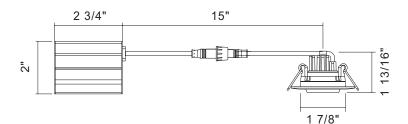

ACCESSORIES

45612-012 60″ 3 pin Connector

JA8 COMPLIANT



45363-016 **NEW CONSTRUCTION** SMASH PLATE 13 1/4" x 6 1/2" ø2 3/4"



NO IC BOX REQUIRED