


Project:

Glide LED Pendant w/Downlight Spec Sheet

SKU: 2352.03 Learn more at:
<https://sonnemanlight.com/glide-led-pendant-w-2fdownlight>

Description: A flared "V" shaped linear form, with a continuous radius end, defines a minimal profile sleekness is designed to provide balanced LED illumination along a linear situation for both general and task applications.

Type #:

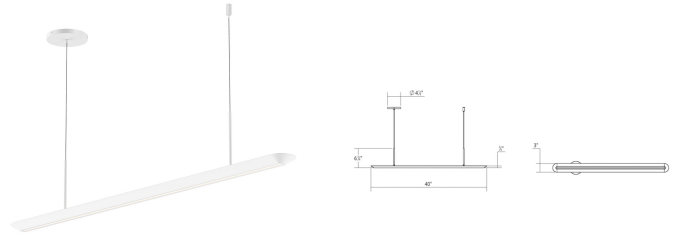

Dimensions

Height:	6.75"
Width:	40"
Length:	3"
Canopy/Backplate/Base:	4.5"
Hanging Details:	6"
	Adjustable Cord
Canopy/Backplate/Base Height:	0.5"

Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	2
Input Voltage:	120VAC
Wattage:	20
Initial Lumens:	2000
Delivered Lumens:	1470
Color Temperature:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Outlet Box
Dimming Type:	TRIAC/ELV
Bulb Max Wattage:	20

Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Adapter Available
Minimum Hanging Height:	8.5"
Maximum Hanging Height:	80.5"

Shipping

Carton 1 L x W x H:	46" X 8" X 7"
Carton 1 Gross Weight:	5 LBS

Shade

Shade 1 Material:	Aluminum w/Acrylic
-------------------	--------------------

Available Finishes

Available Finishes: Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)

General Listings

Features:	Damp Rated
Certification:	cETL
Color/Finish:	Satin White (.03)
Dark Sky Friendly:	N