

# COLLIER 84 CHANDELIER

## PRODUCT FEATURES

- Solid faceted crystal manufactured in Czech Republic . Custom engineered natural brass connectors
- This item is made of natural brass. It is a living finish that will patina and warm with age which adds richness. If it gets an uneven patina or spots, a brass cleaner can restore the finish
- Remote and surface mount driver options available. An optional mud-in canopy kit can be ordered separately in conjunction with the 'Remote' driver option for the most minimal ceiling appearance.
- Contact factory for custom configurations
- For minimal ceiling appearance, order the optional mud-in canopy kit in conjunction with the 'Remote' driver. It can be viewed [here](/Products/Fixtures/Accessories/Collier-Mud-in-Plate)
- Protected by a 5-year warranty. Please visit the "About Us" Page on [techlighting.com](http://techlighting.com) for more for warranty details. Patent Pending



Natural Brass

## LAMPING

Includes 28.7 watt, 1582 total delivered lumens, 90 CRI 2700K LED modules. Remote dimmable with most LED compatible ELV and TRIAC dimmers. 277V dimmable with 0-10V dimmers. Surface dimmable with ELV and TRIAC dimmers. Remote 120V or 277V. Surface 120V-277V. Can be installed on a sloped ceiling up to 45°.



Natural Brass

Polished Nickel

## ORDERING INFORMATION

700CLR	SHAPE OR SIZE	FINISH	LAMP
	84 84	NB NATURAL BRASS	-LED927R INTEGRATED LED 90 CRI 2700K 120V (REMOTE)
		N POLISHED NICKEL	-LED927R-277 INTEGRATED LED 90 CRI 2700K 277V (REMOTE)
			-LED927S INTEGRATED LED 90 CRI 2700K 120V-277V UNIVERSAL (SURFACE)

700CLR \_\_\_\_\_

JOB NAME \_\_\_\_\_

NOTES \_\_\_\_\_


\_\_\_\_\_



# COLLIER 84 CHANDELIER

## SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Crystal
NET WEIGHT	
HEIGHT	92.9in
WIDTH	2in
LENGTH	2in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
MIN. HANGING HEIGHT	92.9in
MAX HANGING HEIGHT	92.9in
TOTAL CORD LENGTH	
TOTAL STEM LENGTH	
STEM QTY	
SLOPED CEILING ADAPTABLE?	Yes 45° Max
GENERAL LISTING	ETL Listed
INCLUDES	

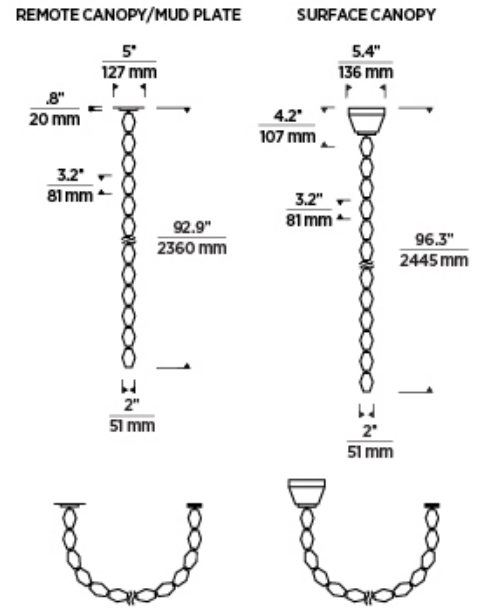

## LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1582		
WATTS		28.7		
MAX WATTAGE PER BULB		28.7W		
INPUT VOLTAGE		120VV 277VV Universal 120V-277VV		
DIMMING TYPE*		ELV, TRIAC 0-10V		
CCT		2700K		
CRI		90 CRI		
LED LIFETIME		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

\*Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)

\*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

