

The Ash pendant is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and either an acrylic diffuser that creates diffused light from under the shade creating an intriguing column of light, or a clear lens hidden within the shade for beautifully even LED illumination with minimal uplight.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	619 or 1115 with clear cylinder 400 or 863 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
ADJUSTABILITY	Adjustable stem length (3", 6" and 12"). Integrated ball joint that accommodates sloped ceiling up to 45°.
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	6.5 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

Hanging outdoor fixtures are not meant for areas with high winds, which can cause damage to the fixture.

### ORDERING INFORMATION

PRODUCT	CRI/CCT	LENS	FINISH	VOLTAGE
7000PASH	L927	LED LO-OUTPUT 90 CRI, 2700K	C CLEAR CYLINDER	UNV 120V-277V UNIVERSAL
	H927	LED HI-OUTPUT 90 CRI, 2700K	D CLEAR LENS	
	L930	LED LO-OUTPUT 90 CRI, 3000K	H CHARCOAL	
	H930	LED HI-OUTPUT 90 CRI, 3000K		


RIGID STEM ONLY (ADJUSTABLE 3", 6" AND 12" LENGTHS).



ASH PENDANT  
shown in charcoal/clear cylinder



ASH PENDANT  
shown in bronze/clear lens

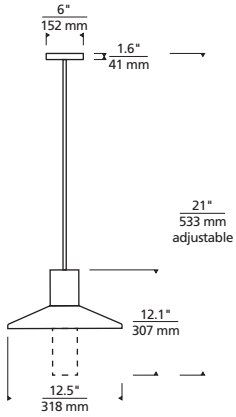


Ash Pendant

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASH 16 WITH CYLINDER

- Total Lumen Output: 619
- Total Power: 8
- Luminaire Efficacy: 77
- Color Temp: 2700K or 3000K
- CRI: 90
- BUG Rating: B0-U1-G0

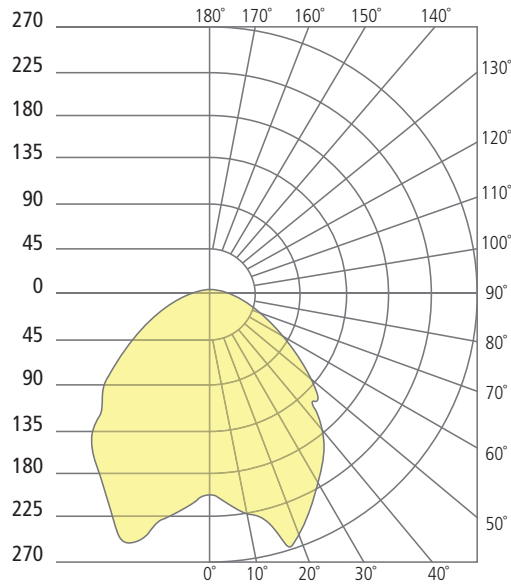

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

VISUAL COMFORT & Co.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400