

LANDSCAPE DomeTop LAWN LIGHTS



Great new look for Landscape Lighting!
Features 2 level cutoff protection.

Rugged die cast aluminum housing
with durable powder coating.


Socket with all copper electrical parts and 20" leads

Quick and secure installation with one
corrosionproof screw


Threaded, gasketed globes for durable
weatherproofing and easy relamping

12" color matched mounting stem
with 1/2" threads available


Includes easy mounting 1/2" threaded nipple

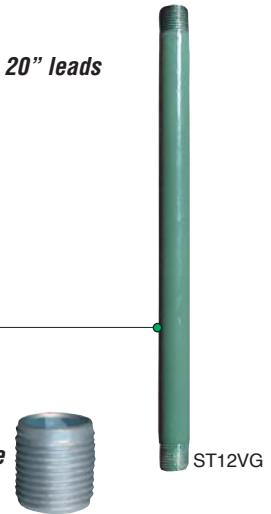

2 Level Light Cutoff




Wide light spread for wider walkways & parking
lots where maximum light is required

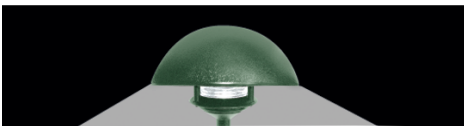

Full Cutoff for narrow walkways & glare free
lighting in garden areas

Quick and Easy Adjustment

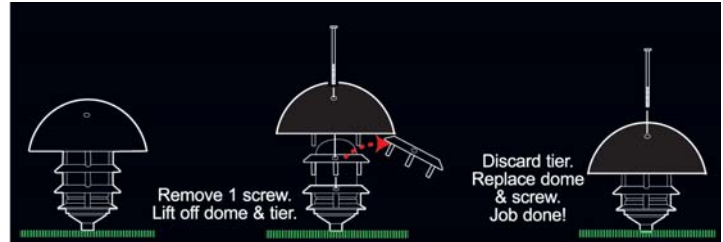

Product Information

Incandescent (120 volt)

Lamp not supplied

Compact Fluorescent (120 volt)

Lamp supplied with fixture.
Minimum operating temperature 32°
NPF 120 volt ballast

Lamp Watts	Lamp Type	Lamp Base	Initial Lumens	Lamp Hours
75	A-19	Med	1220	750
100	A-19	Med	1650	750
13	Quad	GX23-2	860	10,000

Specifications

UL Listing:

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

Socket:

Medium base porcelain with all copper electrical parts and 20" leads, including a ground lead.

Lamps:

Incandescent- (not supplied)
Medium base A-19 lamps, 120V.
4-tier - 100 watt max.
3-tier - 75 watt max.
Fluorescent- (supplied)
13 watt quad tube
NPF 120v ballast

Globes:

Threaded, gasketed globe protects against weather, garden sprinklers and insects. Clear glass GL100 globes standard for 4 Tier. Clear glass GL60 globes standard for 3 Tier. GL100 white globes also available for attractive appearance and glare reduction.

Housing:

Die cast aluminum housing with powder coat finish.

Voltage:

120 volts AC

Patents:

The designs of RAB fixtures are protected under U.S. and international intellectual property laws.

Replacement Parts:

Part	Catalog #
Socket	SLL
Globe for 4 tier -clear	GL100 (clear)
Globe for 4 tier -white	GL100W
Globe for 3 tier - clear	GL60
Globe for 3 tier - white	GL60W

Mounting Stem:

Accessory 12" mounting stem with 1/2" threads on both ends available

Part	Catalog #
12" Stem Verde Green	ST12VG
12" Stem Black	ST12B

Mighty Post Mounting:

See page 110.

Info Online 24/7

Spec Sheets

www.rabweb.com > click "PRODUCTS"

New!

Three Tier DomeTop

Rugged die cast aluminum housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 75 watt max. incandescent, 13 watt fluorescent.

Finish: ● Black
● Verde Green



New!

Four Tier DomeTop

Rugged die cast aluminum housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 75 -100 watt max., 13 watt fluorescent.

Finish: ● Black
● Verde Green





Catalog Numbers

Verde Green	Black
LLD3VG	LLD3B
LLD3VG/F13	LLD3B/F13

Verde Green	Black
LLD4VG	LLD4B
LLD4VG/F13	LLD4B/F13

Dimensions



Mounting Options



Mighty Post
Mighty Post in lengths from 17" - 25" with a sturdy ground stabilizer



Turtle Power Post
19" Mighty Post with Turtle In-Use Cover for outlets & switches