



☐ **ADV-PS-113B-SC**

PROJECT INFORMATION

Type _____

Project _____

Catalog No. _____

Lamp/Voltage _____

E.T. ADJUSTABLE PATH SC or SOLAR AREA AND PATH SERIES (AP)

DESCRIPTION:

Adjustable path light with fully adjustable glare shroud. Adjusts from 9" to 18" in height. Frosted or clear lens is included. Heavy ground stake is included. Available with 3 ft. wire lead (high temp.). Transformer required.

SPECIFICATIONS

CONSTRUCTION:

Constructed of brass. Tool-less design allows for easy removal of shade and re-lamping.

LAMPING:

35W max. (20W T3 included).

ELECTRICAL:

12V luminaire. Transformer required. Electrical connectors supplied by others. Gel filled irrigation wire nuts or grease tubes recommended. Lithium or dielectric grease recommended on all electrical components during installation process. Recommended optimum voltage at fixture: 11.6V. Recommended voltage range: 11.0V - 12.5V.

3 ft., 18 guage lead wire standard. 25 ft., 16 guage lead wire optional. Specify -25 in ordering suffix.

FINISH:

Brass finish is Natural Bronze (NBZ).

OPTICS:

Frosted or clear lens included.

MOUNTING:

In ground installation. Heavy duty ground stake (AX-801P) included.

SOLAR:


Fixture utilizes 2W LED light source, compare to 15W. To specify solar, substitute SS for AP, and eliminate SC.

Example: ADV-SS-113B. Requires Advantage Solar Panel.



CAST BRASS

ADV-PS-113B-T3

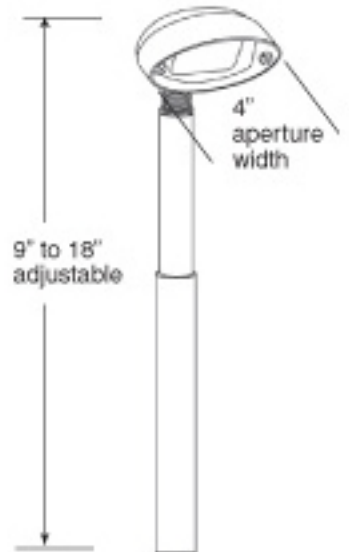

ORDERING INFORMATION:

Catalog No.	Lamp	Material	Finish
ADV-PS-113B-T3	35W SC Max.	Brass	NBZ - Natural Bronze

NOTE: 20W T3 halogen lamp included

