# CL-500

**Product Specification Sheet**

| | |
|---|---|
| **HOUSING:** | Die-cast aluminum. |
| **FINISH:** | Polyester UV powder coated, available in **BK**-Black, **BZ**-Bronze, **GR**-Green, **RT**-Rust, **VG**-Verde Green, **WH**-White. |
| **LENS:** | Clear, tempered, and heat resistant glass with silicone gasket.<br><br>See accessories & parts for special effect lenses, honeycomb louver and frosted glass lens CX-251-FR. |
| **LAMP TYPE:** | 12V, MR-16 halogen, 35W max.<br><br>See lamp guide for LED and color MR-16 lamps. |
| **MOUNTING:** | Adjustable cast aluminum knuckle with 1/2" NPT, including ground spike. Wire connector excluded.<br><br>See accessories & parts for optional mounting hardware. |
| **WIRING:** | Fixture is prewired with a 3-foot pigtail of direct burial cable. |

**CL-500-BK**

UL LISTED

LED AVAILABLE




**CX-839**
**CORONA UNIVERSAL CONNECTOR AVAILABLE**

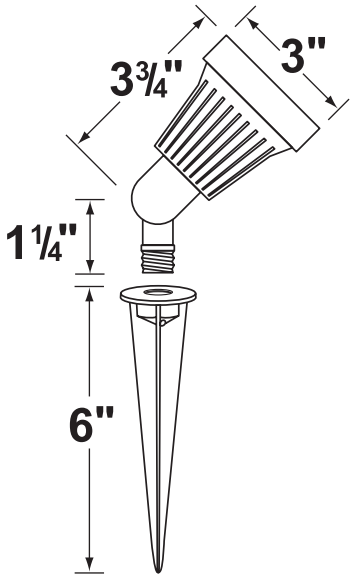



CORONA Lighting
WWW.CORONALIGHTING.COM
Tel: 800-727-9262
213-747-4500
Fax: 800-727-9957
213-747-3234


- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.