


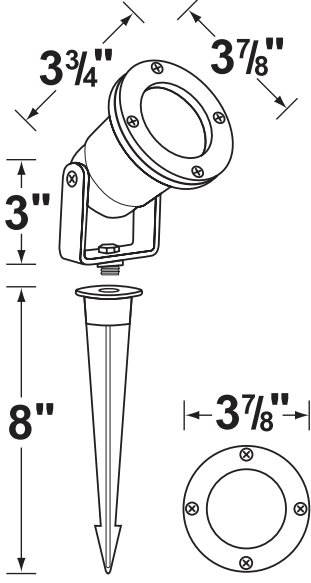



<b>CL-511-SS</b>		 <p style="text-align: center;"><b>CL-511-SS</b></p>	 <p style="text-align: center;"><b>LED AVAILABLE</b></p>  <p style="text-align: center;"><b>CX-854 DIRECT BURIAL WIRENUT AVAILABLE</b></p>
<b>Product Specification Sheet</b>			
<b>HOUSING:</b>	Solid stainless steel.		
<b>FINISH:</b>	<b>SS</b> -Stainless Steel.		
<b>LENS:</b>	Clear, tempered, and heat resistant glass with silicone gasket.  See accessories & parts for special effect lenses, honeycomb louver and frosted lens CX-380-FR.		
<b>LAMP TYPE:</b>	12V, MR-16 halogen, 35W max.  See lamp guide for LED and color MR-16 lamps.		
<b>MOUNTING:</b>	Stainless steel yoke with 1/2" NPT male bushing mounted on stainless steel ground spike. Wire connector excluded.  See accessories & parts for optional mounting hardware.		 <p style="text-align: center;"><b>Tel: 800-727-9262 213-747-4500</b></p> <p style="text-align: center;"><b>Fax: 800-727-9957 213-747-3234</b></p>
<b>WIRING:</b>	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.