



STEP LIGHTS SL-02-SERIES

SPECIFICATIONS

FACE PLATE: Heavy-duty stamped brass (-BRS), copper (-COP), stainless steel (-SS), or aluminum

BACK BOX HOUSING: White powder coated galvanized steel

GASKET: Black neosponge 0.190" thick closed cell

LENS (-AL models): White high-impact acrylic

SOCKET: Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires

LAMP LIFE: 1200 hours average rating for S-8 #1141

WIRING: Black 3 foot 18/2 zip cord

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

FINISH: Optional finishes available




We recommend the Xenon or Halogen 10,000 hour bulb.




SL-02-BRS

ORDERING INFORMATION

CATALOG NO.	FACE PLATE ONLY	DESCRIPTION	STANDARD FINISH	EST. SHIP. WEIGHT
SL-02	FA-50	Stamped aluminum 4 louver step light	Black texture	1.0 lbs.
SL-02-BRS	FA-50-BRS	Stamped brass 4 louver step light	Brushed brass	2.0 lbs.
SL-02-COP	FA-50-COP	Stamped copper 4 louver step light	Brushed copper	2.0 lbs.
SL-02-SS	FA-50-SS	Stamped stainless steel 3 louver step light	Brushed stainless	2.0 lbs.
SL-02-3L	FA-50-3L	Stamped aluminum 3 louver step light	Black texture	2.0 lbs.
SL-02-3L-BRS	FA-50-3L-BRS	Stamped brass 3 louver step light	Brushed brass	2.0 lbs.
SL-02-3L-COP	FA-50-3L-COP	Stamped copper 3 louver step light	Brushed copper	2.0 lbs.
SL-02-3L-SS	FA-50-3L-SS	Stamped stainless steel 3 louver step light	Brushed stainless	2.0 lbs.
SL-02-AL	FA-51	Stamped aluminum lensed step light	Black texture	1.0 lbs.
SL-02-AL-BRS	FA-51-BRS	Stamped brass lensed step light	Brushed brass	1.0 lbs.
SL-02-AL-COP	FA-51-COP	Stamped copper lensed step light	Brushed copper	1.0 lbs.
SL-02-AL-SS	FA-51-SS	Stamped stainless steel lensed step light	Brushed stainless	1.0 lbs.
SL-02-VERT	FA-80	Stamped aluminum 4 louver vertical step light	Black texture	1.0 lbs.
SL-02-VERT-BRS	FA-80-BRS	Stamped brass 4 louver vertical step light	Brushed brass	1.0 lbs.
SL-02-VERT-COP	FA-80-COP	Stamped copper 4 louver vertical step light	Brushed copper	1.0 lbs.
SL-02-VERT-SS	FA-80-SS	Stamped stainless steel 3 louver vertical step light	Brushed stainless	1.0 lbs.

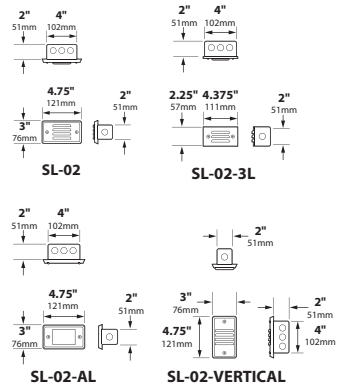

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

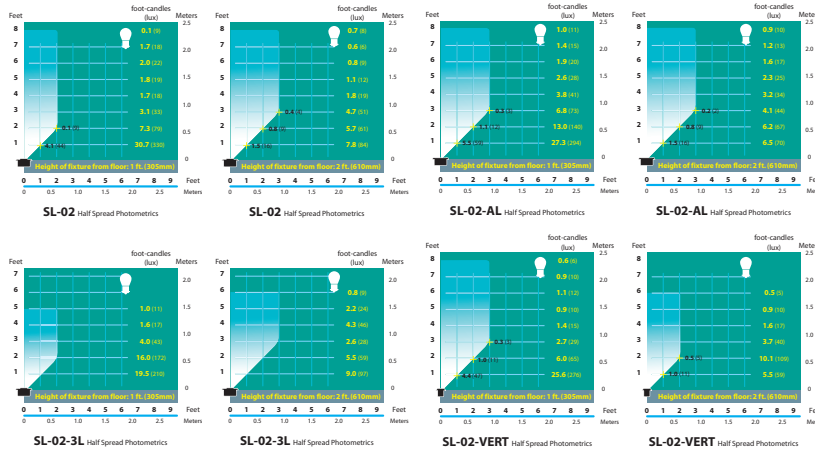

BACK BOXES ONLY

ACCESSORIES

CATALOG NO.	DESCRIPTION
FA-56	Stamped galvanized box with lamp and socket
FA-56-H	Stamped galvanized box with lamp and socket
FA-56-X	Stamped galvanized box with lamp and socket
FA-56-T7	Stamped galvanized box with lamp and socket
FA-56-T8	Stamped galvanized box with lamp and socket

LAMP AND WATTAGE

18w SC (12v.)
20w halogen SC (12v.)
20w xenon SC (12v.)
15w T7 DC (120v.)
25w T8 DC (120v.)



JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630
 www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTIONS
FOR SL-02, SL-04, SL-08, SL-17, SL-30 & SL-31
STEP AND BRICK LIGHT FIXTURES

Inspected by

1. Make sure light bulbs do not make contact with front lens plate.
2. Push back reflector, socket and lamp assembly from front lens as far back into housing.
3. If light bulbs are making contact with lens or are extremely close to it, lens will deform or melt.
4. All 12v models include one 3' 18/2 wire. 120v models only include socket wires and a ground wire.

NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350