



STEP LIGHTS SL-08-SERIES

SPECIFICATIONS

FACE PLATE: Cast brass (-BRS) or cast aluminum

BACK BOX HOUSING: White powder coated cast aluminum
-BRS models have unfinished brass housing

GASKET: Black neosponge 0.190" thick closed cell

LENS: Clear high impact acrylic (AL models-white high-impact acrylic)

REFLECTOR: Highly polished specular aluminum

LAMP (incandescent models): 2 x 18 watt, S-8 #1141 (50 watt max.)

(T10 models): None supplied; rated for 40 watt T10

(FL models): 5, 7, 9 compact fluorescent, 41°K

SOCKET (incandescent models): Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires
(T10 models): High temperature ceramic medium base with 250° C silicone lead wires

(FL models): G23 bi-pin for 5 or 7 watt or GX23 bi-pin for 13 watt, with type-1 outdoor magnetic clamped core ballast

LAMP LIFE: 1200 hours average rating for S-8 #1141, 10,000 hour for compact fluorescent

WIRING: Black 3 foot 18/2 zip cord for 12v., 120v.: standard black, white and ground, 18 gauge

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

FINISH: Optional finishes available

NOTE: Specify 1/2" end holes for end feed through at the time of order.



We recommend the Xenon or Halogen 10,000 hour bulb.



SL-08-BRS



ORDERING INFORMATION

CATALOG NO.	FACE PLATE ONLY	DESCRIPTION	STANDARD FINISH	EST. SHIP. WEIGHT
SL-08	FA-54	Cast aluminum 3 louver brick light, clear acrylic lens	Black texture	3.0 lbs.
SL-08-BRS	FA-54-BRS	Cast brass 3 louver brick light, clear acrylic lens	Solid brass	7.0 lbs.
SL-08-AL	FA-55	Cast aluminum white acrylic lensed brick light	Black texture	3.0 lbs.
SL-08-AL-BRS	FA-55-BRS	Cast brass white acrylic lensed brick light	Solid brass	6.0 lbs.
	FA-54-120V	Cast alum. 3 louver brick light, 120v., clear glass lens	Black texture	
	FA-54-120V-BRS	Cast brass 3 louver brick light, 120v., clear glass lens	Solid brass	
	FA-55-120V	Cast aluminum white acrylic glass lensed brick light, 120v.	Black texture	
	FA-55-120V-BRS	Cast brass white acrylic glass lensed brick light, 120v.	Solid brass	

120 VOLT COMPACT FLUORESCENT


Fluorescent fixtures have 5, 7 or 9 watt compact fluorescent lamps, 9 watt maximum. Specify wattage.

SL-08-FL-5, 7, 9	Cast aluminum 3 louver brick light, clear acrylic lens	Black texture	3.0 lbs.
SL-08-FL-5, 7, 9-BRS	Cast brass 3 louver brick light, clear acrylic lens	Solid brass	7.0 lbs.
SL-08-AL-FL-5, 7, 9	Cast aluminum lensed brick light, white acrylic lens	Black texture	7.0 lbs.
SL-08-AL-FL-5, 7, 9-BRS	Cast brass lensed brick light, clear white acrylic lens	Solid brass	7.0 lbs.


120 VOLT T10

The following fixtures are ready for 20-40 watt T10 bulbs, supplied without lamps.

SL-08-T10-NL	Cast aluminum 3 louver brick light, clear glass lens	Black texture	3.0 lbs.
SL-08-T10-NL-BRS	Cast brass 3 louver brick light, clear glass lens	Solid brass	7.0 lbs.
SL-08-AL-T10-NL	Cast aluminum lensed brick light, white glass lens	Black texture	3.0 lbs.
SL-08-AL-T10-NL-BRS	Cast brass lensed brick light, white glass lens	Solid brass	7.0 lbs.



SL-08



SL-08-AL

ACCESSORIES

CATALOG NO.	DESCRIPTION	LAMP AND VOLTAGE
-------------	-------------	------------------

BACK BOXES ONLY

FA-60	Cast aluminum box with lamp and socket	2 x 18w single contact (12v.)
FA-60-H	Cast aluminum box with lamp and socket	2 x 20w halogen (12v.)
FA-60-FL	Cast aluminum box with lamp and socket	5, 7, 9 watt comp. fluor. (specify) (120v.)
FA-60-MR16	Cast aluminum box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-X	Cast aluminum box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-T7	Cast aluminum box with lamp and socket	2 x 15w T7 (120v.)
FA-60-T8	Cast aluminum box with lamp and socket	2 x 25w T8 (120v.)
FA-60-T10-NL	Cast aluminum box with medium base socket	(T10, 120v. option)
FA-60-BRS	Cast brass box with lamp and socket	2 x 18w SC (12v.)
FA-60-BRS-H	Cast brass box with lamp and socket	2 x 20w halogen (12v.)
FA-60-BRS-FL	Cast brass box with lamp and socket	5, 7, 9 watt comp. fluor. (specify) (120v.)
FA-60-BRS-MR16	Cast brass box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-BRS-X	Cast brass box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-BRS-T7	Cast brass box with lamp and socket	2 x 15w T7 (120v.)
FA-60-BRS-T8	Cast brass box with lamp and socket	2 x 25w T8 (120v.)
FA-60-BRS-T10-NL	Cast brass box with medium base socket	(T10, 120v. option)

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.

For use with Focus CPC or hub supplied by others.

FSA-00

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	


FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390


Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC




LIGHT DISTRIBUTIONS AND PHOTOMETRICS

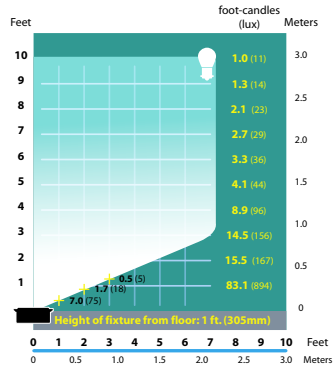


SL-08 Half Spread Photometrics

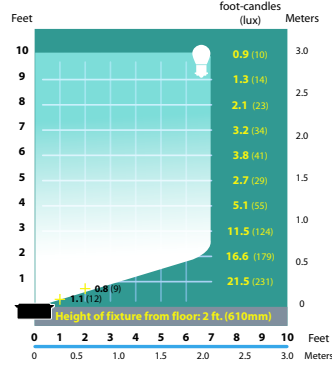


SL-08 Half Spread Photometrics

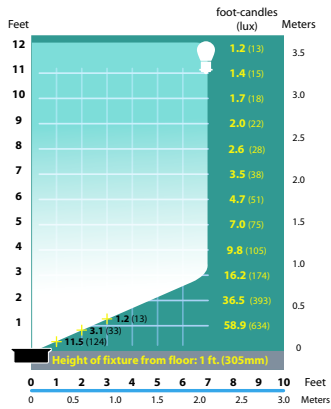


SL-08-AL Half Spread Photometrics

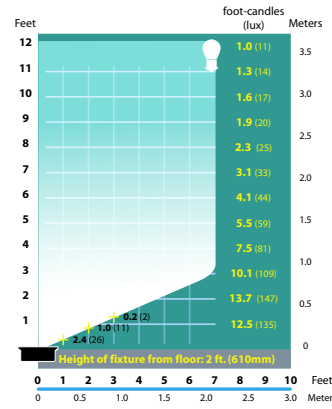

SL-08-AL Half Spread Photometrics

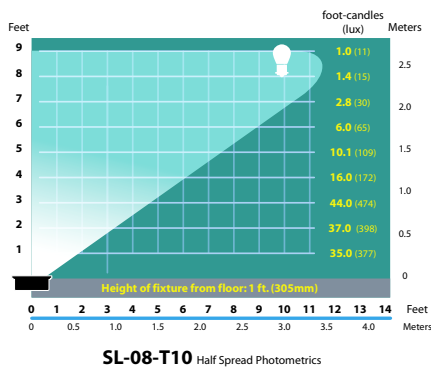


SL-08-T10 Half Spread Photometrics

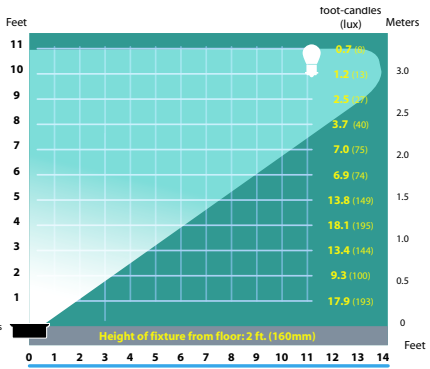


SL-08-T10 Half Spread Photometrics




LIGHT DISTRIBUTIONS AND PHOTOMETRICS

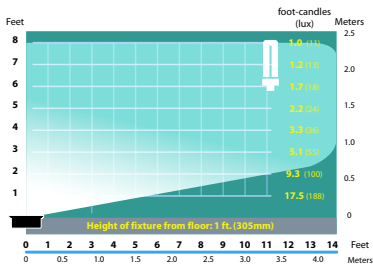


SL-08-AL-FL-5 Half Spread Photometrics (5w)

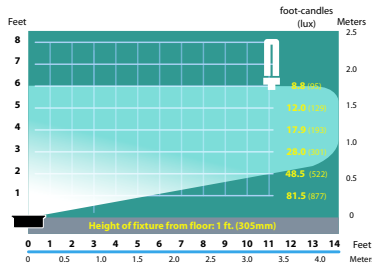


SL-08-AL-FL-7 Half Spread Photometrics (7w)

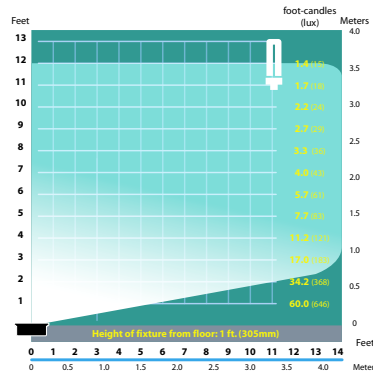


SL-08-AL-FL-9 Half Spread Photometrics (9w)

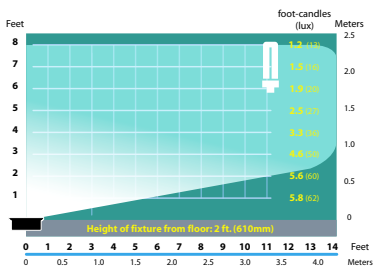


SL-08-AL-FL-5 Half Spread Photometrics (5w)

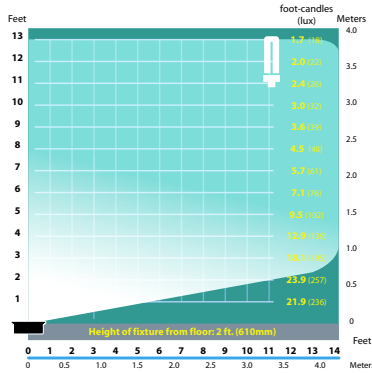


SL-08-AL-FL-7 Half Spread Photometrics (7w)

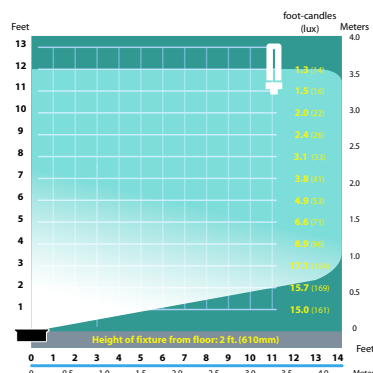


SL-08-AL-FL-9 Half Spread Photometrics (9w)

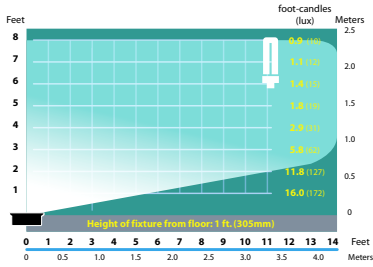


SL-08-FL-5 Half Spread Photometrics (5w)

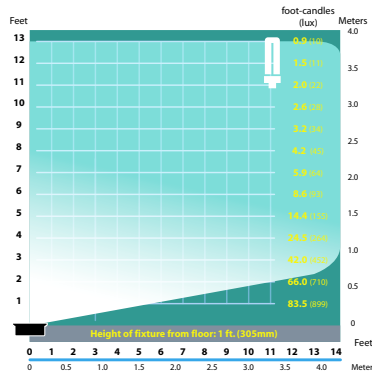


SL-08-FL-7 Half Spread Photometrics (7w)

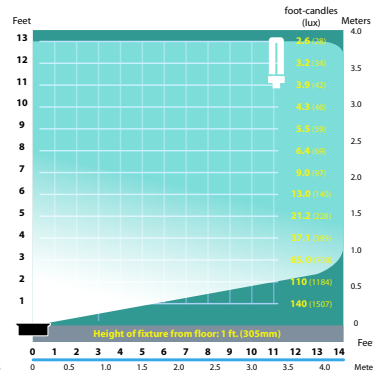


SL-08-FL-9 Half Spread Photometrics (9w)

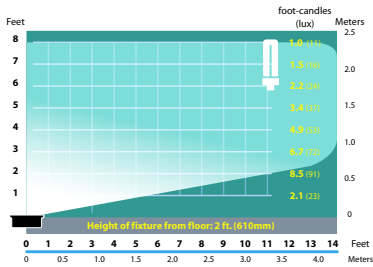

SL-08-FL-5 Half Spread Photometrics (5w)

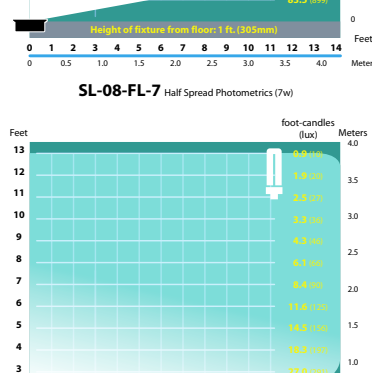

SL-08-FL-7 Half Spread Photometrics (7w)

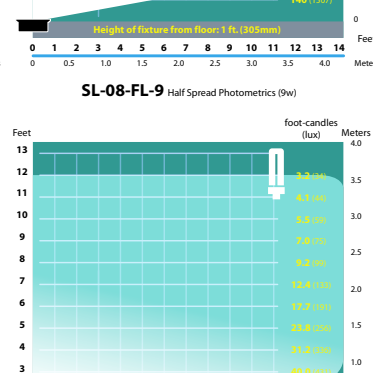

SL-08-FL-9 Half Spread Photometrics (9w)



FOCUS™
INDUSTRIES

INSTALLATION INSTRUCTONS
FOR SL-02, SL-04, SL-08, SL-17, SL-30 & SL-31
STEP AND BRICK LIGHT FIXTURES

Inspected by

1. Make sure light bulbs do not make contact with front lens plate.
2. Push back reflector, socket and lamp assembly from front lens as far back into housing.
3. If light bulbs are making contact with lens or are extremely close to it, lens will deform or melt.
4. All 12v models include one 3' 18/2 wire. 120v models only include socket wires and a ground wire.

NOTE: Must be installed by a licensed electrician per local codes
For Questions Call 1-888-882-1350