



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# 5" VERTICAL IC COMPACT FLUORESCENT REMODEL HOUSING

26W COMPACT FLUORESCENT LAMP

## ICPL526RE ICPL526REN

### PRODUCT DESCRIPTION

ICPL Energy Star, Air-Loc® sealed remodel housing • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and air cooling costs • Trims shown with Air-Loc symbol **Air-Loc** do not require a gasket • 2 year warranty.

### PRODUCT SPECIFICATIONS

**Lamp** One 26W Triple Tube (4-pin) CFL lamp.

**Socket** Supplied with spring to accommodate certain trim installations, or can be attached to top of housing for certain trims.

**Ballast** 120V HPF or NPF Rapid Start Electronic with end-of-life lamp protection • Optional dimming ballast available (Title 24 compliant, Energy Star qualified). • UL listed/CSA certified.

**Trims** Trim selection shown on reverse.

**Labels** Energy Star qualified • Meets Washington State Air Tight Requirements, IECC • Complies with FCC Part 18 consumer use limits • Product mechanically protected against improper use of lamps • Union made • UL and C-UL Listed • Complies with California's Title 24 energy code • Trims 210, 2130 and 5101 are wet location approved for covered ceiling applications.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

### INSTALLATION

**Junction Box** Pre-wired junction box UL • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.



**Housing** .032" aluminum housing sealed for Air-Loc • Remodel springs accommodate up to 1 ½" ceiling thickness.

### PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)	Ballast
ICPL526RE	120V	26W Triple Tube (4-pin) CFL	HPF
ICPL526REN	120V	26W Triple Tube (4-pin) CFL	NPF



### DIMENSIONS

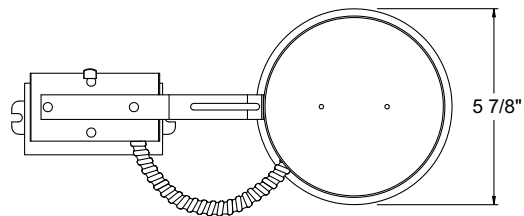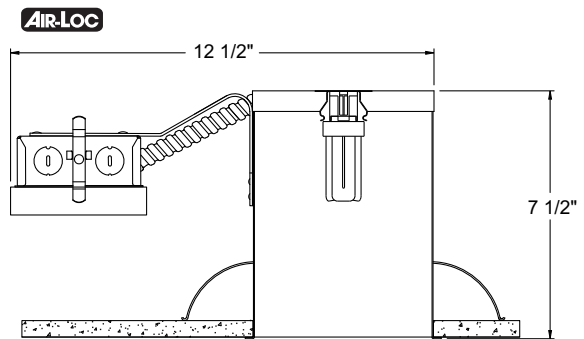

5 1/2" CEILING CUTOUT

### ACCESSORIES

Catalog No.	Description
ALG5R	Air-Loc Gasket

To order, specify catalog number.

### OPTIONS

(Add as suffix to housing)

Suffix No.	Description
-DB120	120V NPF Dimming Ballast (for use with ICPL526REN only)

Note: This product is Energy Star qualified and Title 24 compliant.








Ordering Example: ICPL526REN-**DB120**

# 5" VERTICAL IC COMPACT FLUORESCENT REMODEL HOUSING

## 26W COMPACT FLUORESCENT LAMP

### ICPL526RE ICPL526REN

#### TRIMS/LAMPS

	Cat. No.	Description	Lamp Rating
<b>AIR-LOC</b> 	<b>210-WH</b> ◆	Lensed Shower/Closet Light	26W Triple Tube (4-pin) CFL
	<b>210-SC</b> ◆	Lensed Shower/Closet Light	
	<b>210-ABZ</b> ◆	Lensed Shower/Closet Light	
	<b>215W-WH</b>	White Baffle, White Trim	26W Triple Tube (4-pin) CFL
	<b>215B-WH</b>	Black Baffle, White Trim	
	<b>216C-WH</b>	Cone - Clear Alzak®	26W Triple Tube (4-pin) CFL
	<b>216G-WH</b>	Cone - Gold Alzak®	
	<b>216W-WH</b>	Cone - Gloss White	
	<b>216HZ-WH</b>	Cone - Haze	
	<b>216WHZ-WH</b>	Cone - Wheat Haze	
	<b>218W-WH</b>	White Baffle, White Trim	26W Triple Tube (4-pin) CFL
	<b>218B-WH</b>	Black Baffle, White Trim	
	<b>219C-WH</b>	Cone - Clear Low Iridescent Alzak®	26W Triple Tube (4-pin) CFL
	<b>219HZ-SC</b>	Cone - Haze	
	<b>219HZ-WH</b>	Cone - Haze	
	<b>219WHZ-ABZ</b>	Cone - Wheat Haze	
	<b>219WHZ-WH</b>	Cone - Wheat Haze	
<b>AIR-LOC</b> 	<b>2130W-WH</b> ◆	White Baffle Regressed Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
	<b>2130B-WH</b> ◆	Black Baffle Regressed Frosted Dome Lens with Reflector	
<b>AIR-LOC</b> 	<b>5101-ABZ</b> ◆	Beveled Frame - Frosted Dome Lens with Reflector	26W Triple Tube (4-pin) CFL
	<b>5101-SC</b> ◆	Beveled Frame - Frosted Dome Lens with Reflector	
	<b>5101-WH</b> ◆	Beveled Frame - Frosted Dome Lens with Reflector	

Trim Size: 6¼" O.D., 5101 is 6½" O.D.

Trim Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

**AIR-LOC** JUNO IC housings meet IECC Energy Code requirements per ASTM E283.  
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925  
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064  
Visit us at [www.junolightinggroup.com](http://www.junolightinggroup.com)

Printed in U.S.A. ©2008 Juno Lighting, LLC.