

# SPECIFICATION SHEET

## PRODUCT # : CL-226-SS

• Well Lights

• 316 Marine Grade Stainless Steel

### Fixture Specifications:

**Housing:** Solid Stainless Steel.

**Finish :** **SS- Stainless Steel**, Faceplate process. Also available in **AB** finish.

**Lens:** Clear, tempered and heat resistant convex glass. Extra flat lens included.

**Socket:** Top grade ceramic bi-pin socket with retention clip.

**Lamp:** 12V, MR-16 halogen 35W max. L-BAB-C20 (20w) standard. LED lamps are also available. See lamp guide, below for more information.


**Gasket:** Silicone "0" ring seals faceplate to housing providing weather tight protection.

**Wiring:** Fixture is prewired with a 3-ft 18-2 SJT-W direct burial cord. Wire connector available separately. Silicone filled wire nut (**CX-854**) may be ordered to Corona Lighting.

**Mounting:** In-ground direct burial or concrete encasement.

**Electrical Notes:** A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED lamps are 9V-17V.

**Warranty:** Limited lifetime warranty on stainless steel fixture against manufacturer's defects.

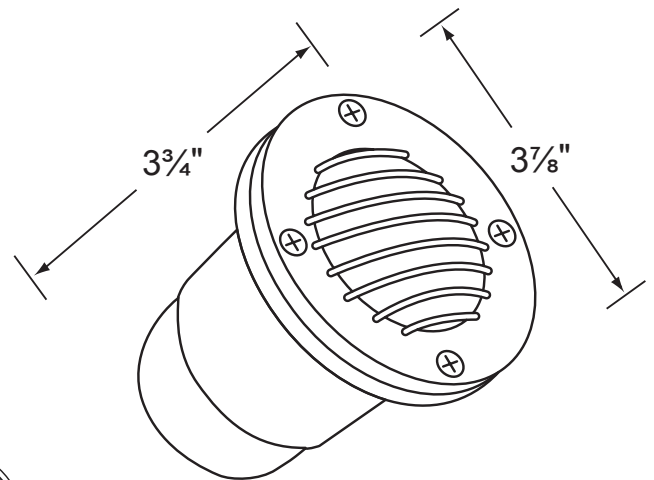

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER       | WATTS | BEAM           |       | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------------|-------|----------------|-------|---------------|-------------|--------------------|
|                   |       | SPREAD         | LUMEN |               |             |                    |
| L-ED16-COB5W-SP   | 5     | 15° Spot       | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL   | 5     | 38° Flood      | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF   | 5     | 60° Wide Flood | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-SP3K | 5     | 15° Spot       | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL3K | 5     | 38° Flood      | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF3K | 5     | 60° Wide Flood | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-3W-SP      | 3.5   | 15° Spot       | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-FL      | 3.5   | 45° Flood      | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-WF      | 3.5   | 60° Wide Flood | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-5W-SP      | 5     | 15° Spot       | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-FL      | 5     | 45° Flood      | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-WF      | 5     | 60° Wide Flood | 350   | 2700K         | 50,000      | 40 Watt            |

For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - **product #** - **lamp** - **wattage** - **lamp angle**

CL - 226-SS - L-ED16 - 5W - FL

Example: CL-226-SS-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.