

3" Ultra Slim LED Gimbal Lights (600 lm)

For use with direct contact to insulation




Features

- For indoor use only
- 8W
- CRI 90+
- 120V
- ETL Listed
- ENERGY STAR compliant
- Dimmable Triac/ELV

Specifications

Wattage	8W
Lumens	600 lm - 620 lm
Voltage	120V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K - 4000K
Dimmable	Triac/ELV
Lamp Type	LED
CRI	90+
Damp Location	Listed

Options

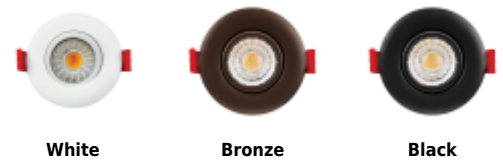

White

Bronze

Black

Technical Details

Optics: Polycarbonate lens diffuses light evenly throughout space with no LED pixelation.

Construction: IC rated driver and fixture are tested and approved for direct contact with insulation. Aluminum die-cast trim with durable powdercoat finish preventing rust and paint cracking. Plenum rated cable connector to connect from module to remote driver box. Isolated driver integrated inside aluminum remote box with two 7/8" knockouts with slots for pryout.

Installation: Designed for super shallow ceiling plenums without any housing. High strength steel spring clip for easy installation. Hole cut out template provided for accurate hole size for proper trim installation.


Electrical: Included driver connects directly to 120V power supply. Standard input wattage is 9W, 55 lumens per watt. Replaces 50W incandescent.

Dimmability: Works with 120V Triac and ELV type dimmers. Dims down to 10%. For full list of dimmers, refer to the ELM System Dimmer Compatability List.

Listings: ETL Listed for DAMP Locations. ENERGY STAR® Certified. IC-Rated for direct contact with insulation. Air Tight certified in accordance with ASTM E283-2004. California Title 24 Compliant (JA8-2016-E)

Warranty: 5-year limited warranty.

Dimensions



Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
ERT31830W	LED	600 lm	3000K	8W	120V	Triac/ELV	White
ERT31840W	LED	620 lm	4000K	8W	120V	Triac/ELV	White
ERT318CT5W	LED	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	8W	120V	Triac/ELV	White
ERT318CT5BZ	LED	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	8W	120V	Triac/ELV	Bronze
ERT318CT5B	LED	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	8W	120V	Triac/ELV	Black

Product Number Builder Example: ERT31830W

High Lumen Round Panel Light	Color Temp	Finish
ERT318		
	30 3000K	W White
	40 4000K	BZ Bronze
	CT5 2700K - 5000K	B Black


Product Custom Image

Compatible Products

For use with 3" Elm™ System Downlights



3" Elm™ New Construction Frames



Universal Frame for 3" Gimbal Lights
New Construction

CAT NO.	SPECIFICATIONS
E246LF1	For 3" Gimbal Lights