

4 by 1 HDMI Switcher with ARC

Part Number: HDTVHDS941A



Operation Manual

support@hdtvsupply.com or 800-841-9238

1. Introduction

This is a high performance HDMI Switcher with four HDMI inputs & one output HDMI Switcher, the HDMI Switcher provides an S/PDIF link and earphone to output the HDMI source audio. the S/PDIF link support Audio Return Channel (ARC) from a compatible ARC TV following the HDMI v1.4 specification.

2. Feature

- Ø Supports multiplexed HDMI 4-input and 1-output
- Ø The output port supporting Audio Return Channel (ARC)
- Ø HDMI v1.4 supports:- 4Kx2K@30Hz-Audio Return Channel (ARC)- 3D
- Ø Deep Color support 36/30/24-bit
- Ø Audio EDID select function.


- Ø Supports CEC bypass on HDMI out
- Ø Support digital audio format ,DTS-HD/Dolby-True HD/LPCM7.1/AC3/DTS/DSD
- Ø Super wideband IR control system, IR transport channel can be forward or backward.

3. Package Contents

Ø	HDMI Swithcer	1pcs
Ø	5V/1A DC power adaptor	1pcs
Ø	Remote Control	1pcs
Ø	Operation Manual	1pcs
Ø	38KHz IR Receiver	1pcs

4. Specification

Video Bandwidth	300MHz/10.2 Gbps
Input Ports	4 × HDMI (Female type)
Output Ports	1 × HDMI (Female type)
Output Resolution	480i ~1080p50/60, 4Kx2K@24/30, VGA~UXGA
HDMI Cable In	1080p/12bits (15m)
HDMI Cable Out	1080p/12bits (15m)
ESD Protection	Human Body model: ±8 kV (air-gap discharge) ±4 kV (contact discharge)
Power Supply	5 V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	82 mm (W) × 190 mm (D) × 26 mm (H)
Weight	430 g
Chassis Material	Metal

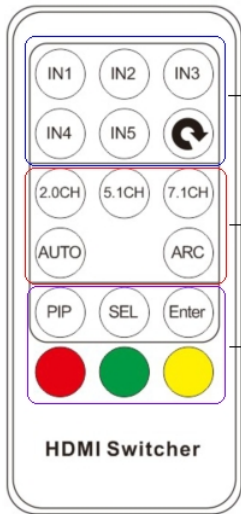

Silkscreen Color

Black

Operating Temperature

0 °C~40 °C/ 32 °F~104 °F

Storage Temperature

-20 °C ~

60 °C/-4 °F ~140 °F

Relative Humidity 20~90 % RH

(non-condensing)

Power Consumption

1.5 W

5. Remote Control

1. Input source select button, the panel LED will indicate the input source status .

2. Audio EDID select button, the panel LED will

indicate the select EDID status.

2.0CH: the switcher will modify the HDMI audio

part EDID for support 2.0CH to source.

5.1CH: the switcher will modify the HDMI audio

part EDID for support 5.1CH to source.

7.1CH: the switcher will modify the HDMI audio part EDID for support 7.1CH to source.

AUTO: the switcher will copy the sink EDID to source.

ARC: open/close the ARC function.

3. No function

6. Connect and Operate

Connect the signal sources such as Blu-Ray Player, Play Station 3, audio/video receiver, satellite receivers and computers equipped with HDMI output interfaces with a short high-speed HDMI cable to the HDMI Switcher inputs.

Connect the HDMI output from the HDMI Switcher to a high-definition display device such as HD-LCD, HD-DLP and HD projectors with HDMI input interfaces. Use high-speed HDMI cables that are recommended for the distances that are required for each connection.

The Switcher is powered by an external power supply which is included. Connect power first to the source, then to the Switcher and then to HD TV or projector.

The input source can be controlled from the display. This is accomplished by using an optional IR Receiver pigtail pointing away from the display(s), which can be connected with the optional HDMI IR Adapter , and inserted between the HDMI cable connector and the display with the toggle switcher at the “IR” position. The IR Transmitter pigtail is then connected to the switcher

and pointed to the source(s). The switcher also have the capability of being controlled via Remote control.




1. ON/OFF: Power on/off switch.
2. POWER LED: This red LED illuminate when the device is connected with power supply.
3. IN1,2,3,4 LED: These red LED illuminate when the output select to the corresponding input.
4. OUT LED: This red LED illuminate when the HDMI output plug to HDTV.
5. 2.0,5.1,7.1 LED: These red LED illuminate when the audio EDID select to corresponding

audio.

6. ARC LED: This red LED illuminate when the ARC function open.
7. IR : Remote control receiver ,the 3.5mm phone for HDMI switcher IR extend.
8. INPUT BUTTON: Press this button to select the input source.
9. EDID BUTTON: Press this button to select the 2.0CH,5.1CH,7.1CH,Auto audio EDID mode.
10. ARC BUTTON: Press this button to open or close the ARC function.

ARC function : If you need use ARC,your HDTV must support this function, When you open the ARC function,the Toslink of the Switcher will output the HDTV current display content audio. Otherwise will output the Switcher input source audio.

11. RST BUTTON: Press this button the switcher will reset to factory state(INPUT1, Auto EDID MODE,ARC FUNCTION CLOSED)



1. Input Source: These slot is where you connect the HDMI or Display Port source output from DVD, PS3,Set-top Box and Note Book.
2. OUTPUT: This slot is where you connect the HDTV or monitor with HDMI cable for input source display.
3. Toslink OUT: This slot is where you connect to the amplifier with optical fiber cable.
4. Stereo OUT: This slot is where you connect to the speaker with 3.5mm earphone cable.
The audio support LPCM only,When HDMI input is compress audio format(Dolby,DTS,DTS-HD,etc),the stereo audio out will mute.
5. DC 5V: Plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet.

7. Connection Diagram

