



AV Connectivity, Distribution And Beyond...

**VIDEO WALLS VIDEO PROCESSORS
VIDEO MATRIX SWITCHES
EXTENDERS SPLITTERS WIRELESS
CABLES & ACCESSORIES**

DVI-SPLITPRO-4X

Advanced Quad Screen Multiviewer
with IR Remote Control

ADVANCED VIDEO PROCESSOR



KEY FEATURES

- Support six most popular video formats: four VGA, four DVI/ HDMI, four component, four S-Video and four composite inputs
- Input resolution support from 640x480 to 1920x1200, interlaced or progressive.
- DVI & HDMI
- Support HDCP 1.1
- Dual outputs (DVI / VGA), 640x480 to 1920x1200
- Video background available
- Adjustable size & position through software
- Dynamic transition for video sizing and positioning
- Titles, borders and colored backgrounds
- Resize, position, zoom & pan and blend output video
- Several Image parameters and layouts can be saved in computers and can be loaded for later use
- Video parameters adjustable (brightness, contrast, color temperature, etc.)
- Use as a Video Splitter, a Video Converter and a Video Switcher
- Firmware upgradable for support of new features and technology enhancements
- Control through RS-232/RS-485 over Cat-5 and IR Remote Control
- Can be cascaded to obtain more images using RS-485 control path

DVI-SPLITPRO-4X

LAYOUT 1

MONITOR/TV
Preset layout 1

- CABLE INDEX**
- Output
 - Input / Source
 - RS-232





Preset Layout 2



Preset Layout 3



Preset Layout 4

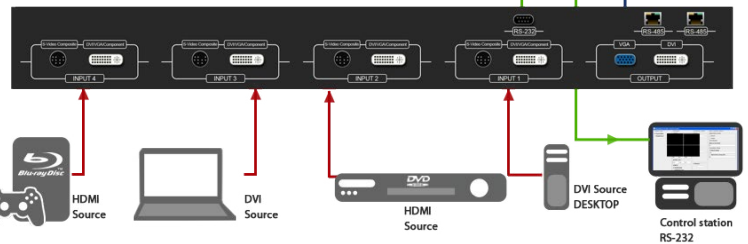

PANEL DESCRIPTION



- | | |
|---------------------------------|--------------------------|
| 1 Power Switch | 2 Power Supply |
| 3 Serial Control (RS232) | 4 Mode Setting |
| 5 RS484 (Cascade) | 6 Mode Setting |
| 7 VGA Input | 8 DVI/HDMI Output |



ITEM

SPECIFICATION

Dual Output Support	Yes (DVI & VGA)
Background Video Input	Yes
Supported Resolutions	480i / 480p / 720p / 1080i / 1080p (60) / 1920x1200@75 / 1600x1200@60
Audio Support	No
Embedded Video Mixer	Yes
Ability To Cascade	Yes
Input	4 x VGA (through included DVI to VGA Adapter), 4 x DVI, 4 x HDMI (through HDMI to DVI Cable / Adapter, not supplied), 4 x Component (through included adapter), 4 x Composite (through included cable), 4 x S-Video (through included cable), 1 x RS232, 1 x RS485
Output	1 x DVI (Also supports HDMI signal by DVI to HDMI Cable), 1 x VGA
Dimensions	11.8" x 15.3" x 1.7" (L x W x H)
Size	1U Rack-mount with ears
Power Supply	AC 100-240V
Power Consumption	35 Watts (max)