


Specifications for Simplex Fiber Optic Cables

OM2 and OM3 multi-mode fiber with SC or ST terminations

The Hall Research Simplex Cables are composed of a tight buffer, aramid yarn, and a PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.

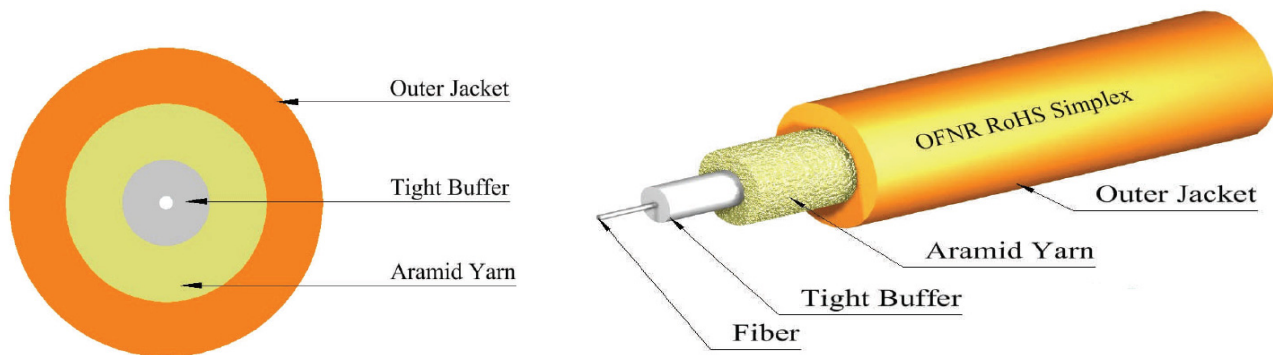

Application: Riser Flame Rating: UL1666

Type:

- 50/125 um Multimode Fiber
- Nominal OD: 2 mm
- Jacket Material: PVC (orange)
- Weight 11 pounds/km
- Min Bend Radius: 8 mm

Attenuation:

- 850/1300 nm @ 3.5/1.5 dB/km

Operating Temperature

- -20°C to +70°C