

TECHNICAL SPECIFICATIONS

TRANSMITTER	
Upstream Port	USB Type A Male
Downstream Port	RJ-45 Jack
Power	Bus-Powered

RECEIVER	
Upstream Port	USB Type A Female
Downstream Port	RJ-45 Jack
Power	5VDC-2A

OTHER	
Built-in Cable Length	1 ft.
Interconnect Cable	Standard CAT5/5e/6 Cable
Max Cable Length	150 ft.
Operating Temperature	0-185 °F (0-85 °C)

WHAT'S IN THE BOX?

PART NO.	DESCRIPTION
USB-NAN-S	USB CAT5 Extender Link. Includes: [USB-TXNAN, USB-RXNAN, & (CCUSBAB06) & PS5VD2A]

Notice

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from SmartAVI.



Designed and Manufactured in the USA


800.AVI.2131

**Tel: (818) 503-6200 Fax: (818) 503-6208
11651 Vanowen St. North Hollywood, CA 91605**

SmartAVI.com

Smart-AVI
SMART AUDIO VIDEO INNOVATION

USB2Nano

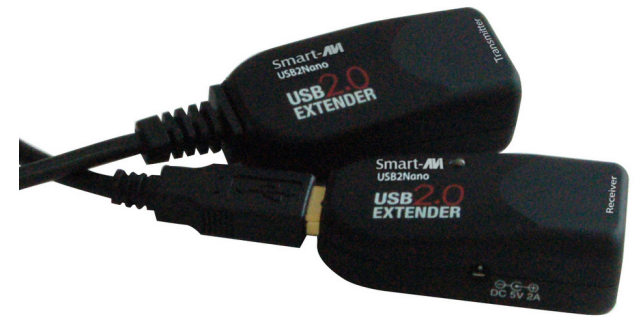

**Low-Cost High-Performance USB 2.0
Extender Over CAT5e**

**Extend the transmission distance between a USB
device and its host computer up to 150 feet**

USER MANUAL


INTRODUCTION

SmartAVI's USB2Nano extends standard USB (Universal Serial Bus) 2.0 signals up to 150 feet using a single CAT5 cable. The USB2Nano supports all USB 2.0 high-speed devices, from keyboards to printers, and will operate on Windows®, Mac and Linux® operating systems. Additional USB hubs can be added, increasing the amount of devices

FEATURES

- Supports USB 2.0 and USB 1.1 Devices Transparently (Flash Drives, Printers, etc.)
- Supports USB 1.1 Keyboard and Mouse
- Works on Windows, Mac, and Linux Operating Systems
- Bus-powered Local Unit
- Power Adapter for Remote Unit
- Extends USB device connectivity up to 150 feet
- Supports Suspend/Resume Detection
- Supports Hot Plug Functionality
- Low cost compared to hub-based extension or other USB extender
- No software driver required
- Plug-and-Play Ready

APPLICATION DIAGRAM

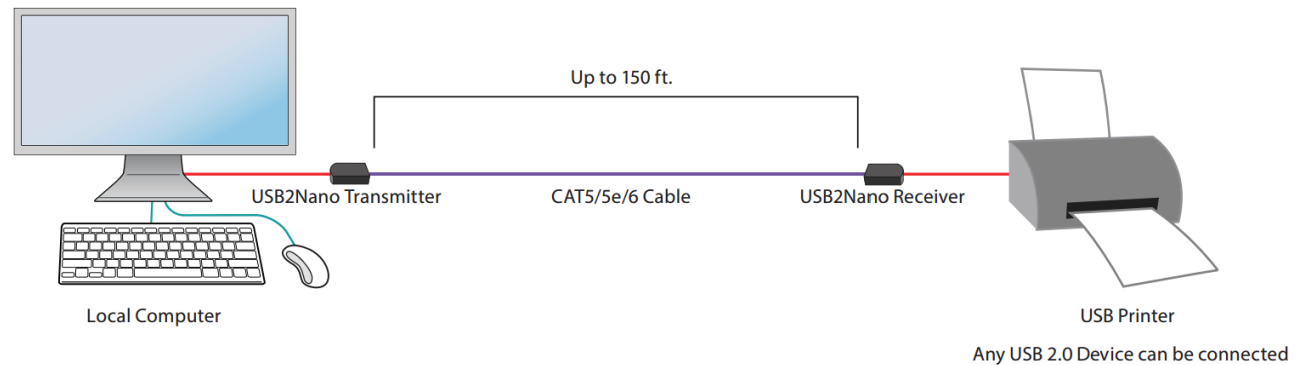

CONNECTING THE USB2Nano

1. Connect the *USB2Nano* Transmitter to the computer using the USB Type A (Male) connector of the device.
2. Power up the *USB2Nano* Receiver using the power supply provided.
3. Connect the *USB2Nano* Transmitter to the *USB2Nano* receiver using a CAT5e UTP cable (up to 150ft).
4. Connect a USB 2.0 peripheral device to the USB Type A (female) connector of the *USB2Nano* Receiver.

APPLICATIONS

- Digital Signage
- Home Networking
- Remote USB Connection
- USB Device Sharing
- USB Electronic Devices
- Security Systems