

CAT7 Shielded Stranded Bulk Cable



CAT7-BULK-STRND-GRAY

- Flame-retardant PVC jacket and polyethylene insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Category 7/Class F requirements
- Length: 1,000 Feet
- Gauge: 26 AWG
- OD: 0.224 ± .012"
- 600 MHz
- Foil shielded pairs, overall braided shield
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Color: gray

CAT7 Shielded Solid Bulk Cable



CAT7-BULK-GRAY-NPC

- Not intended for patch cords.
- Flame-retardant PVC jacket and polyethylene insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Category 7/Class F requirements
- Length: 1,000 Feet
- Gauge: 23 AWG
- OD: 0.291 ± .012"
- 600 MHz
- Foil shielded pairs, overall braided shield
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Color: gray.

CAT7 Outdoor Stranded Shielded Bulk Cable



CAT7-BULK-STRND-O-BLK15

- Excellent for harsh environments, indoor or outdoor.
- Ideal for connecting to servers located in another building.
- UV Resistant Polyurethane jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Category 7/Class F requirements
- Length: 1,500 Feet
- Gauge: 26 AWG
- OD: 0.256"
- Bend radius: 1.37" (35 mm)
- 600 MHz
- Resistant to most chemicals, fuels, oils, and materials.
- Withstands rough abrasive conditions.
- Operating temperature range: -40°F to 158°F (-40°C to 70°C).
- Suitable for portable applications, repeated spooling/un-spooling.
- Color: Black


CAT7 Flat Stranded Bulk Cable - 300 Meters



CAT7-FLT-BULK-300M-BLK

- These flat CAT7 noodle cables are only 0.098" thick and are ideal for hiding under carpets.
- Supports 10/100/1000/10G Base-T networks
- Consists of four individually shielded pairs.
- Stranded copper conductors for flexibility - great for frequent changes that occur at the wall outlet or patch panel.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Meets or exceeds ANSI/TIA/EIA 568B standard.
- Gauge: 32 AWG
- Thickness: 0.098" (2.5 mm)
- Width: 0.299" (7.6 mm)
- Color: Black
- Length: 984 ft (300 m)
- Ideal for running across a room without seeing it by hiding under carpet

CAT7 Super Flat Stranded Bulk Cable - 250 ft

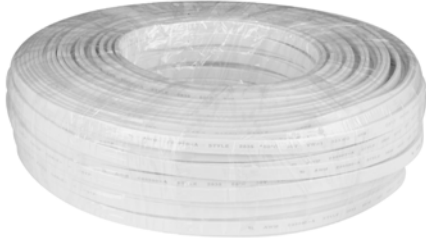

CAT7-SF-BULK-WHITE

- These super flat CAT7 noodle cables are only 0.075" thick and are ideal for hiding under carpets.
- Supports 10/100/1000/10G Base-T networks
- Consists of four individually shielded pairs.
- Stranded copper conductors for flexibility - great for frequent changes that occur at the wall outlet or patch panel.
- Supports full and half-duplex operation.
- Tested for electrical performance.
- Flame-retardant PVC jacket and polyolefin insulation.
- Meets or exceeds ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801, Class E requirements
- Gauge: 32 AWG
- Thickness: 0.075"
- Width: 0.25"
- Color: White
- Bend radius:
 - Up/Down: 60 mm
 - Left/Right: 0 mm
- Length: 250 feet
- Operating temperature: 32 to 140°F (0 to 60°C)
- Ideal for running across a room without seeing it by hiding under carpet
- Note: VPI currently does not offer compatible RJ45 plugs for this cable.