














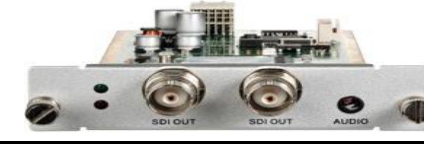




HMX Modular Matrix Switcher Cards Specifications

Input card				
Model	Interface	Picture	Description	Price *
HMX-HDMI-IN	HDMI		HDMI Type A Connector(Female) +3.5mm audio loop out HDMI1.3,HDCP1.3 and DVI 1.0 compatible	\$75
HMX-HDMI4K-IN	HDMI4K		HDMI Type A Connector(Female) + 3.5mm audio loop out HDMI1.3,HDMI1.4,HDCP1.3,HDCP1.4 and DVI 1.0 compatible	\$125
HMX-DVI-IN	DVI		DVI-I 24+5 pin female + 3.5mm audio DVI 1.0 ,HDCP 1.3 and HDMI1.3 compatible Resolution: 1024x768@60hz~1920x1200@60Hz	\$75
HMX-VGA-IN	VGA		D-Sub 15 pin female+ 3.5mm audio Support RGBHV, RGBS, RGsB, RsGsBs format Resolution: 1024x768@60hz~1920x1200@60Hz	\$75
HMX-SDI-IN	SDI		BNC*2 female+3.5mm audio SMPTE424M,SMPTE292M and SMPTE259M Standard Support SD-SDI, HD-SDI, 3G-SDI	\$125
HMX-HDBaseT-IN	HDBaseT		RJ45 female +3.5mm audio loop out HDBaseT1.0 and HDCP,transmission distance 70m/100m Resolution: 1024x768@60hz~1920x1200@60Hz	\$125

HMX-CVBS-IN	CVBS		BNC female + 3.5mm audio input NTSC3.58, NTSC4.42, PAL and SECAM Compatible Resolution: 480i, 576i	\$75
HMX-YPbPr-IN	YPbPr		RCA X3 + 3.5mm audio EIA-770.2a Standard Resolution: 480i, 576i, 480p, 576p, 720p, 1080i, 1080p	\$75
HMX-Fiber-IN	Fiber Optical		LC Single Core Fiber Optical +3.5mm audio loop out HDMI1.3, HDCP1.3 and DVI1.0 compatible ; Transmission distance:Multi-core 300M,Single core	\$250
Output card				
HMX-HDMI-OUT	HDMI		HDMI Type A Connector(Female) +3.5mm audio out HDMI1.3, HDCP1.3 and DVI 1.0 compatible Resolution: 1024x768@60hz~1920x1200@60Hz	\$75
HMX-HDMI4K-OUT	HDMI 4K		HDMI Type A Connector(Female) +3.5mm audio out HDMI1.3, HDMI1.4, HDCP1.3, HDCP1.4 and DVI 1.0 compatible	\$125
HMX-DVI-OUT	DVI		DVI-I 24+5 pin female +3.5mm audio out DVI 1.0 , HDCP 1.3 and HDMI1.3 compatible Resolution:	\$75
HMX-VGA-OUT	VGA		D-Sub 15 pin female + 3.5mm audio output Support RGBHV, RGBS, RGsB, RsGsBs format Resolution: 1024x768@60hz~1920x1200@60Hz	\$75

HMx-SDI-IN	SDI		BNC*2 female, dual redundant output +3.5mm audio output SMPTE424M, SMPTE292M and SMPTE259M Standard	\$125
HMx-HDBaseT-OU	HDBaseT		RJ45 female +3.5mm audio output HDBaseT1.0 and HDCP, transmission distance 70m/100m Resolution: Up to 1080P@60Hz, 1920x1200@60Hz	\$125
HMx-CVBS-OUT	CVBS		BNC female+3.5mm audio output NTSC3.58, NTSC4.42, PAL and SECAM compatible Resolution: 480i, 576i	\$75
HMx-YPbPr-OUT	YPbPr		RCA X3 standard port + 3.5mm audio output EIA-770.2a Standard Resolution: 480i, 576i, 480p, 576p, 20p, 1080i, 1080p	\$75
HXM-Fiber-OUT	Fiber Optical		LC Single Core Fiber Optical+3.5mm audio out HDMI1.3, HDCP1.3 and DVI1.0 compatible ; Transmission distance: Multi-core 300M,	\$250

* Price is when the card is installed and purchased in a complete system

Call 833-WolfPack (833-965-3722) for us to configure a system for you.