1

## HAWA Variotec 150/H

- Panel weight depends on running gear selection:
  Single running gear 70 kg (154 lbs.)
  Single running gear 100 kg (220 lbs.)
  Dual running gear 150 kg (330 lbs.)
- Vertical adjustment: +6/-3 mm (1/4”/1/8”)
- Minimum door thickness: 35 mm (1 3/8”)
- For curved applications: min. radius: 2 m (6’ 6 3/4”)
- Consists of modular components for easy assembly
- Running gear with 2 point guide
- Minimal space required in parking area
- Extremely quiet and smooth operation even through the curved components
- System can be used with and without a lower guide channel
- Individual parking configuration possible
- Suitable for curved sliding wall partitions

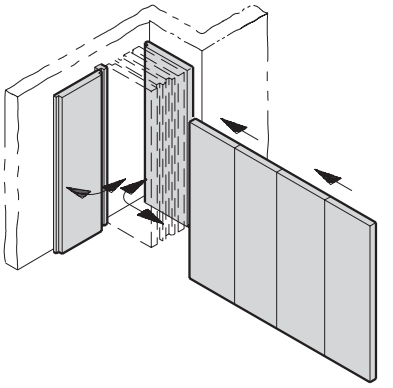







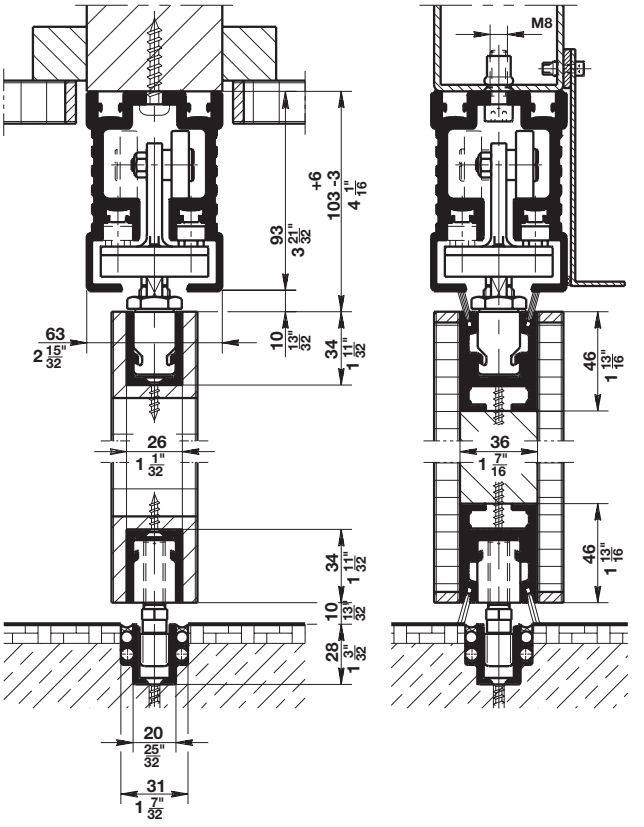


Dimensional data not binding. We reserve the right to alter specifications without notice.

**Dimensions in mm**
**Inches are approximate**

## HAWA Variotec 150/H

**Order Specifications:**

- Please provide the following details about your opening:
- Number of sliding panels
- Lower guide channel (yes or no)
- Clear opening size: width and height
- Panel width and height
- Panel weight
- Panel thickness
- Parking configuration: parallel, perpendicular or special (please provide a drawing/sketch)

**Note**
For additional details, information, availability and pricing please contact your product specialist at **1-888-437-7477.**

**Stacking Examples:**

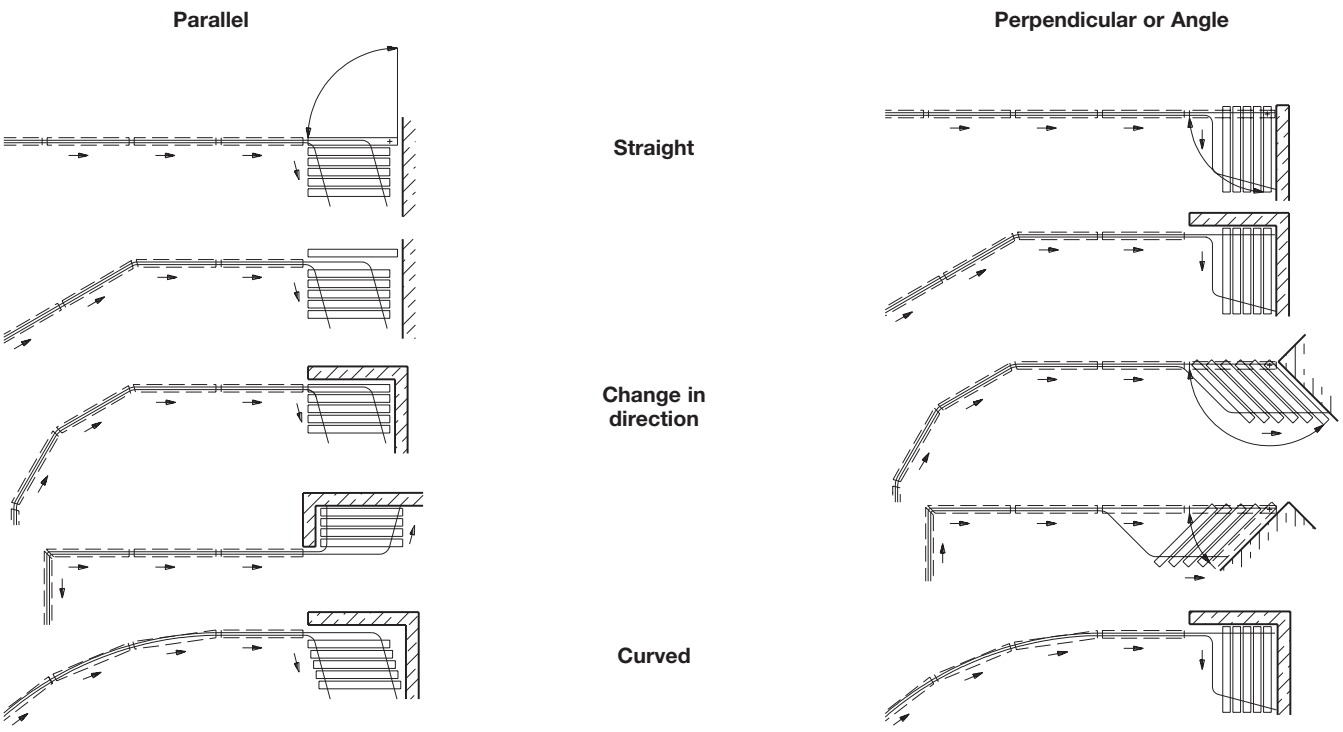


Dimensional data not binding. We reserve the right to alter specifications without notice.