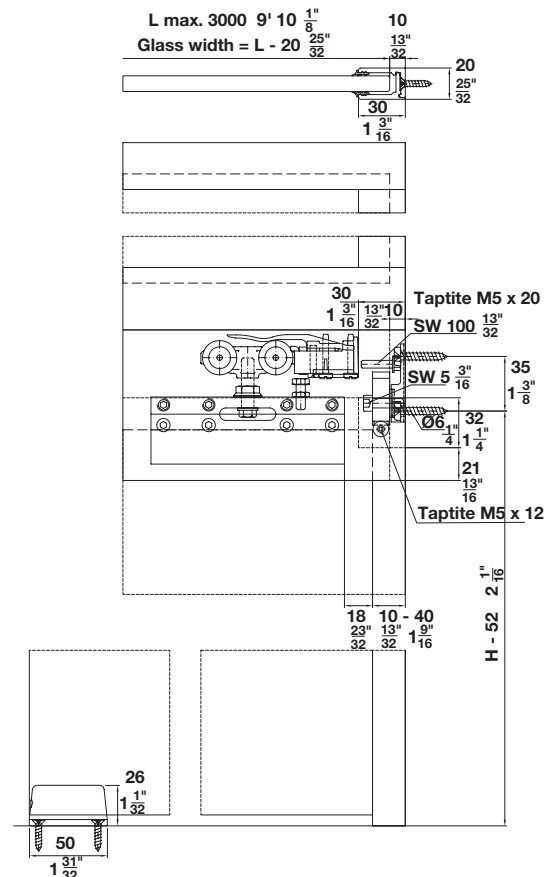
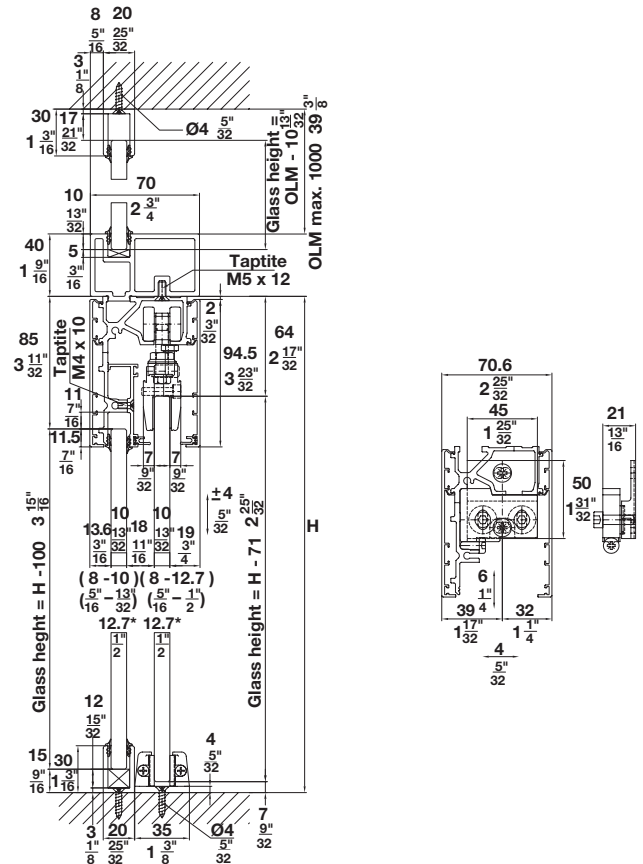
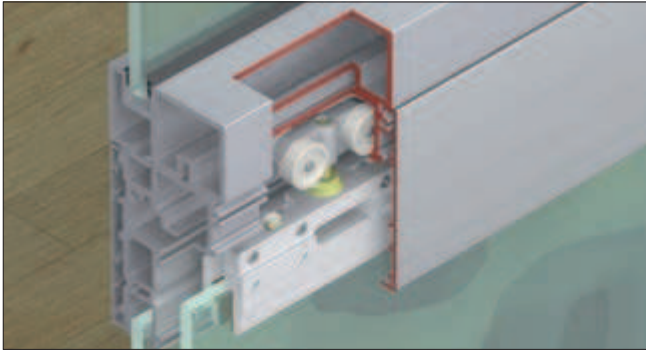


EKU Porta 100 GFO

- Maximum track weight: 100 kg (220 lbs.)
- For glass thickness: 8 – 12.7 mm (5/16" – 1/2")
- Maximum clear width: 3048 mm (10')
- Combination sliding and fixed glass including overhead glass transom
- For 1 and 2 sliding glass doors
- Suspension with clamping shoe
- Rattle-free bottom guide
- Simple installation
- No glass cut-outs required
- Vertical adjustment without removing the glass door
- 12.7 mm (1/2") glass possible with silicone sealing

Installation Tips

When using 2 sliding doors on the same track, please make sure that glass panels do not collide. Please use a lower guide channel with a door stopper or use protective edge trim.











Dimensions in mm
Inches are approximate

EKU Porta 100 GFO

	Item No.
	941.00.007

Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	941.00.015
	Suspension bolt, M8 x 32	Steel	zinc-plated	2 pcs.	940.54.021
	Set nut, M8	Steel	zinc-plated	2 pcs.	940.54.022
	Clamp shoe adjustable from 6 – 12.7 mm (1/4" – 1/2")	Aluminum	mill finish	2 pcs.	941.00.020
	Track stopper, with adjustable retention spring	Plastic	gray	1 pc.	940.60.043
	Track stopper	Plastic	gray	1 pc.	940.60.041
	Floor guide, adjustable from 6 – 12.7 mm (1/4" – 1/2")	–	–	1 pc.	941.00.031
	Buffer	Rubber	black	1 pc.	940.60.051

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount















Dimensional data not binding. We reserve the right to alter specifications without notice.

Floor mounted door stop	page 1.290
Toplock	pages 1.352-1.356

Dimensions in mm
 Inches are approximate

EKU Porta 100 GFO

Individual Components

	Description	Material	Finish	Length	Item No.
	Wall bracket set, set for mounting 1 upper track	-	-	-	941.00.060
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")	Aluminum	unanodized	2.5 m (8' 2 7/16")	941.00.254
	Upper track, pre-drilled, 95 x 62 mm (3 3/4" x 2 7/16")			6 m (19' 8 1/4")	941.00.604
	Reinforcement profile, 43 x 70 mm (1 11/16" x 2 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.525
				6 m (19' 8 1/4")	941.01.560
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.825
	Clip-on fascia to upper track, 94.5 x 9 mm (3 23/32" x 11/32")			6 m (19' 8 1/4")	941.00.860
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.825
	Support profile for fixed glass, pre-drilled, 53 x 19 mm (2 3/32" x 3/4")			6 m (19' 8 1/4")	941.01.860
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.01.725
	Fixed glazing profile/lower guide channel, Pre-drilled, 30 x 20 mm (1 3/16" x 25/32")			6 m (19' 8 1/4")	941.01.760
	Angle profile for fixed glass, pre-drilled, 30 x 19 mm (1 3/16" x 3/4")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.420
	Angle profile for fixed glass, 30 x 17 mm (1 3/16" x 11/16")	Aluminum	anodized	2 m (6' 6 3/4")	941.01.320
	Wall profile, 38 x 21 mm (1 1/2" x 13/16")	Aluminum	anodized	2.5 m (8' 2 7/16")	941.24.925
				3.5 m (11' 5 13/16")	941.24.935
	Seal for wall profile	Rubber	black	2.5 m (8' 2 7/16")	941.24.081
				3.5 m (11' 5 13/16")	941.24.082
	Fixing set for support profile and Fixed glazing profile	-	-	-	941.01.899
	Sealing profile for 8 and 10 mm (5/16" and 3/8") glass	Rubber	black	20 m (65' 7 7/16")	941.00.103
	Seal	Plastic	black	20 m (65' 7 7/16")	941.00.094
	Soft closer 10 – 60 kg (22 – 132 lbs.)	-	-	-	940.60.045
	Soft closer 61 – 100 kg (135 – 220 lbs.)	-	-	-	940.60.010
	Cover cap for notched service access in track	-	-	-	940.60.094

Note

Mounting instructions (included in fitting set) for planning and execution available upon request.