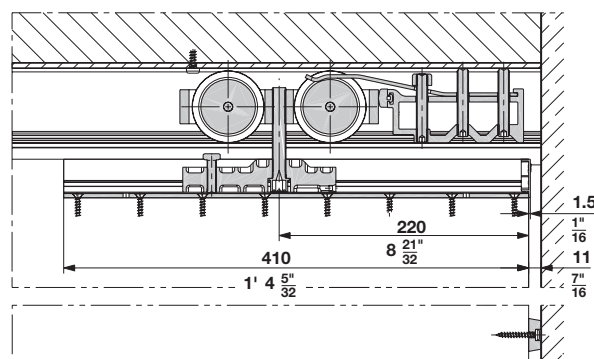
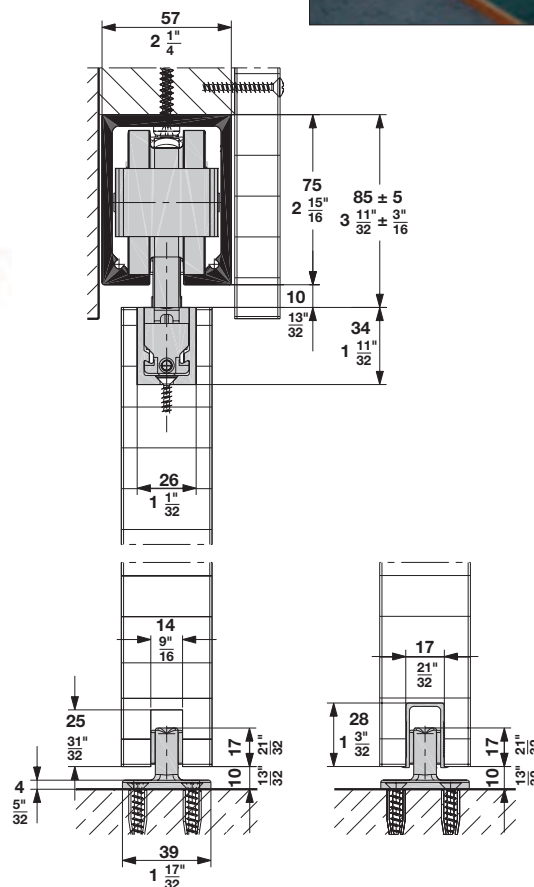


1

HAWA Junior 250/B

- Maximum door weight: 250 kg (550 lbs.)
- Minimum door thickness: 35 mm (1 3/8")
- For 1 and 2 sliding wood doors
- Minimum installation height
- Outstanding durability
- Rattle-free bottom guide
- Suspension with carrier profile
- Smooth quiet operation
- Vertically adjustable ± 5 mm ($\pm 3/16$ ")
- Door stop with adjustable retention spring



Dimensions in mm
Inches are approximate

AH 1.84

www.hafele.com/us








Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA Junior 250/B Set

- For 1 sliding door without upper track and lower guide channel

| | Item No. |
|--|------------|
| | 942.56.002 |





Set Components

| | Description | Material | Finish | Qty. | Item No. |
|---|--|----------|-----------------|--------|------------|
|  | Double roller running gear | – | – | 2 pcs. | 942.56.012 |
|  | Carrier profile with suspension plates and M12 hanger bolt | – | – | 2 pcs. | 942.56.024 |
|  | End caps for carrier profile | Plastic | anthracite gray | 2 pc. | 942.56.029 |
|  | Floor mounted guide, rattle-free | Plastic | black | 1 pc. | 941.60.031 |
|  | Track stopper with adjustable retention spring | – | – | 1 pc. | 942.56.041 |
|  | Wall buffer | Rubber | black | 1 pc. | 941.60.051 |
|  | Locking wrench | Steel | – | 1 pc. | 941.20.091 |

Note

Item numbers are valid only for 1 piece, when ordering individual components, please state the desired amount.
Depending on application an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets.

Individual Components

| | Description | Material | Finish | Length | Item No. |
|---|------------------------------------|----------|----------------|----------------------|------------|
|  | Upper track, pre-drilled | Aluminum | clear anodized | 4 m (13' 1 1/2") | 942.56.940 |
| | | | | 6 m (19' 8 1/4") | 942.56.960 |
|  | Suspension profiles | Aluminum | clear anodized | 2.5 m (8' 2 7/16") | 946.14.925 |
| | | | | 6.5 m (21' 3 15/16") | 946.08.651 |
|  | Guide rail, glue-in type | Plastic | black | 3 m (9' 10 1/8") | 941.61.130 |
|  | Connecting bolts, for upper tracks | Steel | galvanized | – | 942.56.090 |

Installation Plan

(Included in fitting set), mounting instructions for planning and execution available upon request.

| | |
|---------------------------|------------|
| Confort guides | page 1.198 |
| Other lower guide options | page 1.199 |

Dimensions in mm
Inches are approximate