

- Especially suited for use in larger door cabinets such as home theater applications
- For use with doors up to 60" high, 24" wide & weighing up to 35 lbs.
- Accommodates doors up to 1 1/4" thick
- Jigs or fixtures are not required to locate slide top and bottom, integral location tabs locate slides in cabinet
- Adjustment screws allow maximum adjustability, cable tensioning adjustment is located at the slide front
- Easily accessible from front of cabinet
- Steel cable is black nylon coated to reduce friction and enhance appearance
- Cable runs parallel with slide to ensure smooth operation, eliminating excess pressure on slide
- Positive out-stop on slide keeps door in alignment in closed position
- Soft rubber roller on slide front protects door front from scratches and marring
- Minimal installation and adjustment time for lower production costs
- 32 mm compatible
- Patent pending



XL Slide


- With cables attached
- Travel distance = slide length - 114 mm (4 1/2")

Material: Steel, Zinc-electroplated and Plastic
Cable: Steel, nylon coated; Color: black

Length	Travel	Item No.
408 (16 1/16")	294 (11 1/2")	408.24.315
440 (17 5/16")	326 (12 7/8")	408.24.324
504 (19 7/8")	390 (15 3/8")	408.24.333
536 (21 1/8")	422 (16 5/8")	408.24.342
600 (23 5/8")	486 (19 1/8")	408.24.351
664 (26 1/8")	550 (21 3/4")	408.24.360


Note

Accessory pack required to complete assembly, refer to next page.

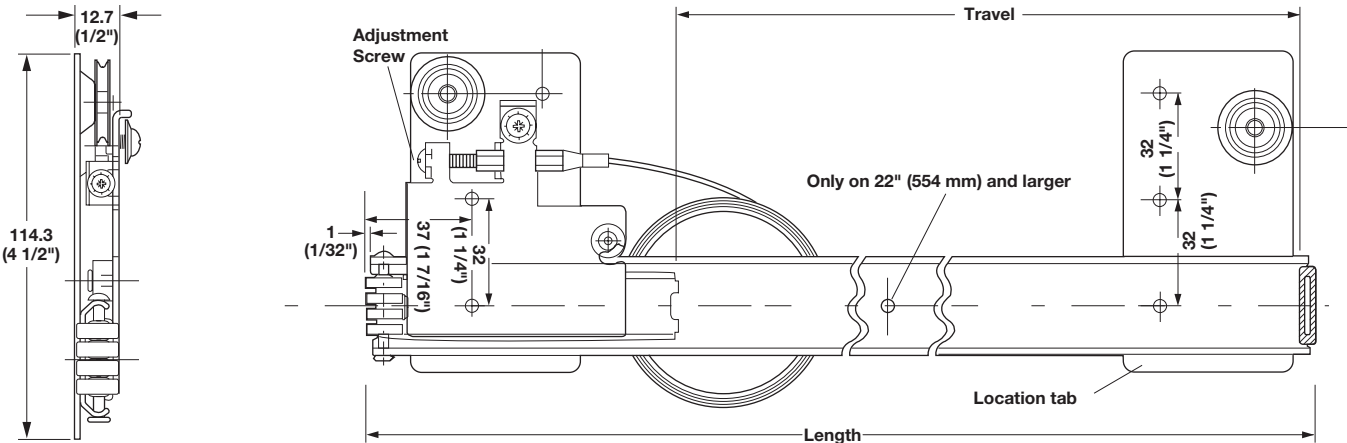

Dimensional data not binding. We reserve the right to alter specifications without notice.

XL Slide

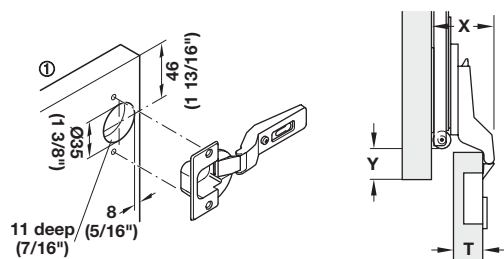

35 mm - Inlay Door Accessory Pack


For door thickness 16 – 19 mm (5/8" – 3/4")

	Item No.
self-closing	408.24.020
free-swinging	408.24.050

Supplied With

Mounting instructions

- 4 020.05.211 – M4 x 5 mm – Hinge plate mounting screws
- 4 015.55.639 – 3.5 x 15 mm – Hinge mounting screws
- 2 418.09.300 – Pivot roller
- 2 015.31.675 – Pivot roller mounting screw
- 10 013.03.304 – Slide mounting screws
- 2 329.31.502 – 94°, 35 mm cup hinge, self-closing, or
- 2 329.31.002 – 94°, 35 mm cup hinge, free swinging
- 2 329.71.503 – Clip mounting plate, with single screw adjustment

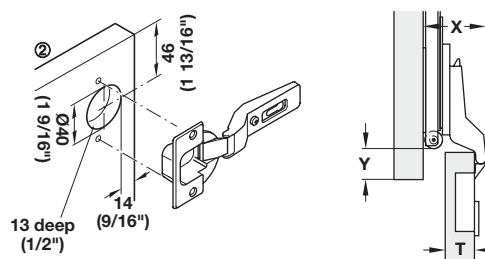

40 mm - Inlay Door Accessory Pack

For door thickness 19 – 32 mm (3/4" – 1 1/4")



	Item No.
self-closing	408.24.002
free-swinging	408.24.004

Supplied With

Mounting instructions

- 4 020.05.211 – M4 x 5 mm – Hinge plate mounting screws
- 4 015.55.639 – 3.5 x 15 mm – Hinge mounting screws
- 2 418.09.300 – Pivot roller
- 2 015.31.675 – Pivot roller mounting screw
- 10 013.03.304 – Slide mounting screws
- 2 329.05.632 – 94°, 40 mm cup hinge, self-closing, or
- 2 329.04.635 – 94°, 40 mm cup hinge, free swinging
- 2 329.71.500 – Clip mounting plate, with single screw adjustment

Typical Installation

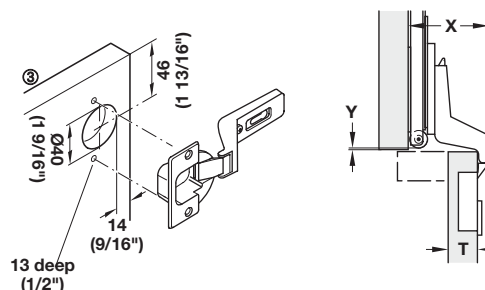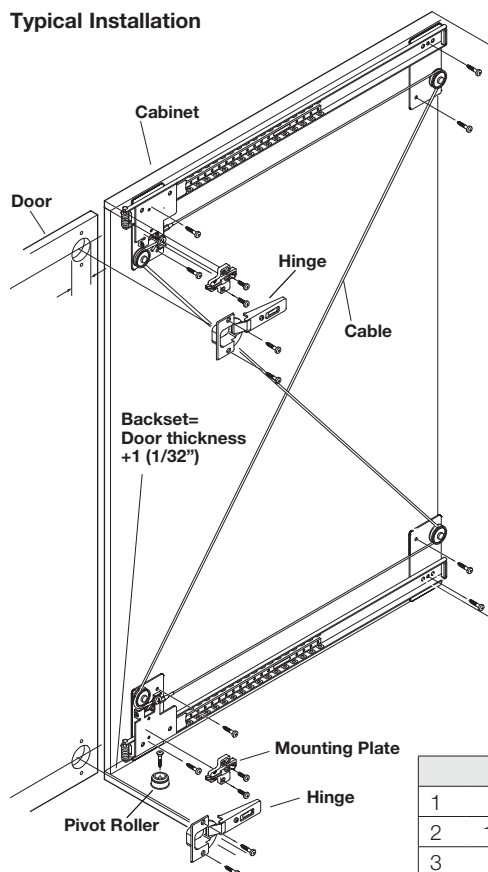

40 mm - Overlay Door Accessory Pack

For door thickness 19 – 22 mm (3/4" – 7/8")

Maximum overlay: 7 mm (1/4")

	Item No.
	408.24.011

Supplied With

Mounting instructions

- 4 020.05.211 – M4 x 5 mm – Hinge plate mounting screws
- 4 015.55.639 – 3.5 x 15 mm – Hinge mounting screws
- 2 418.09.300 – Pivot roller
- 2 015.31.675 – Pivot roller mounting screw
- 10 013.03.304 – Slide mounting screws
- 2 329.05.614 – 94°, 40 mm cup hinge, self-closing
- 2 329.71.500 – Clip mounting plate, with single screw adjustment

Note

When using free swinging hinges it is recommended to use catches.

	T	X	Y
1	16 – 19 (5/8" – 3/4")	45 (1 3/4")	T + 1 (1/32")
2	19 – 32 (3/4" – 1 1/4")	64 (2 1/2")	T + 1 (1/32")
3	19 – 22 (3/4" – 7/8")	50 (2")	1 (1/32")