

EKU Clipo 16 H Inside

Maximum door weight: 16 kg (35 lbs.)




Maximum door height: 1400 mm (55 1/8")

Maximum door width: 1000 mm (39 3/8")


Door thickness: 16 - 19 mm (5/8" - 3/4")

Height adjustment: +2/-1 mm (+1/16" - 1/32")


- Running gears with clip-mounting, plastic rollers with metal axles
- Optional soft close
- Quick door mounting
- No guide rails in the floor
- A wood cover panel is not needed

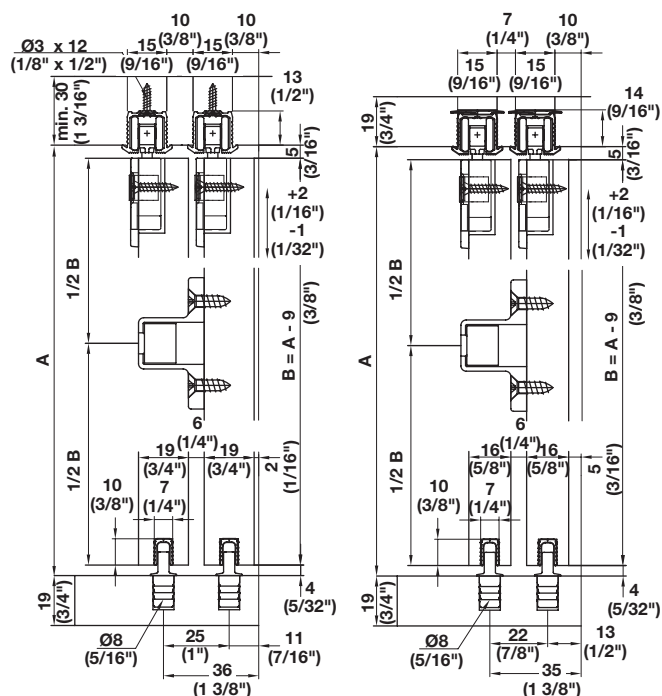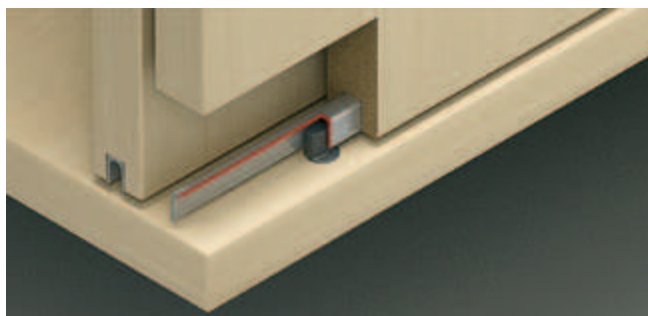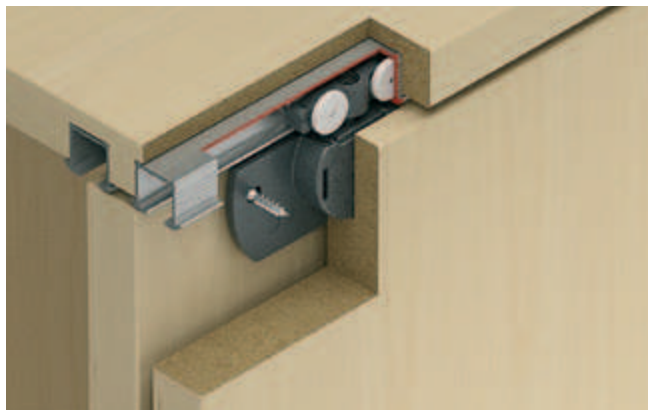


Soft Close Mounting




Door with one Soft Close mechanism

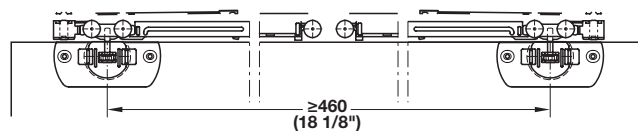

Door with two Soft Close mechanisms


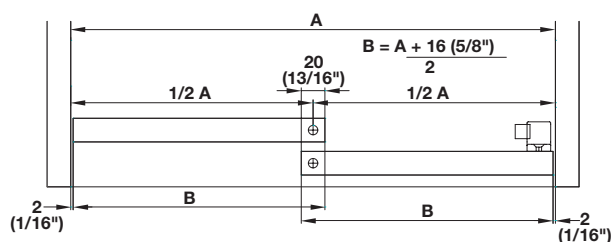


Drilling Pattern





Upper track, screw mounting

Double upper track, screw mounting

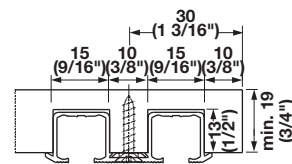

Upper track, for gluing into groove

Upper track, with rotating fasteners



EKU Clipo 16 H Inside Set

	Item No.
For 2 sliding doors	405.82.216









Note

The complete set is always delivered without upper track, lower guide channel, soft close mechanism and service port, please order separately.

Set Components

	Description	Material	Finish/Color	Qty.	Item No.
	Running gear, snaps into housing	Plastic	anthracite	4 pcs.	-
	Housing, for screw mounting	Plastic	anthracite	4 pcs.	-
	Track stopper, for upper tracks	Plastic	gray	2 pcs.	405.83.981
	Guide, for mounting in drilled holes	Plastic	anthracite	2 pcs.	405.83.191
	Soft stop, for screw mounting	Plastic	gray	1 pc.	

Individual Components

	Description	Min. cabinet top thickness	Material	Finish/Color	Length	Item No.	
	Upper track, for gluing into groove (polyurethane glue recommended)	19 (3/4")	Aluminum	bright	2.5 m (8' 2 7/16")	405.87.042	
	Upper track, with rotating fasteners (not suitable for hard wood)	19 (3/4")	Aluminum	bright	2.5 m (8' 2 7/16")	405.87.092	
	Upper track, pre-drilled, for screw mounting	30 (1 3/16")	Aluminum	bright	2.5 m (8' 2 7/16")	405.87.082	
	Double upper track, pre-drilled, for screw mounting	19 (3/4")	Aluminum	bright	2.5 m (8' 2 7/16")	405.90.032	
	Lower guide channel, with harpoon ribs	-	Plastic	anthracite	2.5 m (8' 2 7/16")	405.98.517	
	Soft Close mechanism, optional for screw mounting to housing	For doors <8 kg (17.6 lbs.)	-	Plastic	gray	-	405.10.077
	One set includes two mechanisms. Two sets are required for dual soft closing of two doors.	For doors 8 kg - 16 kg (17.6 - 35 lbs.)	-	Plastic	gray	-	405.10.075
	Service port, for upper track with rotating fasteners (to access running gear after installation)	-	Plastic	gray	-	405.83.180	
	Service port, for upper track with screw mounting (to access running gear after installation)	-	Plastic	gray	-	405.83.181	

Dimensional data not binding. We reserve the right to alter specifications without notice.

Flat head screws [pages 11.132-11.133, 11.135](#)

Dimensions in mm
Inches are approximate