


Grass TIOMOS

- Soft-close or self-close
- A hinge system for all door applications
- 3 soft close settings, invisibly integrated in hinge arm
- Screw, dowel or Impresso mounted
- 3-dimensional, continuous adjustment facility for door via eccentric (side adjustment) or special tech (depth and height adjustment):
 Side adjustment ± 2 mm
 Depth adjustment from $-2/+ 3$ mm
 Height adjustment ± 2.5 mm depending on the mounting plate


Note

Dimensions in drawings and tables are calculated using factory settings and for mounting plate height 2 mm (3/32").


Full overlay plus

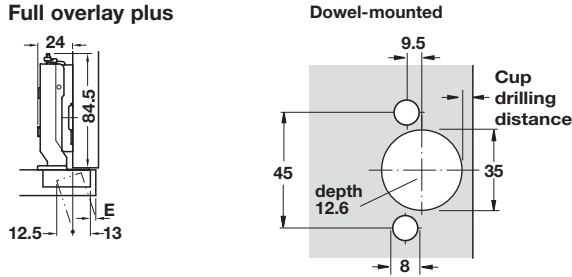

Full overlay

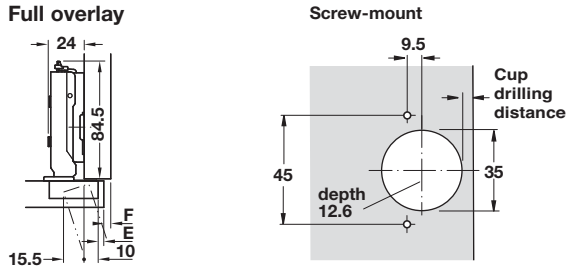

Half overlay



soft&silent)))

Opening angle: **120°**



Full Overlay Plus

- For large door overlay up to 24 mm

Material: Steel; Finish: nickel-plated

Version	Hinge Arm	Screw	Dowel	Impresso
Soft-close		348.36.800	348.36.810	348.36.730
Self-close		348.36.600	348.36.610	348.36.530

Door Overlay	15	16	17	18	19	20	21	22*
0 baseplate				3	4	5	6	7
2 baseplate		3	4	5	6	7		

E - cup drilling distance

Note

Door overlay over 24 mm possible, with side adjustment by ± 2 mm.

Full Overlay Mounting

Material: Steel; Finish: nickel-plated

Version	Hinge Arm	Screw	Dowel	Impresso
Soft-close		348.36.801	348.36.811	348.36.731
Self-close		348.36.601	348.36.611	348.36.531

Door Overlay	12	13	14	15	16	17	18	19
0 baseplate				3	4	5	6	7
2 baseplate		3	4	5	6	7		

E - cup drilling distance

Half Overlay/Twin Mounting

Material: Steel; Finish: nickel-plated

Version	Hinge Arm	Screw	Dowel	Impresso
Soft-close		348.36.802	348.36.812	348.36.732
Self-close		348.36.602	348.36.612	348.36.532

Door Overlay	5.5	6.5	7.5	8.5	9.5	10.5	11.5	12.5
0 baseplate				3	4	5	6	7
2 baseplate		3	4	5	6	7		

E - cup drilling distance

Dimensional data not binding. We reserve the right to alter specifications without notice.

Mounting plates and cover caps pages 9.56-9.57

