




## HD THERMAL IMAGING CAMERA

# FLIR T1K™

The FLIR T1010 and T1020 offer remarkable temperature measurement range, up to 3.1 MP resolution, and a modern, intuitive graphical user interface (GUI) that will streamline your workday. Features such as MSX® and 1-Touch Level/ Span enhance image quality and contrast, so you can interpret images on-screen and make crucial decisions in the field. When paired with FLIR OSX™ Precision HDIR optics, these true HD cameras measure temperature with the highest accuracy and deliver stunning image quality. For the sharpest images, the truest temperatures, and the most flexibility, T1K cameras are the tool of choice for the thermography expert.

[www.flir.com/t1k](http://www.flir.com/t1k)

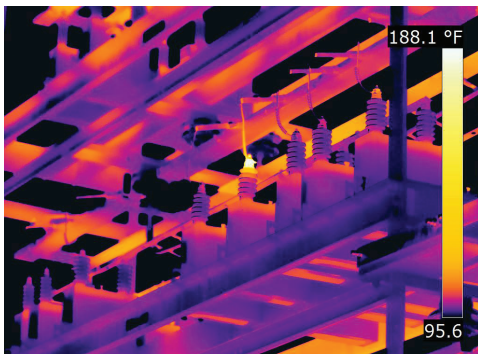

### Outstanding Image Clarity

See more detail and find hidden problems before they lead to costly system failures or shutdowns

- Get the best resolution of any FLIR hand-held camera with the T1K's 1024 x 768 detector
- Detect subtle temperature differences, down to  $<0.01^{\circ}\text{C}$ , that may signal an electrical or mechanical problem
- Record smooth, low-noise images that are easy to interpret with FLIR Vision Processing™, featuring MSX, UltraMax®, and proprietary adaptive filtering algorithms



### Exceptional Measurement Performance

Get accurate temperature readings from any angle or distance, so you can troubleshoot systems faster

- Pinpoint small temperature anomalies from farther away with FLIR's high-fidelity OSX Precision HDIR lenses
- Enhance measurement accuracy with UltraMax, which improves the distance to spot-size ratio
- Monitor electrical and mechanical systems with a variety of temperature conditions thanks to measurement ranges up to  $2000^{\circ}\text{C}$  ( $3632^{\circ}\text{F}$ )\*



### Designed for the Expert User

Compact format, a responsive new user-interface, and advanced reporting software make your workday more productive

- Navigate screens and set up work folders easily with intuitive, rapid-response GUI
- Adjust images and improve measurements in the camera with features such as 1-Touch Level/ Span
- Capture full-resolution, full-frame radiometric video for comprehensive analysis\*
- Analyze thermal images and report findings easily with included FLIR Tools+ software

\*T1020 only

## SPECIFICATIONS

Specifications	T1010	T1020
IR Resolution	1024 × 768 (786,432 pixels)	1024 × 768 (786,432 pixels)
UltraMax®	3.14 Mpixels	3.14 Mpixels
Thermal Sensitivity/NETD	<25 mK @ 30°C (86°F)	<20 mK @ 30°C (86°F)
Field of View (FOV)	45° × 34° (21 mm lens), 28° × 21° (36 mm lens), 12° × 9° (83 mm lens)	45° × 34° (21 mm lens), 28° × 21° (36 mm lens), 12° × 9° (83 mm lens)
F-Number	f/1.2	f/1.2
Lens Identification	Automatic	Automatic
Image Frequency	30 Hz	30 Hz
Focus	One-shot, manual	One-shot, manual
Digital Zoom	1-8x continuous	1-8x continuous
<b>Detector Data</b>		
Detector Type and Pitch	Uncooled microbolometer, 17 µm	Uncooled microbolometer, 17 µm
Spectral Range	7.5 – 14.0 µm	7.5 – 14.0 µm
<b>Image Presentation and Modes</b>		
Display	4.3", 800 × 480 pixel capacitive touch screen with auto-orientation	4.3", 800 × 480 pixel capacitive touch screen with auto-orientation
Viewfinder	—	Built-in, 800 × 480 pixels
Digital Camera	5 MP with built-in LED	5 MP with built-in LED
Color Palettes	Iron, Rainbow, Rainbow HC, White hot, Black hot, Arctic, Lava,	Iron, Rainbow, Rainbow HC, White hot, Black hot, Arctic, Lava,
Image Modes	Infrared, visual, MSX	Infrared, visual, MSX, Picture-in-Picture
Picture-in-Picture	—	Resizable and movable
Time-lapse (Infrared)	—	15 sec to 24 hrs
<b>Measurement and Analysis</b>		
Object Temperature Range	-40°C to 150°C (-40°F to 302°F), 0°C to 650°C (32°F to 1200°F)	-40°C to 150°C (-40°F to 302°F), 0°C to 650°C (32°F to 1200°F), 300°C to 2000°C (572°F to 3632°F)
Accuracy	±2°C (±3.6°F) or ±2% of reading at 25°C (77°F)	±1°C (±1.8°F) or ±1% at 25°C (77°F) for temperatures from 5°C to 150°C (41°F to 302°F)
Alarms	—	Above, below, interval, moisture, insulation
Measurement function alarm	—	Audible/visible above/below alarms on any selected measurement function
Compass, GPS	—	Yes; automatic GPS image tagging
METERLINK®	—	Yes; several readings
Measurement Presets	No measurement, center spot, hot spot, cold spot, User Preset 1, User Preset 2	No measurement, center spot, hot spot, cold spot, User Preset 1, User Preset 2
Spotmeter	1	10
Area	1 box with max/min/avg	5 + 5 areas (boxes and circles) with max/min/avg
Laser Pointer	Dedicated button	Dedicated button
<b>Data Storage and Streaming</b>		
Storage Media	Removable SD card	Removable SD card
Image File Format	Standard JPEG with measurement data included	Standard JPEG with measurement data included
Radiometric IR Video Recording	—	Real-time radiometric recording (.csq)
Non-Radiometric IR or Visual Video	H.264 to memory card	H.264 to memory card
Radiometric IR Video Streaming	Yes, over USB	Yes, over USB
Non-Radiometric IR Video Streaming	H.264 over USB	H.264 over Wi-Fi or USB
Video Out	—	HDMI 640 × 480, HDMI 1280 × 720, DVI 640 × 480, DVI 800 × 600
<b>Additional Data</b>		
Battery Type	Rechargeable Li-ion battery	Rechargeable Li-ion battery
Battery Operating Time	Approx. 2.5 hours at 25°C (77°F) ambient temperature and typical use	Approx. 2.5 hours at 25°C (77°F) ambient temperature and typical use
Operating Temperature Range	-15°C to 50°C (5°F to 122°F)	-15°C to 50°C (5°F to 122°F)
Storage Temperature Range	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Shock/Vibration/Encapsulation; Safety	25 g / IEC 60068-2-29, 2 g / IEC 60068-2-6, IP 54 / IEC 60529; EN/UL/CSA/PSE 60950-1	25 g / IEC 60068-2-29, 2 g / IEC 60068-2-6, IP 54 / IEC 60529; EN/UL/CSA/PSE 60950-1
Tripod Mounting	UNC ¼"-20	UNC ¼"-20
Weight/Dimensions w/o Lens	2.1 kg (4.6 lbs), 16.7 × 20.5 × 18.8 cm (6.6 × 8.0 × 7.4 in)	2.1 kg (4.6 lbs), 16.7 × 20.5 × 18.8 cm (6.6 × 8.0 × 7.4 in)
<b>Box Contents</b>		
	Infrared camera with lens, battery (2 ea) battery charger, neck strap, hard transport case, Bluetooth headset*, lens cap, power supplies, SD card, cables (Std A to Micro-B USB, HDMI to HDMI), FLIR Tools+, printed documentation	

\*T1020 model

Specifications are subject to change without notice. For the most up-to-date specs, go to [www.flir.com](http://www.flir.com)

### CORPORATE HEADQUARTERS

FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
PH: +1 877.773.3547

### LATIN AMERICA

FLIR Systems Brasil  
Av. Antonio Bardella, 320  
Sorocaba, SP 18085-852  
Brasil  
PH: +55 15 3238 7080

### CHINA

FLIR Systems Co., Ltd  
Rm 1613-16, Tower II  
Grand Central Plaza  
138 Shatin Rural Committee Rd.  
Shatin, New Territories  
Hong Kong  
PH: +852 2792 8955

### EUROPE

FLIR Systems, Inc.  
Luxemburgstraat 2  
2321 Meer  
Belgium  
PH: +32 (0) 3665 5100

[www.flir.com](http://www.flir.com)  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2018 FLIR Systems, Inc. All rights reserved. (01/18)

17-3308-INS-TNS



The World's Sixth Sense®