




Professional-grade
instruments for field service

Model SC52
Dual Display
Clamp-on Meter

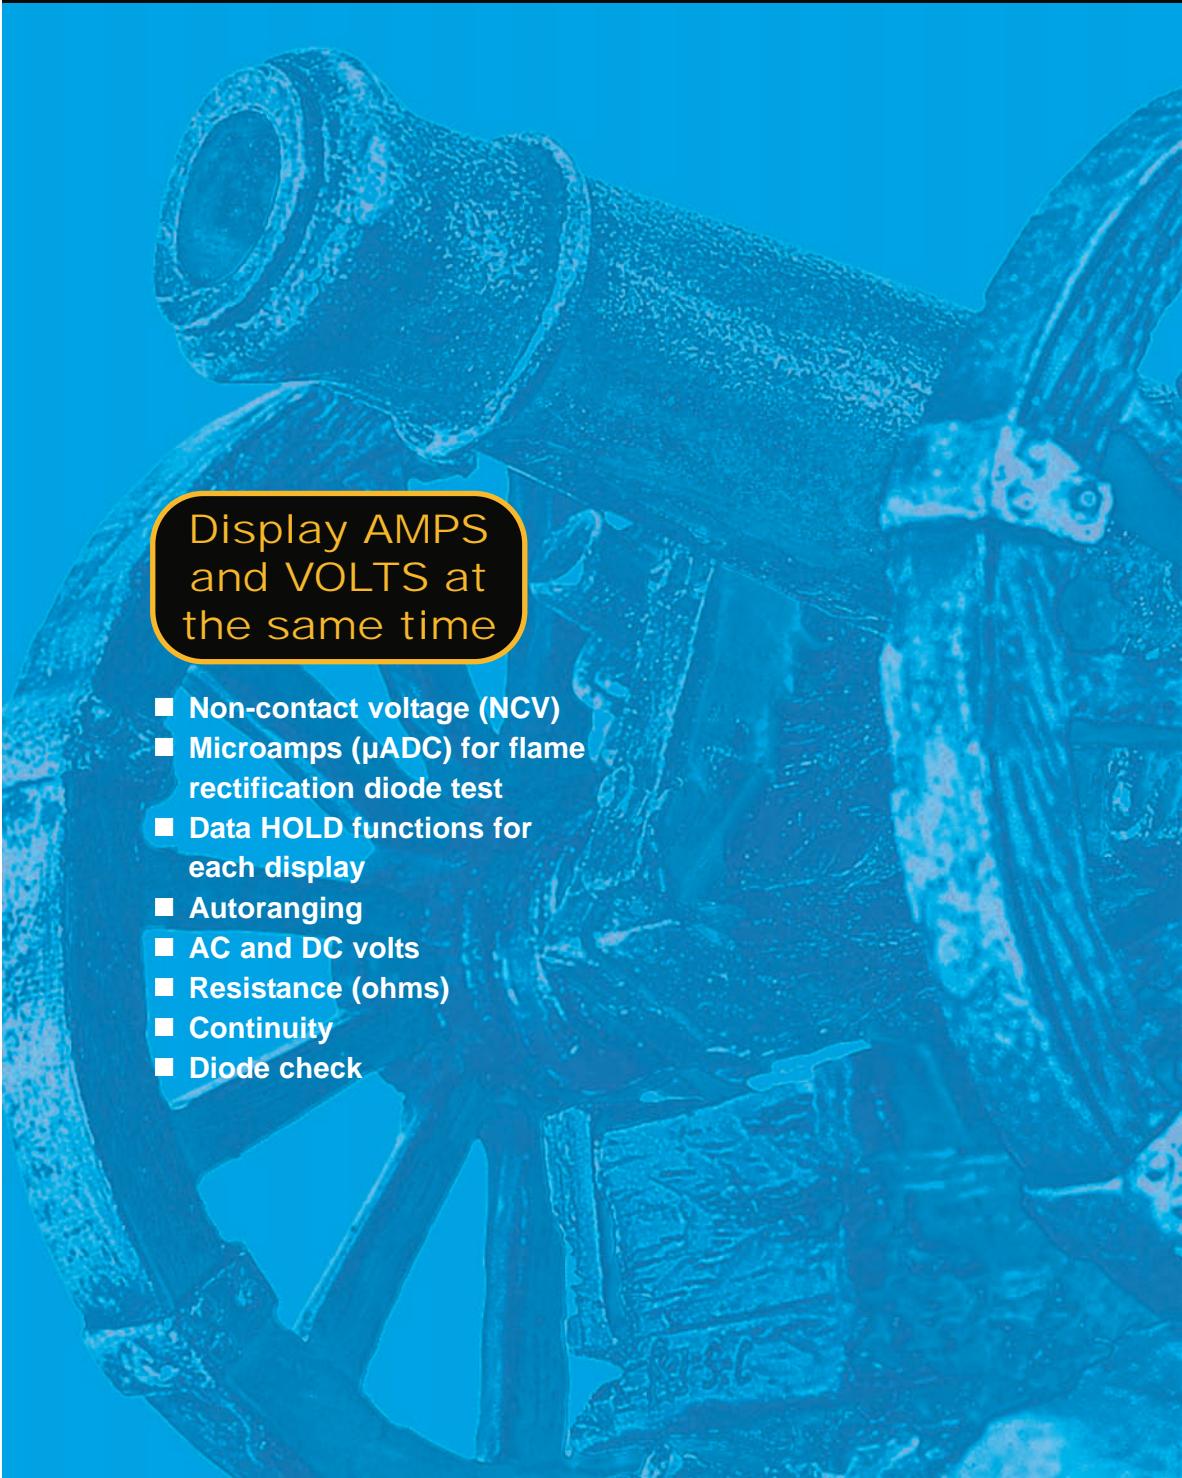

Display AMPS
and VOLTS at
the same time

- Non-contact voltage (NCV)
- Microamps (μ ADC) for flame rectification diode test
- Data HOLD functions for each display
- Autoranging
- AC and DC volts
- Resistance (ohms)
- Continuity
- Diode check



Professional-grade
instruments for field service

Model SC53
Dual Display
Clamp-on Meter

Display AMPS
and VOLTS at
the same time

- 400°F Temperature
- Capacitance to 4000 μ F (4mF)
- Non-contact voltage (NCV)
- Data HOLD functions for each display
- Autoranging
- AC and DC volts
- Continuity