



*The Safety Company*

# ALTAIR<sup>®</sup> io360

Gas Detector




THE FUTURE OF AREA MONITORING.

WE KNOW WHAT'S AT STAKE.


## The Simple Usability of a Smart Home Product. The Rugged, Reliable Performance You Expect from MSA.

You shouldn't need IT skills and special equipment to set up your area monitoring network—it should just work. ALTAIR io360 Gas Detectors are preconfigured and ready-to-go out of the box, requiring less time for training and setup.

Guided setup, installation tips, and real-time feedback replace complex instructions, scrolling through screens, and overwhelming menu selections. All you need are a few quick swipes on the Safety io Grid mobile app to know you got it right the first time.

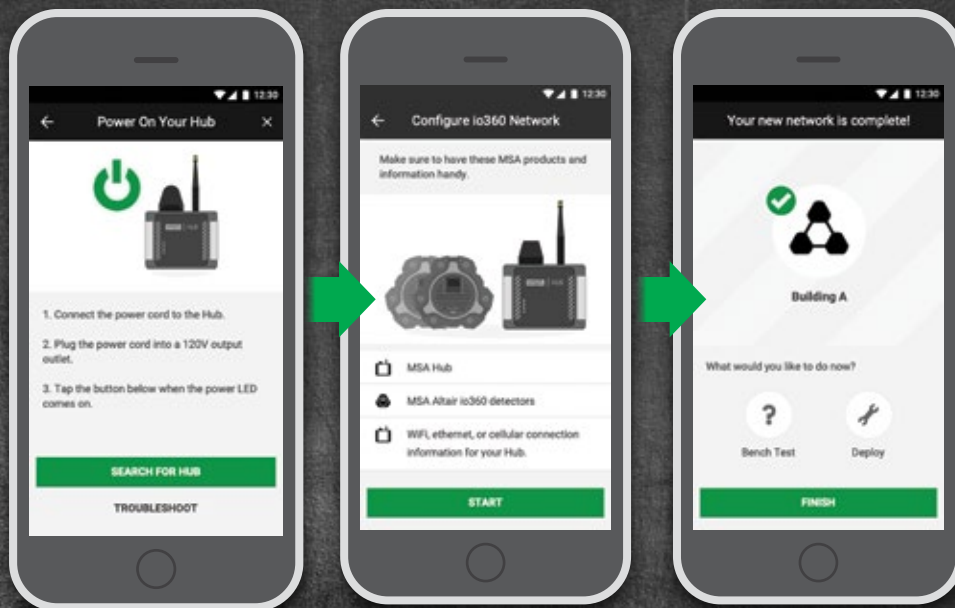

## Flexible Monitoring and Effortless Connectivity Help to Make Your Workers and Job Sites Safer

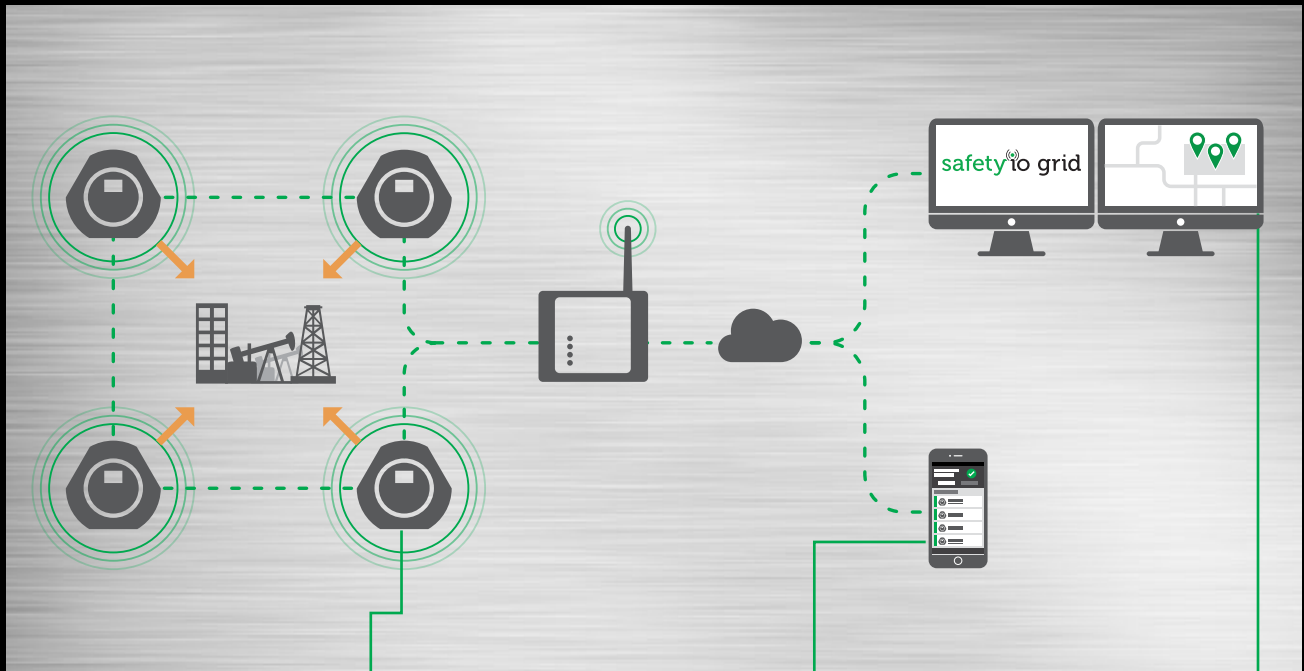

Gas detection and local alarms for high-risk areas. Just turn on your ALTAIR io360 Gas Detectors and deploy where needed.



The MSA HUB allows up to 32 ALTAIR io360 Gas Detectors to form a network you manage locally via the Safety io Grid mobile app.



Connecting your gas detection network to Safety io Grid gives you the power to remotely manage and monitor your fleet of detectors, capture data, and take action to create safer sites.

# Monitor Along a Fenceline, Confined Space or Any High-Risk Area Where a Gas Hazard Might Occur.



Downstream



Midstream



Upstream



Chemical  
Plants



Emergency  
Response



Underground  
& Vessels



Construction



## GENERAL AREA MONITORING

Place throughout your site during a high-risk operation or whenever you need additional detection.



## PERIMETER MONITORING

Cover an entire fence line or create smaller detection perimeters around a targeted work area.




## CONFINED SPACE MONITORING

Place detectors in a confined space for continuous monitoring, even in a Class 1, Division 1 (zone 0) location.

# The ALTAIR io360 Gas Detector Offers a Combination of Runtime and Sensor Performance, Unmatched in the Industry. No Compromises.

Most area monitors have runtimes measured in hours or days.

The ALTAIR io360 Gas Detector gives you *months*— in a hand held, compact design. You spend less time maintaining, more time monitoring.

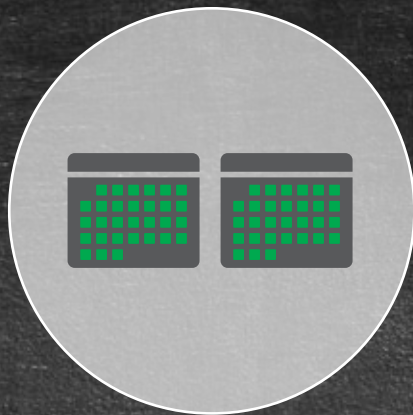

**50-60 DAYS**  
4 GAS

Catalytic Bead Combustible, O<sub>2</sub>, & CO/H<sub>2</sub>S



**80-85 DAYS**  
1-3 GAS

O<sub>2</sub> & CO/H<sub>2</sub>S

When batteries near end-of-life, respond proactively and minimize unplanned downtime... the ALTAIR io360 Gas Detector notifies you locally and remotely.

## Better Sensors Mean Better Performance.

### WITH MSA XCELL<sup>®</sup> SENSOR TECHNOLOGY, YOU GET:

The fastest response time.

Better stability and accuracy.

4 years of expected life for combustibile and toxic sensors.


End-of-life warning to minimize downtime.



ALTAIR io360 Gas Detector use XCell<sup>®</sup> Combustible and Toxic sensors


# The Rugged, Compact Design You Expect From MSA. With an IP68 Rating.

You work in tough environments. Your gas detectors need to work in them too.

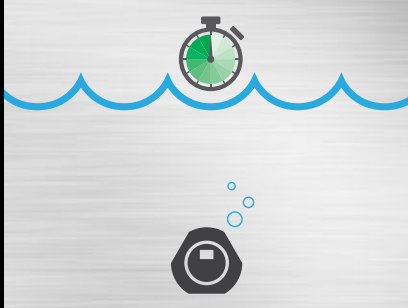

## SUBMERGE IT\*

6.6 ft. (2 m) for  
up to 60 minutes.

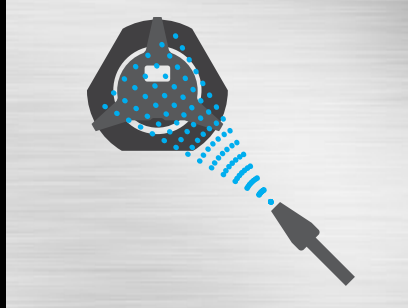

## SPRAY IT\*

Resistant to sprays.




## WEATHER IT\*

Withstands heavy rain,  
wind, and dust.




## STICK IT

50 lb. (220 Newton)  
force magnet.

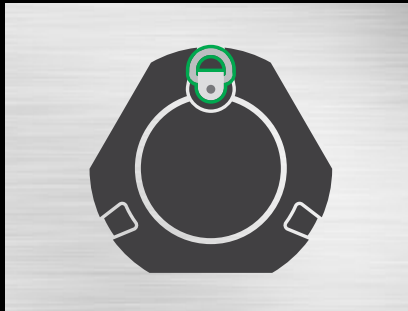

## HANG IT

Integrated D-ring.

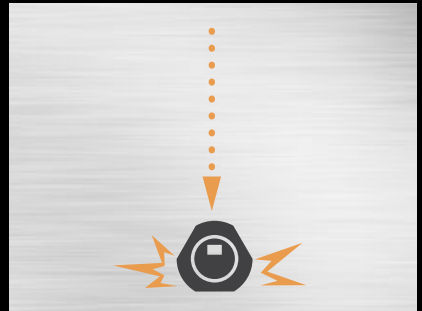

## DROP IT

Drop tested  
at 10 ft. (3 m).



## COMPACT

1.6 lb. (0.73 kg)  
No external antennas or battery packs.



## PORTABLE

Carry multiple detectors at a time. Make fewer trips  
when deploying. Save time and hassle.

\* consistent/pass with testing requirements of IP68.

## Specifications

### ALTAIR io360 Gas Detector Specification

<b>WARRANTY</b>	4 years <b>Oxygen Sensor:</b> 2 years <b>Low-energy Combustible:</b> 1 year		
<b>DURABILITY</b>	<b>Drop Test:</b> 10 ft. (3 m) <b>Ingress Protection:</b> IP68		
<b>TEMPERATURE</b>	<b>Normal Operating:</b> -4° to 131° F (-20° to 55° C) <b>Extending Operating:</b> -40° to 131° F (-40° to 55° C) <b>Storage:</b> 32 to +95 °F (0 to 35 °C)		
<b>HUMIDITY</b>	<b>Intermittent:</b> 5%–95% <b>Non-condensing:</b> 15%–90%		
<b>POWER</b>	<b>Batteries:</b> 3 replaceable lithium thionyl chloride batteries <b>Runtime:</b> nominally 50–60 days 4-gas, 80–85 days without combustible sensor		
<b>PHYSICAL</b>	<b>Weight:</b> 1.6 lb. (0.7 kg) <b>Dimensions:</b> 5.2" x 5.6" x 2.7" (132 x 142 x 69 mm)		
<b>ALARMS</b>	<b>Audible:</b> 90 dB @ 1 ft. (0.3 m) <b>Visual:</b> RGB LED		
<b>DATA LOGGING</b>	Periodic, Event, Instrument, Calibration logs stored on detector (at least 2 months) and sent to Safety io Grid.		
<b>RANGE</b>	Up to 1000 ft. (~300 m) line of site HUB to detector 2 mesh hops to extend range.		
<b>RADIO</b>	915 MHz, Bluetooth, RFID		
<b>SENSORS</b>	<b>Gas</b>	<b>Range</b>	<b>Resolution</b>
	LEL	0-100%	1%
	O <sub>2</sub>	0-30%	0.1%
	CO	0-1999 ppm	1 ppm
	H <sub>2</sub> S	0-200 ppm	1 ppm

### MSA HUB Specifications

<b>WARRANTY</b>	4 years
<b>DURABILITY</b>	Ingress protection IP67
<b>TEMPERATURE RANGE</b>	-4° to 140° F (-20° to +60° C) for hazardous locations
<b>HUMIDITY</b>	10 to 90% relative humidity, non-condensing
<b>POWER</b>	<b>Nominal:</b> 24 V DC line power <b>Range:</b> 6 V to 32 V
<b>PHYSICAL</b>	<b>Weight:</b> 3 lb. (1.4 kg) <b>Dimensions:</b> 7.5" x 7.7" x 3.9" (190mm x 195mm x 99mm)
<b>RADIO</b>	915 MHz, Bluetooth, 2.4 GHz Wi-Fi (a,b,g,n)
<b>ETHERNET</b>	10/100 mbit

## Certifications

### ALTAIR io360 Gas Detector Certifications\*\*

<b>UL (U.S.)</b>	
<b>DIVISION</b>	Class I, Division 1, Groups A, B, C, and D
<b>ATEX</b>	
<b>ZONE</b>	II 1G Ex da ia IICT4 Ga
<b>IEC</b>	
<b>ZONE</b>	Ex da ia IICT4
<b>General</b>	
<b>TEMPERATURE RATING</b>	T4, -40°C ≤ Ta ≤ +60°C

### MSA HUB Certifications\*\*\*

<b>QPS/CSA</b>	
<b>DIVISION</b>	Class I, Division 2, Groups A, B, C, and D
<b>ZONE</b>	Ex ec IICT4 Gc (Zone 2)
<b>ATEX</b>	
<b>ZONE</b>	II 3G ec [ic] IICT4 Gc
<b>IEC</b>	
<b>ZONE</b>	Ex ec [ic] IICT4
<b>General</b>	
<b>TEMPERATURE RATING</b>	-20°C ≤ Ta ≤ +60°C

\*\* CSA & Inmetro Pending

\*\*\* Inmetro Pending

Additional certification information available at [msasafety.com](http://msasafety.com).

## ENHANCE YOUR ALTAIR io360 GAS DETECTOR EXPERIENCE

safety<sup>io</sup> grid



### FLEET MANAGER

Assess, address, & share your MSA fleet status—all from your browser.



### LIVE MONITOR


Know what's going on—and take action—when seconds count.

For more information, please visit [safetyio.com](http://safetyio.com).

**This is the Future  
of Area Monitoring.**

**This is the ALTAIR io360  
Gas Detector.**

Both the detectors and the networks can be quickly and easily reconfigured for your changing needs.



**PRE-CONFIGURED KITS  
4, 8, 16, OR 32 ALTAIR io360 GAS DETECTORS  
+ 1 MSA HUB**

For users who want one configuration of gas detector. HUB and detectors are paired as a network, for ready, out-of-the-box experience. Detectors can be added, dropped, and/or reconfigured using the Safety io Grid mobile app.



**CUSTOM OPTIONS  
ANY NUMBER OF ALTAIR io360 GAS DETECTORS  
& MSA HUBS**

For users whose needs may change from job to job or who plan to have larger fleets. Order multiple detectors and HUBs, and easily construct networks with the Safety io Grid mobile app.

**ALTAIR io360 Gas Detector  
Basic Configurations\***

UL (U.S.) Configurations	Quantity	Color		
		Black	Green	
LEL, O <sub>2</sub> , CO/H <sub>2</sub> S	4 pack	10207176	10207459	
	Preconfigured Kits with MSA HUB	8 pack	10207456	10207438
		16 pack	10207467	10207460
		32 pack	10207452	10207439
	Single Detector	1 pack	10207181	10207442
H <sub>2</sub> S	4 pack	10207435	10207407	
	Preconfigured Kits with MSA HUB	8 pack	10207420	10207424
		16 pack	10207421	10207403
		32 pack	10207432	10207408
	Single Detector	1 pack	10207419	10207406

**Accessories\***

<b>10200411</b>	MSA HUB, ALTAIR io360, 915 MHz
<b>10195741-SP</b>	MSA HUB ethernet cable
<b>10205504</b>	Sunshield, io360

**Calibration\***

<b>10048890</b>	58 L, Methane 2.5%, O <sub>2</sub> -15%, CO-60 ppm, H <sub>2</sub> S-20 ppm
<b>10153845</b>	58 L, H <sub>2</sub> S-20 ppm
<b>467895</b>	Fixed flow regulator

**Replaceables & Spares\***

<b>10201430</b>	Replacement kit, battery, 3 pack, io360
<b>10201438</b>	Sensorshield, replacement, io360
<b>10201439</b>	Cap, calibration, replacement, io360
<b>10203709</b>	Replacement kit, combustibile sensor, io360
<b>10203721</b>	Replacement kit, comb-evo sensor, io360
<b>10203724</b>	Replacement kit, O <sub>2</sub> sensor, io360
<b>10203710</b>	Replacement kit, CO/H <sub>2</sub> S sensor, io360
<b>10201433</b>	Replacement kit, horn, io360
<b>10201434</b>	Replacement housing front, black, io360
<b>10201435</b>	Replacement housing back, black, io360
<b>10205505</b>	Replacement housing front, green, io360
<b>10205506</b>	Replacement housing back, green, io360
<b>10201437</b>	Replacement kit, screws, io360
<b>10205507</b>	ALTAIR io360, sensor plug kit
<b>10195720-SP</b>	MSA HUB AC cord, NA (type B)
<b>10208430-SP</b>	MSA HUB AC cord, CH (type L)
<b>10208431-SP</b>	MSA HUB AC cord, AR (type I)

\*Need something different? Visit [www.msasafety.com](http://www.msasafety.com) or Contact MSA for more options.

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](http://MSAsafety.com/offices).