


MULTI-CARTRIDGE BAND-CLAMP FILTER HOUSINGS

QFP Series Band Clamp Filter Housings

are designed for Commercial and Industrial liquid filtration applications. These multi-cartridge filter housings are available in 4, 5, 7, 12 or 22 round configurations for flow rates up to 660 GPM. Housings are available in your choice of 304 or 316 poly-coated stainless steel. Universal seal cups and compression plates allow for use of DOE, 222/Flat or 222/Fin style cartridges.

Features:

- Heavy Duty 304 or 316 Stainless Steel Construction
- External Poly-Coat Finish
- Easy Access Band Clamp Closure
- Welded on Mounting/Support Legs
- Gauge/Drain & Vent Ports Standard
- Accepts DOE, 222/Flat or 222/Fin Style Cartridges
- Adjustable Top Plate with spring seal assemblies
- Buna O-Ring
- 150 PSI Maximum Pressure
- 250° F Max Temperature
- Manufactured in the USA

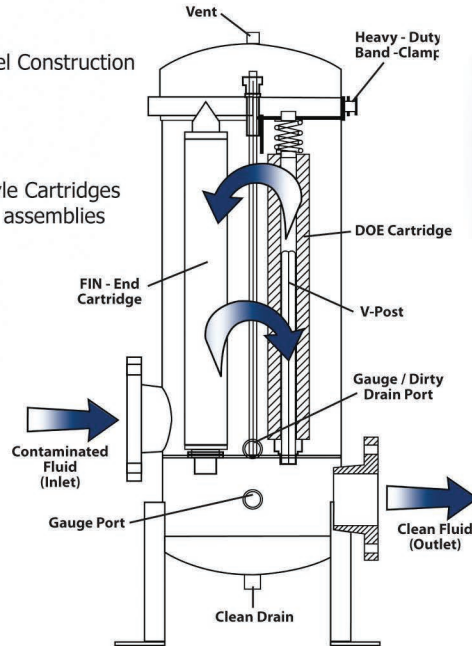

304SS Part #	316SS Part #	# of Cartridges	Cartridge Length	In/Out	GPM- Depth Cartridge	GPM-Pleated Cartridge
QFP4X1-304	QFP4X1-316	4	10"	2" MNPT	20	30
QFP4X2-304	QFP4X2-316	4	20"	2" MNPT	40	60
QFP4X3-304	QFP4X3-316	4	30"	2" MNPT	60	90
QFP4X4-304	QFP4X4-316	4	40"	2" MNPT	80	120
QFP5X1-304	QFP5X1-316	5	10"	2" MNPT	25	38
QFP5X2-304	QFP5X2-316	5	20"	2" MNPT	50	75
QFP5X3-304	QFP5X3-316	5	30"	2" MNPT	75	115
QFP5X4-304	QFP5X4-316	5	40"	2" MNPT	100	150
QFP7X3-304	QFP7X3-316	7	30"	2" MNPT	105	150
QFP7X4-304	QFP7X4-316	7	40"	2" MNPT	140	200
QFP12X3-304	QFP12X3-316	12	30"	3" Flange	180	270
QFP12X4-304	QFP12X4-316	12	40"	3" Flange	240	360
QFP22X3-304	QFP22X3-316	22	30"	4" Flange	330	500
QFP22X4-304	QFP22X4-316	22	40"	4" Flange	440	660

* Flow rates are for guidelines only. Actual flow rates vary based on micron rating, cartridge type, solids loading and other factors.



Quantrol Inc. 9001 Hanslik Court, Naperville, IL 60564
Phone: (630) 355-3330 Fax: (630) 355-3568 www.quantrol.net