


ITEM - FRCH  
 FRANKLIN ROCKER



This Item can be found on  
[www.OutdoorFurniturePlus.com](http://www.OutdoorFurniturePlus.com)

Call 877-595-8543 to order.

OXFORD GARDEN

About Shorea Wood

Shorea is a tropical hardwood that is comparable to teak. Because of its high oil content it is resistant to rotting, bug infestation, and the effects of wind, rain, sun, and snow. If left untreated shorea weathers naturally to a beautiful silver gray color. Some surface roughness may develop, especially at the end grain, but over a period of about one year, the natural weathering process will stabilize. Moderate checking in the grain is normal with exposure to the elements. Small surface cracks that may appear in no way affect the structural integrity of the furniture. As weather conditions and temperatures fluctuate these small cracks may expand and contract.

Wood Care Instruction

To prevent the staining of concrete or tile the furniture should be rinsed well after assembly to remove dust that might remain from the manufacturing process. Although shorea weathers well we recommend a routine application of teak oil or Cabot's Australian Timber Oil in extremely dry climates. A routine oiling is also recommended for furniture to be used for dining purposes to discourage staining from food and drink spills.

For seasonal cleaning rinse the furniture well and then scrub (using a sponge or soft bristle brush) with a mild solution of water, laundry detergent and a little bleach. Rinse with fresh water.

To restore the original wood color, Oxford Garden suggests applying Cabot's Australian Timber Oil or any high quality teak oil after cleaning. Test in an inconspicuous spot first, to approve the color. Application of oil is at the customer's discretion and is not covered by the warranty. Paint or any products with polyurethane are not recommended, as application of these products will void the warranty as well.

For additional information regarding our warranty, please visit [www.oxfordgarden.com](http://www.oxfordgarden.com)

Tools (included)

Wood Glue  
 QUANTITY: 1



Wood Glue Brush  
 QUANTITY: 1




Components

① Right Arm Assembly  
 QUANTITY: 1



② Left Arm Assembly  
 QUANTITY: 1



③ Right Rocker  
 QUANTITY: 1



④ Left Rocker  
 QUANTITY: 1




⑤ Seat  
 QUANTITY: 1



Components

⑥ Back  
 QUANTITY: 1



⑦ Front Seat Rail  
 QUANTITY: 1



⑧ Back Seat Rail  
 QUANTITY: 1



Hardware

A Dowel  
 QUANTITY: 22



B Wood Screw  
 QUANTITY: 4



Finishing Items (included)

Medium Grit Sandpaper

NOTE: A hammer (not provided) will be needed for the assembly of this bar chair.

NOTE: If the furniture is going to be placed on concrete or tile patio, it should first be rinsed well to remove the sawdust that may cause some staining.

GLUING INSTRUCTIONS:

Correct assembly of this chair requires glue to be applied to the final assembly joints using the supplied glue. To properly glue these joints follow the directions below:



a. Lay the assembly part flat and apply a liberal amount of glue into the mortise using the brush and glue supplied. Use the brush to make sure the glue is thick on the inside walls of the mortise.

b. Apply a liberal amount of glue to the complete tenon using the brush to make sure the glue has contact with the entire tenon.

c. Assemble the parts as instructed in the instruction steps. After assembling the glued parts, use a damp cloth or sponge to clean up any excess glue from the outer surface of the furniture.


## Step 1 \* Apply glue in this step. (See pg.1 for instruction.)

Apply wood glue provided and attach the left rocker ④ to the left arm assembly ②.

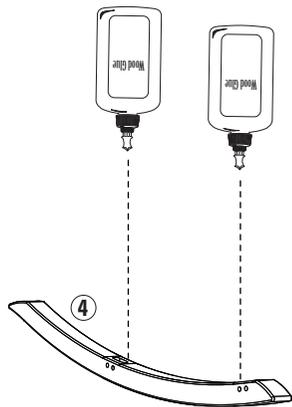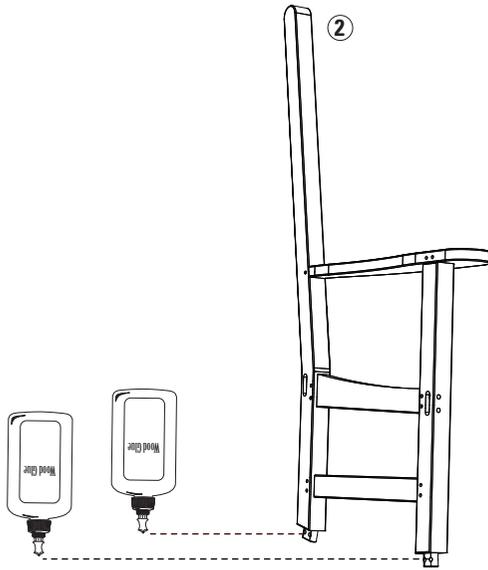


## Step 2

Attach the rocker then secure it by hammering two dowels ① into each joint. After the glue has set for at least 30 minutes but before it hardens, clean the excess glue from the joint with a clean cloth or knife.

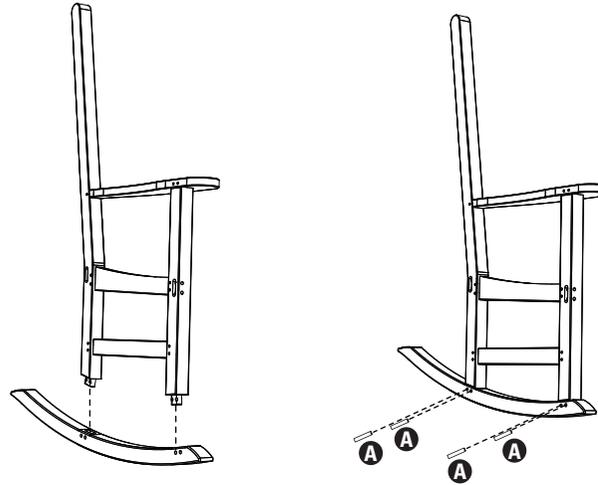


## Step 3

On a clean flat surface, lay left arm assembly flat on the ground. With mortise holes facing up, insert back assembly ⑥ into arm assembly. NOTE: The top of the back is marked and should be placed at the top of the chair.

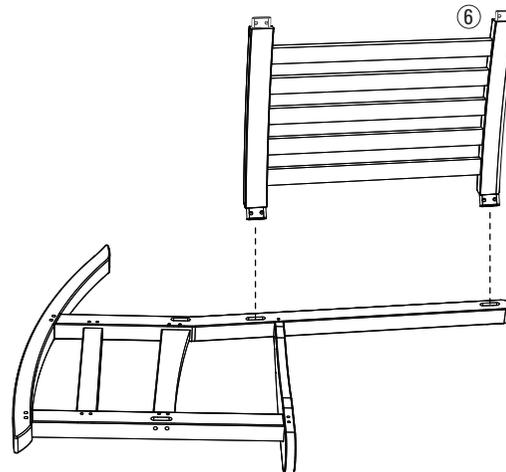


## Step 4

Insert the back seat rail ⑧ into arm assembly. NOTE: The back rail is shorter than the front rail. The tenons of both rails are angled. Position the rails so that the tenons point to the back of the rocker.

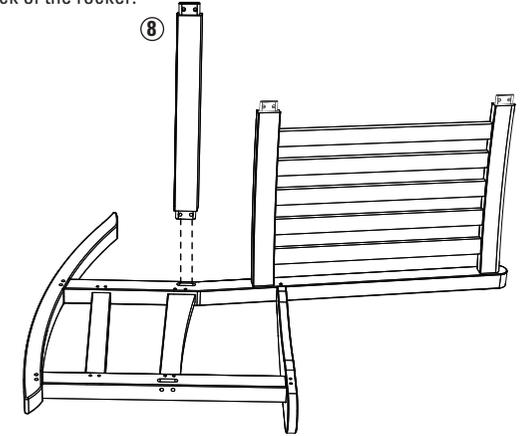


## Step 5

Insert front seat rail ⑦ into arm assembly.

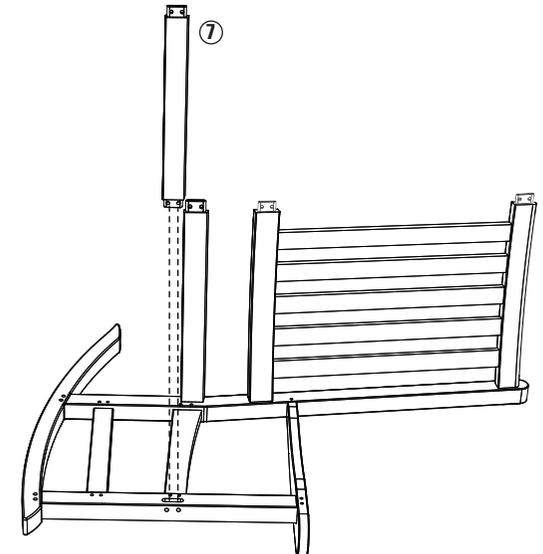


**Step 6**

Put seat assembly ⑤ into place, keeping the leg notches to the front of the chair, and the rounded arch to the back.

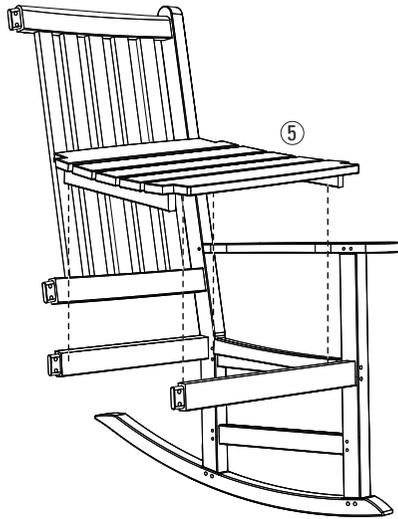


**Step 8**

Drive 16 wood dowels A into place, with the tapered end first.

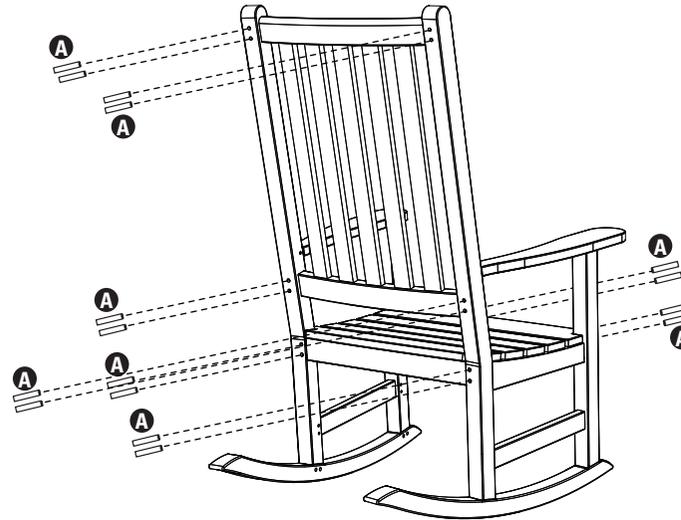


**Step 9**

Secure seat with 4 wood screws B.

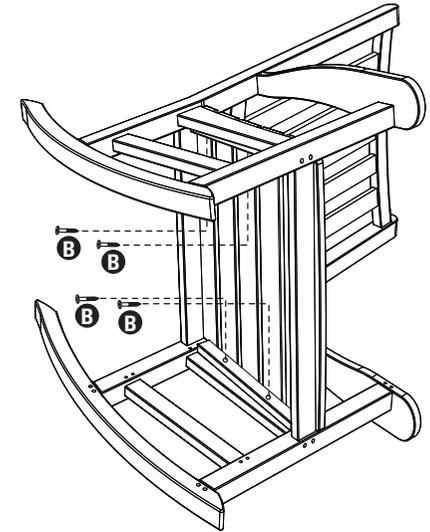


**Step 7**

Repeat Steps 1 and 2 for the right arm ① and then attach the right arm assembly to the rest of the assembled parts.

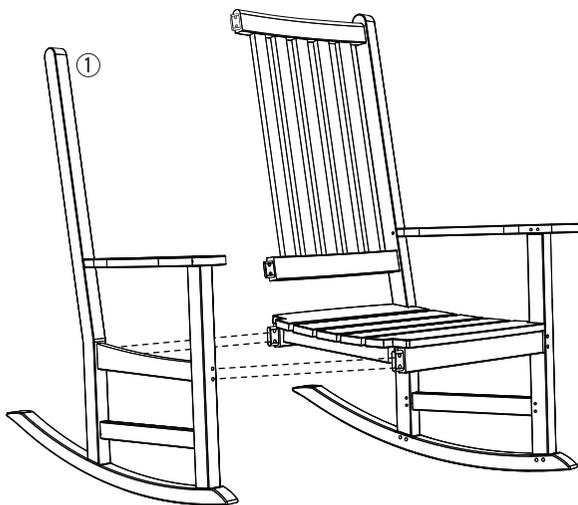

**Step 8 (front view detail)**

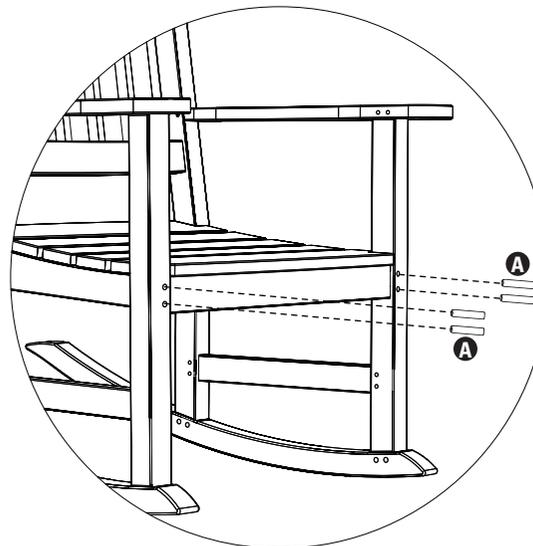

**Step 9 (detail)**

Repeat Step 9 for both the left and right side.

