

COMBINATION INSTALLATIONS

Document # PGCI - 015

Revised 09/28/09 Page 1/1



Drop-In Cooktop/ Warming Drawer


PLANNING GUIDE



WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

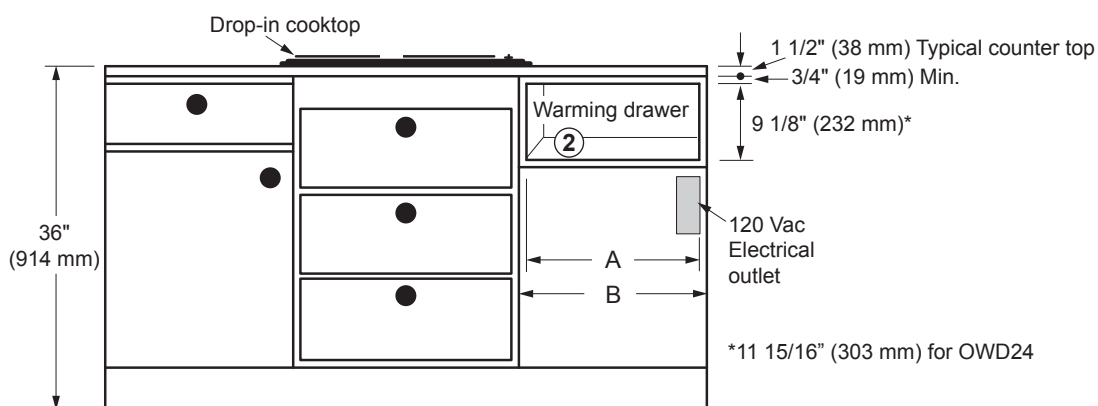

DROP-IN COOKTOP WITH WARMING DRAWER

Models	(A) Cabinet Cutout Width	(B) Min. Cabinet Width**
24"	22 1/2" (572 mm) 22 5/8" (575 mm) for OWD24	24 1/4" (616 mm)
27"	25 1/2" (648 mm)	27 1/4" (692 mm)
30"	28 1/2" (724 mm)	30 1/4" (768 mm)
36"	34 1/2" (876 mm)	36 1/4" (921 mm)

**Spacing may vary for warming drawers with a custom front panel. See warming drawer installation instructions.



NOTES:

1. 4" (610 mm) minimum interior cabinet depth (20 1/8" for model OWD24).
2. 3/4" (19 mm) support platform (flush with cutout).
3. See individual appliance planning guide pages for overlay dimensions.
4. Spacing shown is the bare minimum required for ventilation and to prevent scraping of doors and drawers. Additional spacing may be required for appearance.
5. Model OWD24 is not approved for installation adjacent to a wall oven.