36” 5-Burner Gas on Glass Cooktop

KM 3054 G/LP

36” 5-Burner Gas on Glass Cooktop
KM 3054 G/LP

KM 3054 G/LP
Features:

- 5 sealed burners (max output):
  (1) 16,500 BTU Super (Wok) burner
  (1) 9,300 BTU High-speed burner
  (2) 5,800 BTU Normal burners
  (1) 3,750 BTU Auxiliary/Simmer burner
- ‘Gas on Glass’ design for easy cleanability
- Center control panel with stainless steel knobs
- QuickStart – No need to press or hold the control: convenient rotary electronic controls switch burners on
- GasStop & Restart – Automatic re-ignition should the flame go out. If unsuccessful, the gas supply is turned off immediately for safety
- Indicator lights
- Timer
- ComfortClean dishwasher-safe grates

SPECIFICATIONS	
KM 3054 G - Item 26305450USA **KM 3054 LP -** Item 26305451USA	
Unit Width	37 1/16” (942 mm)
Unit Height (To Gas Connection)	2 13/16” (71 mm)
Unit Depth	20 11/16” (526 mm)
Niche Dimensions	
Cut-out Dimensions	36 1/16” (916 mm) W x 19 5/16” (490 mm) D
Minimum Back Spacing From Wall	2” (50 mm)
Minimum Countertop Thickness	1 1/8” (29 mm)
Minimum Recommended distance to ventilation hood	30” (760 mm)
Gas Burners	
Auxiliary Burner	3,750 BTU (G), 3,300 BTU (LP)
Normal Burner	5,800 BTU (G), 6,400 BTU (LP)
High-Speed Burner	9,300 BTU (G), 9,800 BTU (LP)
Wok Burner	16,500 BTU (G), 15,000 BTU (LP)
Total Maximum BTU Output	41,150 BTU (G), 40,900 BTU (LP)
Gas	
Gas Connection	1/2” NPT
Maximum Gas Supply Pressure	Natural Gas - 14” WC (34.9 mb), 1/2 psi (3.5 kPa) LP Gas - 14” WC (34.9 mb), 1/2 psi (3.5 kPa)
Minimum Gas Supply Pressure	Natural Gas - 6” WC (15 mb) LP Gas - 10” WC (25 mb)
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 A
Power Cord	NEMA 5-15P, 4 ft (1.2 m)
Shipping	
Shipping Weight	54 lbs (24.5 kg)
Shipping Dimensions	41 3/8” W x 8 5/8” H x 25 1/2” D
Support	
Call	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com

PRODUCT VIEWS

Top View

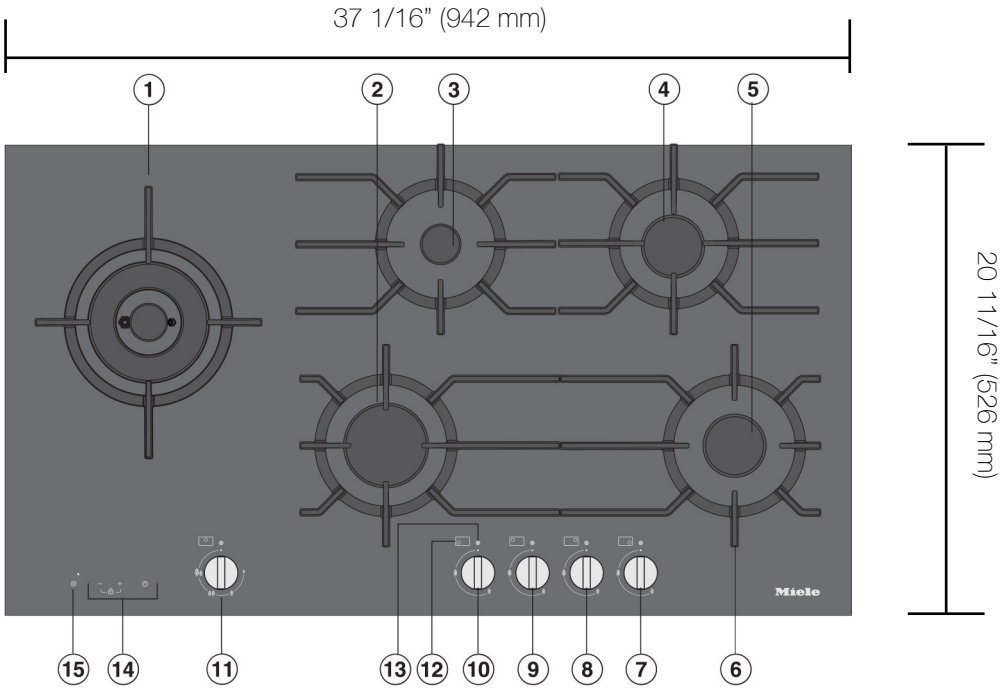

① Wok burner
② Fast burner
③ Auxiliary burner
④⑤ Normal burner
⑥ Grates (for each burner)

⑫ Burner symbol
⑬ Operating/Residual heat indicator
⑭ Timer
⑮ Quick switch-off

Control knob
⑦ Front right burner
⑧ Rear right burner
⑨ Rear left burner
⑩ Front left burner
⑪ Left burner

INSTALLATION DIMENSIONS

Cooktop Top

Countertop Cut-Out

Cooktop Bottom

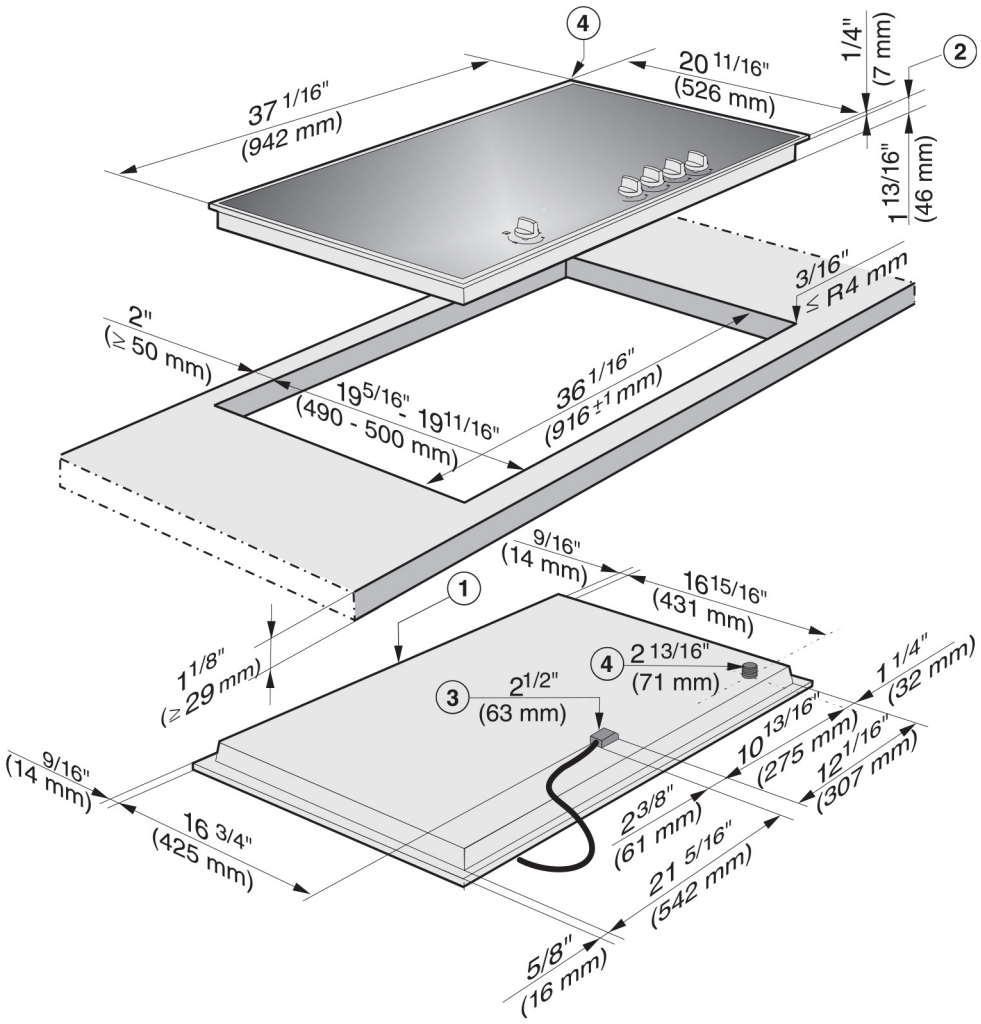

① Appliance front

② Installation height

③ Power supply box with connection cable L = 4 ft (1.2 m)

④ Gas connection

KM 3054 G/LP GAS ON GLASS COOKTOP INSTALLATION IN COMBINATION WITH UNDERCOUNTER 30” MIELE OVEN H6x80BP

Countertop Thickness vs. Toekick Height
Taken into consideration:

- 34 1/2” tall cabinetry
- Gas pressure regulator mounted on back wall or in adjacent cabinetry
- 90 degree street elbow used on bottom of cooktop
- 1/4” of cooktop above countertop (proud)
- 3/4” (exact) platform thickness under oven/above toekick

Countertop Thickness	Toekick Height									
	3 1/2	3 3/4	4	4 1/4	4 1/2	4 3/4	5	5 1/4	5 3/4	6
1 1/8	OK	NA	NA	NA	NA	NA	NA	NA	NA	NA
1 1/4	OK	OK	NA	NA	NA	NA	NA	NA	NA	NA
1 1/2	OK	OK	OK	NA	NA	NA	NA	NA	NA	NA
1 3/4	OK	OK	OK	OK	NA	NA	NA	NA	NA	NA
2	OK	OK	OK	OK	OK	NA	NA	NA	NA	NA
2 1/4	OK	OK	OK	OK	OK	OK	NA	NA	NA	NA

= Typical Installation