MPRE424

24" REFRIGERATOR





BrightShield protects against viruses, bacteria, mold and mildew.

MARVEL PROFESSIONAL COLLECTION



MAIN FEATURES

- Models with BrightShield[™] antimicrobial lighting create a more hygienic environment for foods and beverages
- 5.5 cu ft. capacity stores up to 20 wine bottles or 162 cans (12-oz)
- Upper zone features 3-in-1 Glide-Out Convertible Shelf with removable glass pane to convert to wine rack
- · Half-width shelf allows for tall item storage
- Cantilevered shelving system can hold up to 35 lbs and features 11 adjustable heights
- · MaxStore bin stores loose items
- Dynamic cooling technology delivers rapid cool down, frostfree operation, and temperature stability
- Argon-filled, UV-resistant tinted dual pane glass door options protect contents
- Digital controls allow you to select a temperature from 33°F to 70°F
- Door ajar and high/low temperature alerts
- Adjustable LED theater-style lighting in arctic white or sapphire blue (non-BrightShield models)
- · Elegant midnight black interior
- Professional styling: Robust full-length handle and stainless steel accents
- · Reversible soft-close door allows for right or left swing
- · Door lock provides added security
- Panel ready model requires 3/4" or 5/8" custom panel and handle (not supplied by Marvel)

WARRANTY

 3-year parts and labor warranty with product registration and 5-year sealed system parts warranty (see complete warranty for details)

FINISH OPTIONS



DOOR STYLE	MODEL NUMBER
Stainless Steel Frame Glass	MPRE424-SG31A
Panel Ready Frame Glass	MPRE424-IG31A
Solid Stainless Steel	MPRE424-SS31A
Solid Panel Ready	MPRE424-IS31A

BRIGHTSHIELD™ MODELS	MODEL NUMBER
Stainless Steel Frame Glass	MPRE424-SG81A
Panel Ready Frame Glass	MPRE424-IG81A
Solid Stainless Steel	MPRE424-SS81A
Solid Panel Ready	MPRE424-IS81A

















DIMENSIONAL DRAWINGS

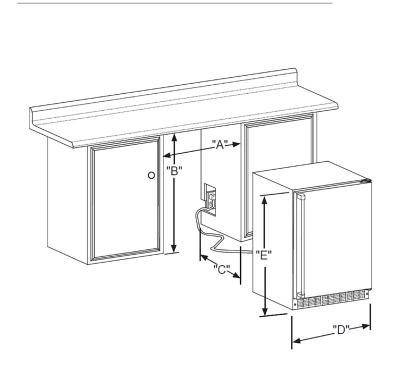

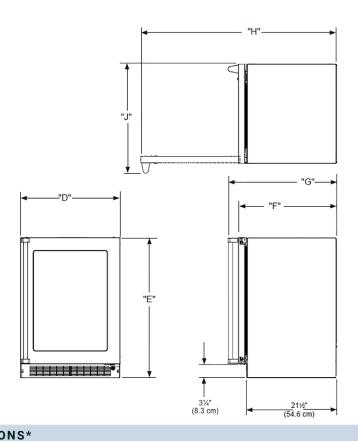

ROUGH	N DIMENSIONS*		CABINET DIMENSIO			
"A"	"B"	"C"	"D"	"E"		
24"	34" to 35"	24"	23-7/8"	33-3/4" to 3		
(61 cm)	(86.4 cm to 88.9 cm)	(61 cm)	(60.7 cm)	(85.7 cm to		

"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"
24"	34" to 35"	24"	23-7/8"	33-3/4" to 34-3/4"	23-5/8"*	26-1/8"*	47-3/4"*	26-3/8"*
(61 cm)	(86.4 cm to 88.9 cm)	(61 cm)	(60.7 cm)	(85.7 cm to 88.3 cm)	(60 cm)	(66.4 cm)	(121.3 cm)	(67 cm)

^{*}Stainless steel model dimensions only. For panel-ready models, see the owner's guide online at marvelrefrigeration.com.

PRODUCT SPECIFICATIONS

Capacity 5.5 cu. ft. **Cord Length** 6 ft.

Electrical Requirements 115V / 60 Hz / 15A

ENERGY STAR Yes

Panel Height

30-7/16" (77.3 cm)

Panel Thickness 5/8" (1.6 cm) or 3/4" (1.9 cm)

Panel Type 2-3/4" (7 cm) Frame Panel or Solid Panel

Panel Width 23-5/8" (60 cm)

Refrigerant Type R600a Sabbath Mode Yes **Shipping Dimensions**

28" W x 31" D x 37" H

Shipping Weight

160 lbs

Temperature Range

33°F to 70°F

For comprehensive installation instructions, including panel overlay details, please visit marvelrefrigeration.com to access the owner's guide. All specifications are subject to change without notice.

MARVEL