



Black Solid



White Solid



Stainless Solid

Key Features

- Refrigerator volume of 2.1 cu ft holds up to 24 bottles (12 oz) or 44 cans (12 oz)
- Digital touch pad controls
- Temperature range: 34°F - 45°F
- Produces and stores up to 8 lbs of ice per day
- Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L
- No drain required
- Two removable tempered glass shelves
- Two fixed storage compartments in door
- Door swing is field reversible, and is shipped right-hand hinged
- Built-in or freestanding


Model Details

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UARI121-SS01A	115 / 60	Field Reversible	Stainless Solid	101 lb
UARI121-BS01A	115 / 60	Field Reversible	Black Solid	101 lb
UARI121-WS01A	115 / 60	Field Reversible	White Solid	101 lb

Accessories

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided water supply line kit	N/A	2 lb




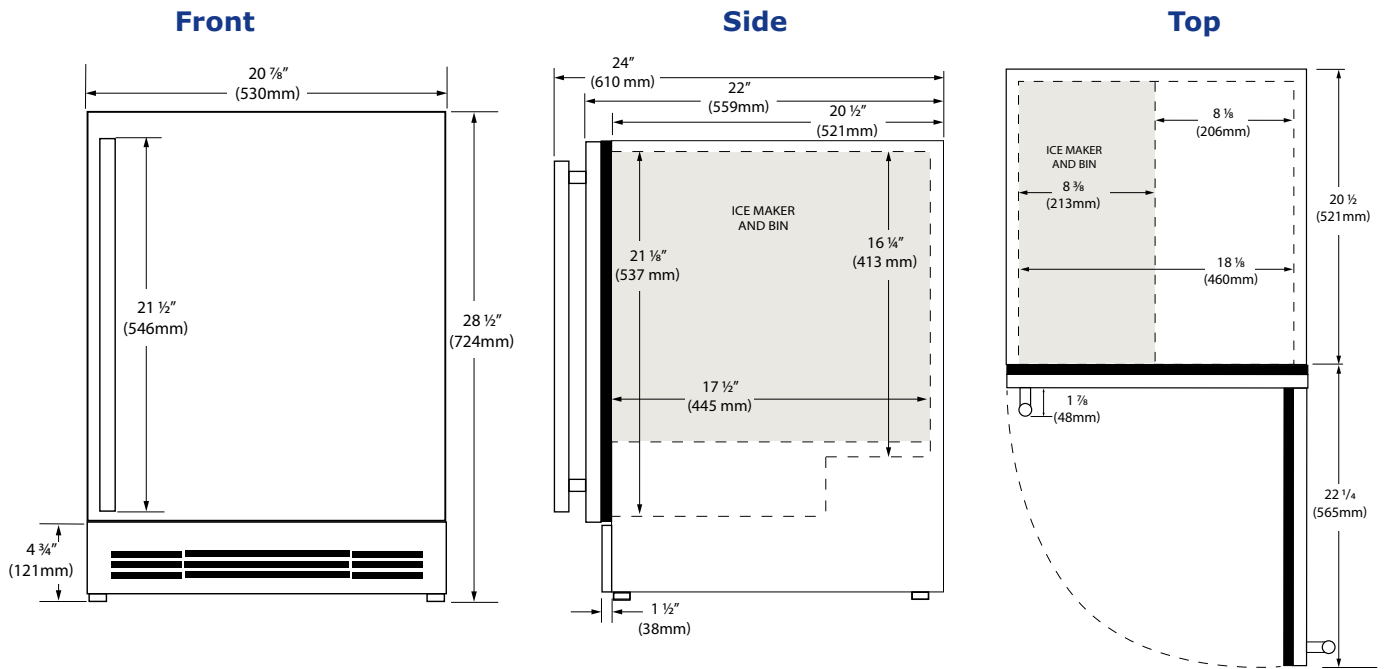


Specifications

Model	ARI121
Amps: Running	2.5
Capacity: Bottle (12 oz)	24
Capacity: Can (12 oz)	44
Capacity: Refrigerator Volume (cu ft)	2.1
Defrost Type	Frost Free
Dimensions: Product Depth	22" / 559 mm
Dimensions: Product Height	28 1/2" / 724 mm
Dimensions: Product Width	20 7/8" / 530 mm
Energy Consumption: Avg. Per Year	565 kWh
Ice Production Per Day	8 lb
Ice Storage	8 lb
Panel Thickness	1/4" (6.3 mm)
Product Weight: Max	92 lb
Refrigerant Type	R600a
Sabbath (Star K Certified)	No
Temperature Range	34°F - 45°F

Back

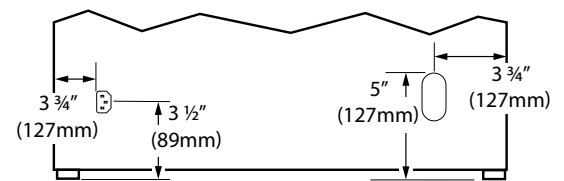

Cabinet Cut-Out

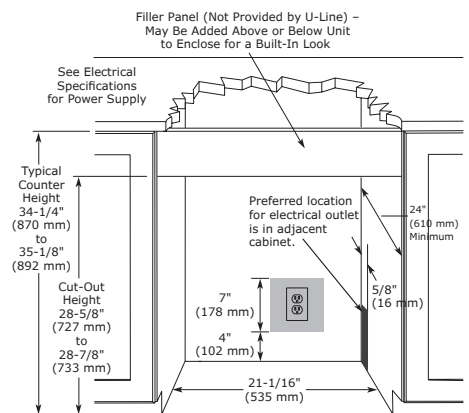

Installation Notes

- When installing a left-hand hinge model, allow for 145° door swing for proper removal of ice bin.
- No additional clearance around sides, top or rear of unit is needed for ventilation.
- Do not obstruct front grille air flow

Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**



See complete warranty for details

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.