24” C-SERIES WINE RESERVE

HC24WB-3 24” INDOOR MODEL

Glass Door Model

Solid Door Model

GENERAL C-SERIES FEATURES

- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and black vinyl clad exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- **Industry Exclusive** full extension wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Interior lighting and digital control
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HC24WB FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes five (5) full-extension wine shelves to accommodate 40 wine bottles (based on 750 ml., 3” diameter bottles)
- Wine shelves feature stainless steel fronts
- Shelves are removable and adjustable to accommodate oversized/magnum bottles
- Cabinet construction eliminates vibration transfer to reserve
- Wine Reserve temperature 45°- 65°F

ACCESSORIES

(L)	Factory Installed Lock
66736	Caster Kit for HP24/HC24/HA24 models
67115-24	Wood Faces for Wine Shelf (7/pk)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit **perlick.com/residential**

FORM NO. Z2529
REV. A-06/12/2018

8300 W. Good Hope Rd. • Milwaukee, WI 53223 • (800) 558-5592 • Fax: (414) 353-7069 • perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.

PRODUCT SPECIFICATIONS

Overall Width	23-7/8” (60.64 cm.)
Overall Height	34-1/4” (86.96 cm.)
Overall Depth	24” (60.96 cm.)
Opening Width	24” (60.96 cm.)
Opening Height	34-3/8” (87.31 cm.)
Opening Depth	24” (60.96 cm.)
Refrigerated Volume	5.2 cu. ft.
Door Swing Clearance	25” (63.5 cm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	N/A
Shipping Weight	195 lbs (88.45 kg.)

INDOOR MODELS

HC24WB-3-1L*	Stainless steel solid door, hinge left
HC24WB-3-2L*	Panel ready solid door, hinge left
HC24WB-3-3L*	Stainless steel glass door, hinge left
HC24WB-3-4L*	Panel ready glass door, hinge left

** Also available hinge right (R)*

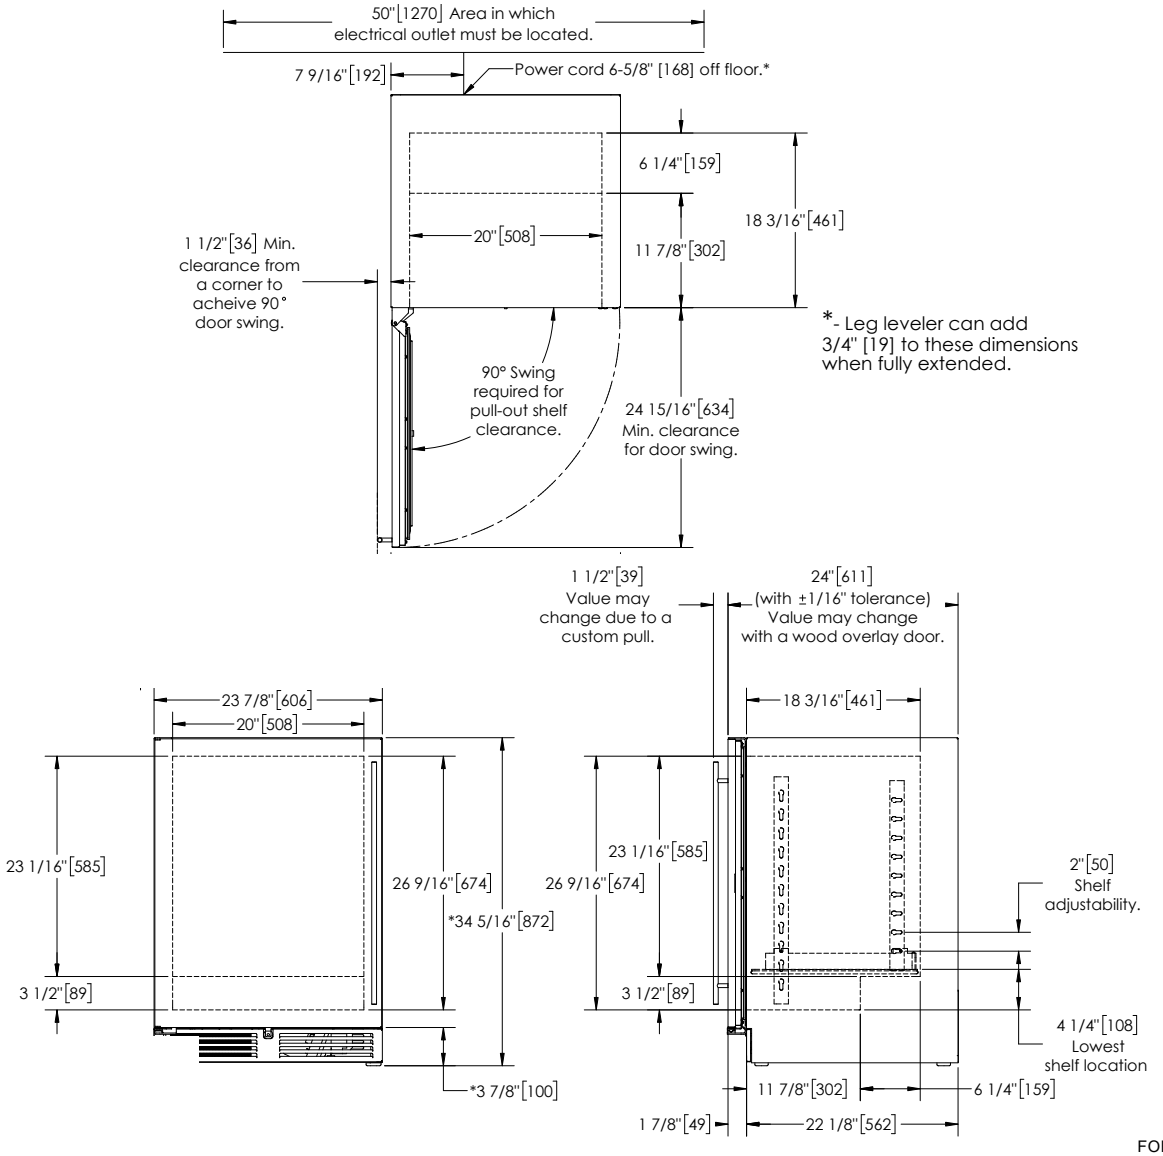

FORM NO. Z2529
REV. A-06/12/2018

8300 W. Good Hope Rd. • Milwaukee, WI 53223 • (800) 558-5592 • Fax: (414) 353-7069 • perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without warning.