


7812 SERIES | TASK CART

Fluorescent Explosion Proof Task Cart

**EXPLOSION
PROOF
LIGHTING**

April 2017

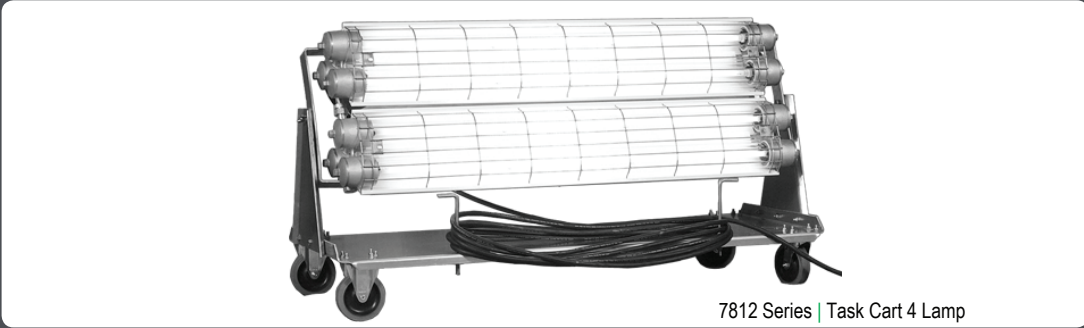

7812 Series | Task Cart 4 Lamp

APPLICATIONS

- Hazardous Locations
- Paint Inspection Areas
- Laboratory Applications
- Corrosive Environments
- Aircraft Hangars
- Maintenance Pits

The **7812 Series | Task Cart** turns a typical mounted Fluorescent Explosion Proof light into a portable light giving it versatility and movement. The **7812 Series - Fluorescent Explosion Proof Task Cart** is manufactured in accordance with applicable NFPA standards. For use in hazardous environments and laboratory applications. Portable lighting solutions for hazardous atmospheres.



7812 Series | Task Cart 2 Lamp

Specifications

FIXTURE LISTINGS: UL listed 844 U.S. and Canada for hazardous locations
UL listed 1598 U.S. and Canada for wet locations
UL listed 1598A U.S. and Canada for marine locations



FEATURES: For either 2,3 or 4-lamp 4 foot fixture
5" non-sparking casters (1 pair fixed, 1 pair swivel)
360° non-continuous adjustable fixture rotation
Lamps, polycarbonate shield and stainless steel guard: ALL INCLUDED

ELECTRICAL: Available in 28, 32, 34, 44, 54 and 60 watt with T5, T5HO, T8 and T8HO lamps
Voltages: 120
50 Ft. of S.O. electric cable suitable for rough duty use
Explosion proof switch
Explosion proof plug - 120 Volts (P/N 3825)


HOUSING: Frame constructed of corrosion resistant aluminum

REFLECTOR: One piece aluminum reflector


LENS: Clear tempered glass tubes, polycarbonate shield.

MOUNTING: Fixture mounted to 360° (non-continuous) adjustable rotating brackets

OPTIONS: 2 lamp model
3 lamp model
4 lamp model

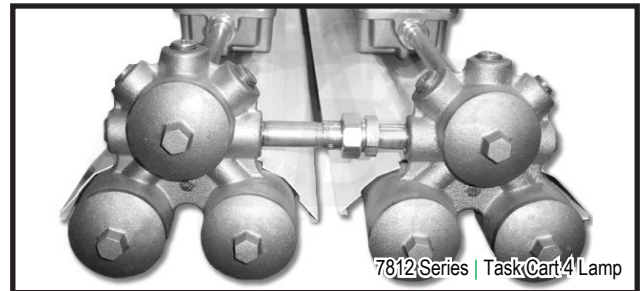

7812 Series | Task Cart 4 Lamp

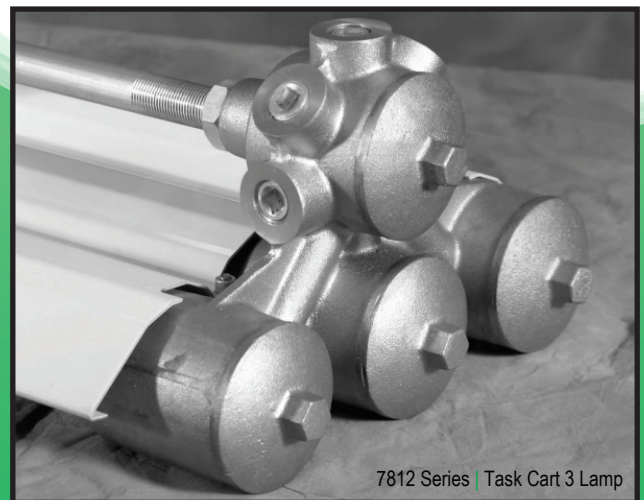

7812 Series | Task Cart 3 Lamp



Western Technology, Inc. | Toll Free: (800) 654-5483
3517 Arsenal Way | Local: (360) 917-0080
Bremerton, WA 98312 | Fax: (360) 917-0083
www.WesternTechnologyLights.com

7812 SERIES | TASK CART

Fluorescent Explosion Proof Task Cart



April 2017

CART	SERIES	LAMP TYPE	LAMP QTY	LENGTH	VOLTAGE	OPTIONS
2 Lamp cart 3 Lamp cart 4 Lamp cart	7812	T5** T5HO* T8* T8HO**	2: 2 Lamps 3: 3 Lamps 4: 4 Lamps	4: 4 Ft.	120: 120V	HB: 93% Reflective specular reflector insert

Notes:

*5000K lamp standard for T5HO and T8 lamps
 **4100K lamp standard for T8HO and T5 lamps
 All T5, T5HO and T8 are universal voltage
 3 lamp fixtures not available in T8HO

LAMP WATTAGES




4 Ft. Lamp	Wattage
T5	28W
T5 H.O.	54W
T8	32W
T8 H.O.	44W

DIMENSIONS


2, 3 and 4 Lamp Cart

- A — 58"
- B — 24"
- C — 24 3/4"
- D — 27 5/8"
- E — 29 9/16"


Note: Western Technology, Inc. recommends consulting local authorities for approval of your application prior to purchase.

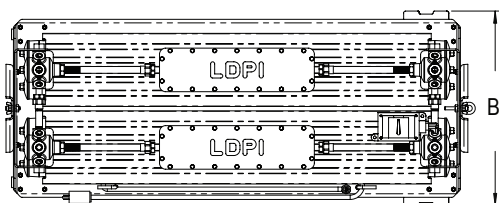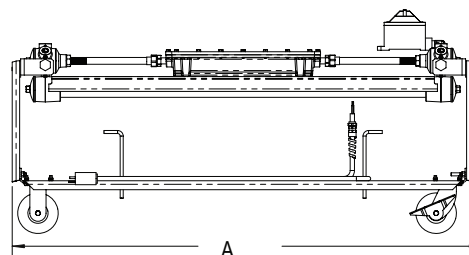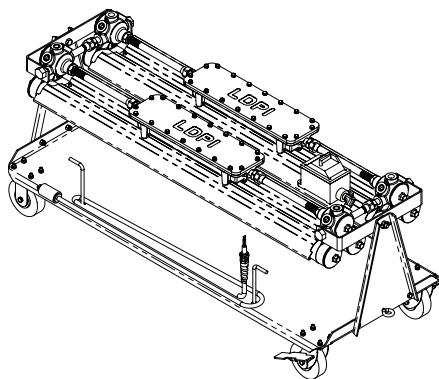


4 LAMP

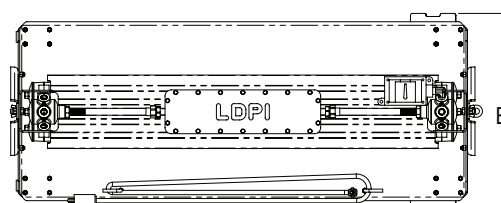


2 LAMP

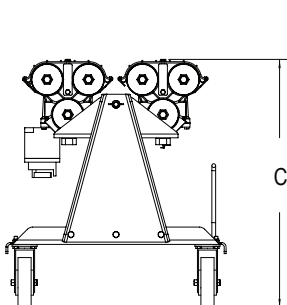

C

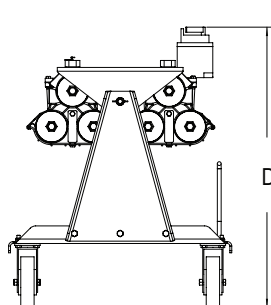

D

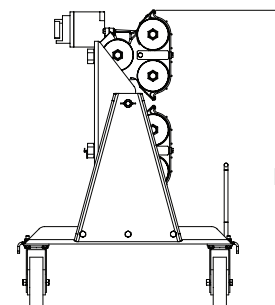

E