



45362 HIGH OUTPUT SQUARE FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

2 7/8"

Box

WATTS

LUMENS

PROJECT:			
TYPE:			
DATE:			
NOTES:			



2700K . 3000K . 3500K . 4000K . 5000K

CRI

DIMMABLE

BEAM

ANGLE

ADJUSTABLE

SPECIFICATIONS

LIGHT HOUSING

2″

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

• Cut hole: ø2 7/8".

• Fixture: ø3 1/8" x 5 1/8"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver
- enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K |30K |35K
- Delivered Lumen: 875 lm |932 lm |1027 lm |1068 lm |1041 lm

|40K

|50K

CERTIFICATIONS




ORDERING GUIDE

MODEL	FINISH		
45362-026	Black		
45362-019	White		



KELVIN

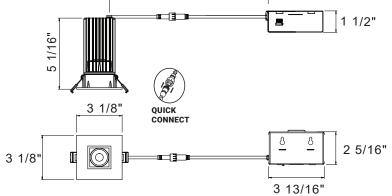

ACCESSORIES





45363-016 NEW CONSTRUCTION SMASH PLATE 13 1/4" x 6 1/2" ø2 3/4″



All features, functionality and other product specifications are subject to change without notice.