



WWW.CORONALIGHTING.COM

1633 Staunton Ave
Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957

(213) 747-4500 (213) 747-3234

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-131B-GM

•Down Lights

• Cast Brass

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.
Shroud is adjustable and extendable.

Finish: **GM- Gun Metal.** Natural toning process.
GM finish will vary due to artistic process.
Also available in **AB** finish.

Lens: Clear and heat resistant tempered flat glass.

Socket: Top grade fixed ceramic bi-pin socket, with lamp
retension clip to securely hold lamp in place.

Lamp: 12V, MR-11 halogen 35W max. Standard
L-FTB-C20 (20w). 2.5W lamp LED lamp also
available. See lamp guide below for more information.

Wiring: Fixture is prewired with a 5-ft 18-2 SPT2-W direct
burial cord. Wire connector available separately.
Universal connector (**CX-839**) or silicone filled wire
nut (**CX-854**) may be ordered to Corona Lighting.


Gasket: Silicone gasket for water tight sealing.

Knuckle: Adjustable cast brass knuckle with thumb screw

Mounting: Brass round Canopy with 1/2" NPT threaded
female hub. CX-719B Brass mounting bracket
is also available.

Electrical Notes: A remote 12V transformer is required. Options are
available from Corona Lighting.
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 9V-17V.
Proper grease/lubricant is suggested on
threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against
manufacturer's defects.

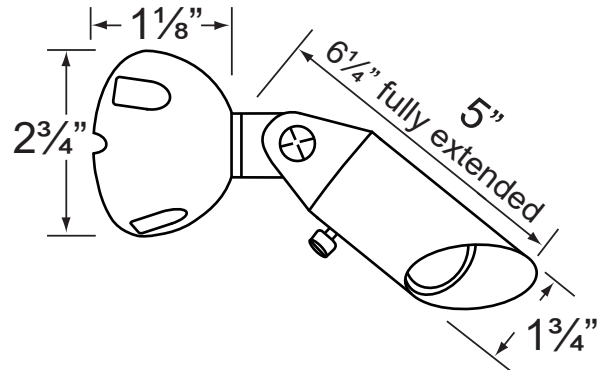

2.5W

ACCESSORY



Mounting Bracket

CX-719B-GM

GM- Gun Metal

Fixtures also available
with CX-719B-GM.
Price remains the same
as listed.

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.
L-ED11-2.5W	2.5	38° Flood	180	2700K

AVAILABLE HALOGEN LAMPS, Clear

LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.
L-FTB-20	20	10° NSP	500	3000K
L-FTH-35	35	30° Flood	900	3000K

AVAILABLE HALOGEN LAMPS, Front Glass

LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.
L-FTB-C20	20	10° NSP	460	3000K
L-FTH-C35	35	36° FL	1000	3000K

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

CL - 131B-GM - L-ED11 - 2.5W

Example: CL-131B-GM-L-ED11-2.5W

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.