



Commercial Recovery Machine

FM3600-410A



Features

- Recovers ALL commonly used refrigerants, including R-410A (Puron™)
- 550PSI high pressure cut-off, high pressure gauges
- LED System status display
- Rugged and reliable
- Automatic shut-off when evacuation is completed

FM3600-410A Commercial Recovery Unit

For commercial refrigerant recovery applications, the FM3600-410A can recover vapor at up to two pounds per minute and can tolerate liquid directly through its compressor. Its large condenser ensures fast recovery in the hottest environments. A self-purging valve allows the condenser and tubing to purge without hose changes. The suction and discharge gauges and LED status display keep the technician informed during each recovery step.

SPECIFICATIONS	
Refrigerants	All refrigerants except R-11, R-113 and R-123
Power Source	115 VAC 50/60 Hz, 230 VAC 50/60 Hz, 10 VAC 50/60 Hz
Compressor	0.5 HP high performance, oil less
Vacuum Rating	13" Hg+
High Pressure Limit	550 PSI
Recovery Rate	.30 - 2.0 lbs./min. vapor 4.0 lbs./min. liquid
Auto 80% Shut-Off	Optional
Self Purging System	No hose changes
Weight	35 lbs.
Dimensions	12" x 13" x 7.5"

ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
2000-3600	FM3600-410A Commercial Recovery Machine
2002-0081	80% Shut-Off Option

Headquarters: 621 Hunt Valley Circle, New Kensington, PA 15068 U.S.A.

Phone: 1-800-736-4666 Fax: 1-724-334-5001 Email: help@bacharach-inc.com Website: www.bacharach-inc.com



Commercial Recovery Machine

FM3600 R-S

Features

- Recovers ALL commonly used refrigerants, including R-410A (Puron™)
- Advanced oil-less compressor
- Hi-flow compressor head and valves
- LED system status display
- Simple operation/purges clean
- Contains integrated sight glass
- Automatic shut off when evacuation is completed




FM3600 R-S Commercial Recovery Unit

The FM3600 R-S is a high performance, easy to use commercial recovery machine. The unit includes an automatic 80% tank shut-off and has an integrated sight glass. The 3600 R-S's high performance coalescing oil separator and filter dryer can clean even the dirtiest of refrigerants.

SPECIFICATIONS	
Refrigerants	All refrigerants except R-11, R-113 and R-123
Power Source	115 VAC 50/60 Hz, 230 VAC 50/60 Hz, 100 VAC 50/60 Hz
Compressor	0.5 HP high performance, oil-less
Vacuum Rating	13" Hg+
High Pressure Limit	550 PSI
Recovery Rate	.30 - 2.0 lbs./min. vapor 4.0 lbs./min. liquid
Auto 80% Tank Shut-Off	Included
Self Purging System	No hose changes
Weight	38 lbs.
Dimensions	12" x 13" x 7.5"

Ordering Information	
PART NUMBER	DESCRIPTION
2000-3611	FM3600 R-S Commercial Recovery Machine

Distributed By:

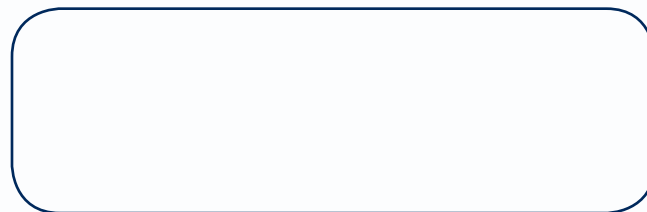

Technical Training for Heating & Cooling



Bacharach is a registered trademark of Bacharach, Inc.
 April 2005, Bacharach, Inc., all rights reserved. All information is subject to verification.
 Product Bulletin - 7003 04/05 2M BI
 Printed in U.S.A.

Headquarters: 621 Hunt Valley Circle
 New Kensington, PA 15068 U.S.A.

Phone: 1-800-736-4666 Website: www.bacharach-inc.com